


ENERGIZER NO. EN529

6V



Industry Standard Dimensions in mm (inches)

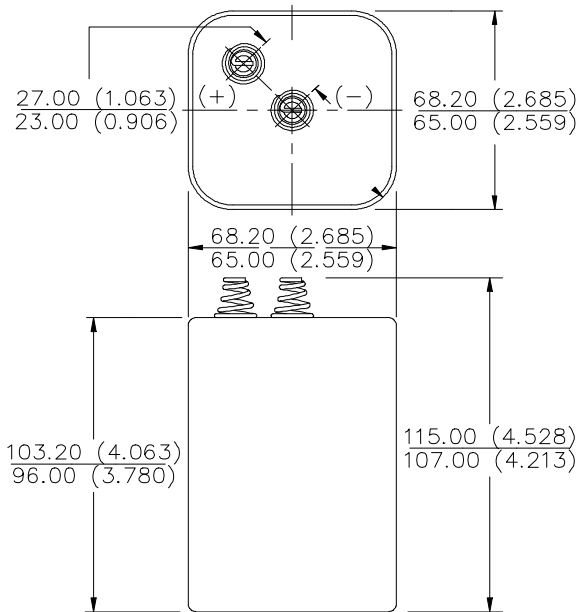


THIS BATTERY SHALL PASS FREELY THROUGH A CYLINDRICAL TUBE 82.6 DIAMETER X 101.6 LONG.


NOT INTENDED FOR RETAIL TRADE

- Chemical System:** Alkaline
Zinc-Manganese Dioxide (Zn/MnO₂)
(No Added Mercury or Cadmium)
- Designation:** ANSI-908A
- Battery Voltage:** 6.0 Volts
- Operating Temp:** -18°C to 55°C (0°F to 130°F)
- Average Capacity:** 18,000 mAh (to 0.8 volts/cell)
(Rated capacity at 25 mA continuous drain.)
- Average Weight:** 665 grams (23.5 oz.)
- Volume:** 440.4 cubic centimeters (26.9 cubic inch)
- Cell:** Four No. 3-350 in series
- Jacket:** Metal
- Terminal:** Coil Spring


TEMPERATURE EFFECTS Typical Service

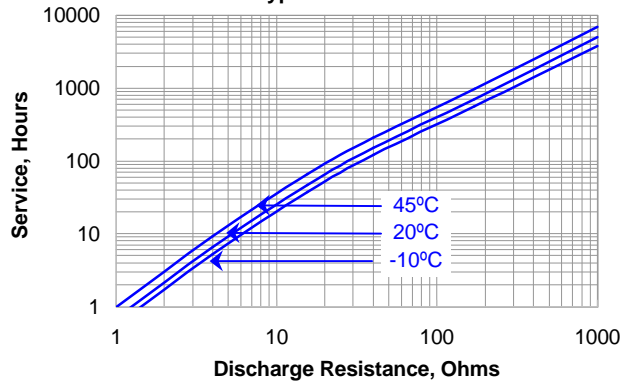

CONSTANT RESISTANCE PERFORMANCE Typical Service

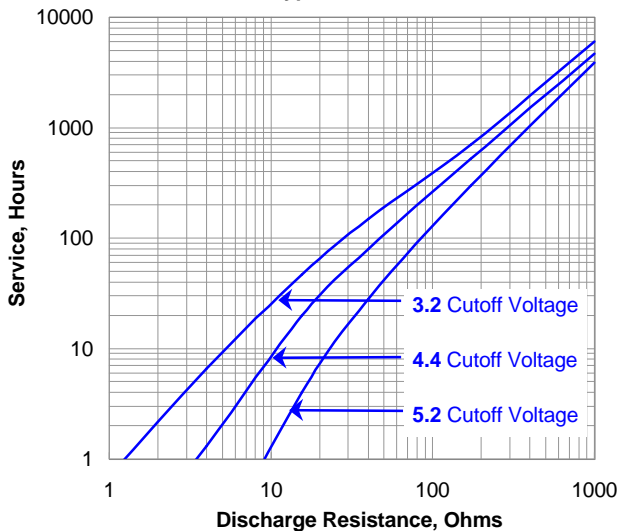

CONSTANT CURRENT DISCHARGE Typical Service

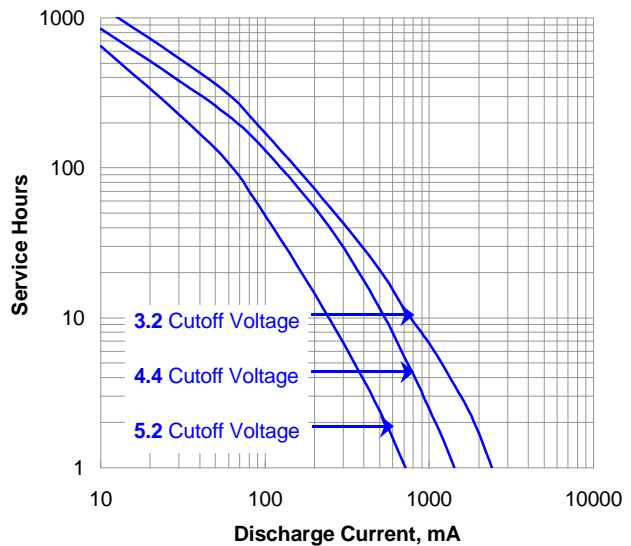

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.


Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved


ENERGIZER NO. EN529

ANSI - IEC Industry Standard Tests @ 20° C


Steady Burn Barricade
110 ohms 12 hours/day

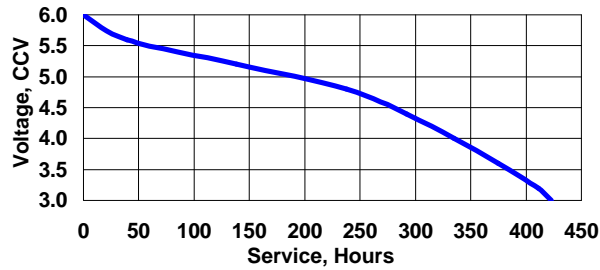

Portable Lighting
9.1 ohms 30 min/hour - 8 hours/day

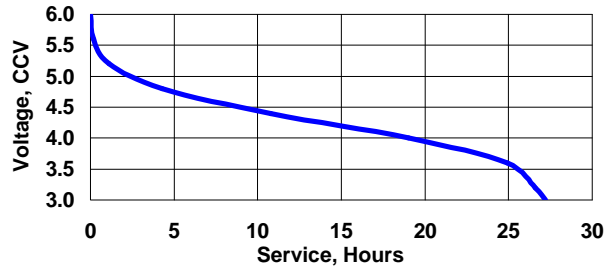

Portable Lighting
33 ohms 30 min/hour - 8 hours/day

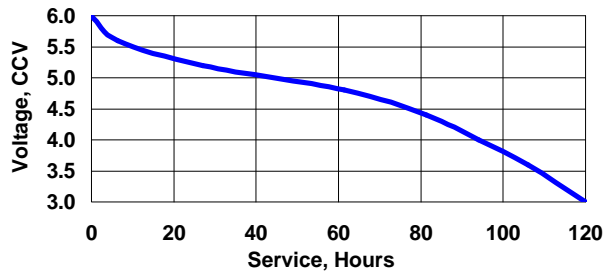

Important Notice

This data sheet contains information specific to batteries manufactured at the time of its publication.

Contents herein do not constitute a warranty.

Copyright © Eveready Battery Co. - All rights reserved