

MICRO ELECTRONICS

INT2404G

LED BACKLIGHT
FOR LCD DISPLAY


ABSOLUTE MAXIMUM RATINGS

Forward Current	IF	800mA
Reverse Voltage	VR	10V
Operating Temperature	Topr	-20 to +70°C
Storage Temperature	Tstg	-30 to +80°C


ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF	3.8	4.1	4.4	V	IF=40mA
Reverse Current	IR			400	μA	VR=10V
Peak Wavelength	λp		565		nm	IF=40mA
Spectral Line Half Width	Δλ		40		nm	IF=40mA
Brightness	B	50			cd/m ²	IF=40mA

MECHANICAL OUTLINE

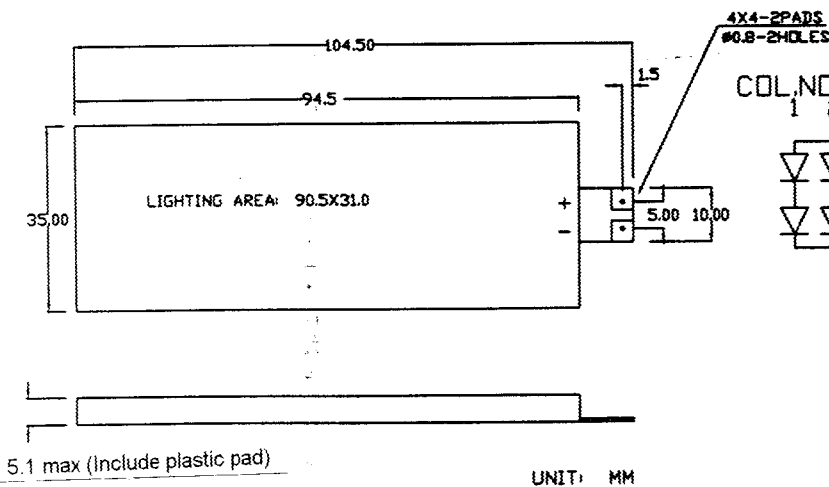

CIRCUIT DIAGRAM

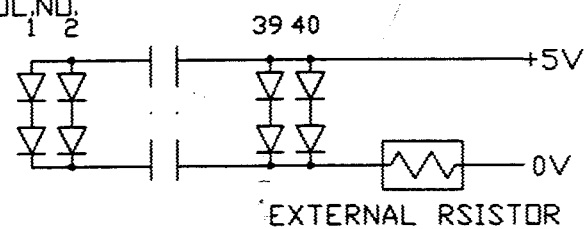

MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex: 43510 Micro Hk. Tel: 2343 0181-5