

**E-Series Surface Mount Mixer
80 – 2500 MHz**

**MAMXES0117
V4**


Features

- LO Power +17 dBm
- Up to +14 dBm RF
- Surface Mount
- RoHS* Compliant version of the ESMD-C50H
- Tape and reel packaging available

Description

M/A-COM's MAMXES0117 is a RoHS compliant device that is equivalent to the ESMD-C50H mixer. This device is a Low Cost, Passive Double Double Balanced Mixer. Constructed using very broad band ferrite balun transformers and matched silicon schottky diodes, it's performance is especially suited to high dynamic range receivers. Given it's high 1dB compression point, the MAMXES0117 is also suitable for Transmitter upconversion at any frequency up to 2.5GHz. The MAMXES0117 is offered in an SM-2 surface mount package and is designed to be utilized in both standard reflow and high temperature soldering reflow profiles.

SM — 2 Package

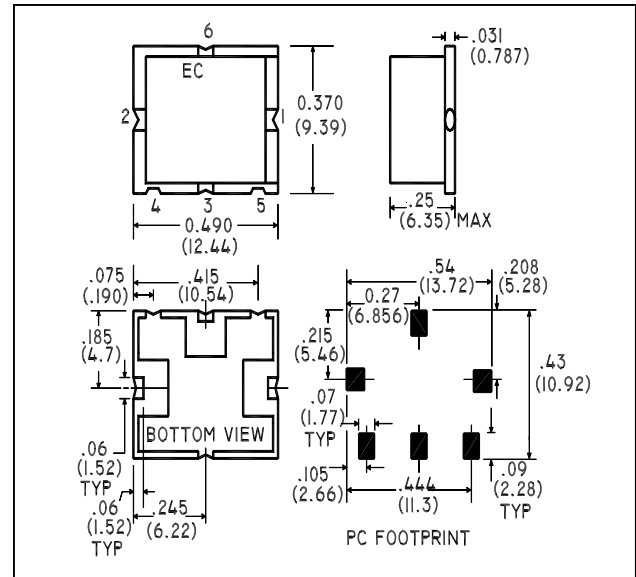

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

| Parameter | Test Conditions | Frequency | Units | Min | Typ | Max |
|-----------------|-------------------------------------|-------------|-------|------|------|-----|
| Frequency | IF 1.0 dB bandwidth = DC - 1000 MHz | 80 -2500 | MHz | — | — | — |
| Conversion Loss | — | 80 - 1000 | dB | — | 6.1 | 7.5 |
| | | 1000 - 2500 | dB | — | 7.34 | 9.0 |
| Isolation | LO to RF | 80 - 1000 | dB | 25 | 33.5 | — |
| | | 1000 - 2500 | dB | 20 | 28.9 | — |
| Isolation | LO to IF | 80 - 1000 | dB | 26 | 31.5 | — |
| | | 1000 - 2500 | dB | 13.5 | 17.4 | — |
| Isolation | RF to IF | 80 - 1000 | dB | 20 | 26.9 | — |
| | | 1000 - 2500 | dB | 20 | 25.9 | — |
| VSWR | LO | 80 - 1000 | — | — | 1.42 | 2.0 |
| | | 1000 - 2500 | — | — | 1.63 | 2.5 |
| VSWR | RF | 80 - 1000 | — | — | 1.72 | 2.8 |
| | | 1000 - 2500 | — | — | 1.71 | 2.4 |

Ordering Information

| Part Number | Package |
|-------------|---------------------------------|
| MAMXES0117 | Tape and Reel (500 piece reels) |

¹ * Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

M/A-COM Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. M/A-COM makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does M/A-COM assume any liability whatsoever arising out of the use or application of any product(s) or information.

• **North America** Tel: 800.366.2266 / Fax: 978.366.2266
 • **Europe** Tel: 44.1908.574.200 / Fax: 44.1908.574.300
 • **Asia/Pacific** Tel: 81.44.844.8296 / Fax: 81.44.844.8298

Visit www.macom.com for additional data sheets and product information.

E-Series Surface Mount Mixer
80 – 2500 MHz

MAMXES0117
V4


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

| Parameter | Test Conditions | Frequency | Units | Min | Typ | Max |
|------------------------|-----------------|-------------|-------|-----|------|-----|
| VSWR | IF | DC - 600 | — | — | 2.55 | 3.2 |
| Input IP3 | — | 200 - 1000 | dBm | 21 | 27 | — |
| | | 1000 - 2500 | dBm | 18 | 25 | — |
| Input 1 dB Compression | — | 80 -2500 | dBm | — | 14.0 | — |

Pin Configuration

| Pin No. | Function |
|---------|----------|
| 1 | RF |
| 2 | LO |
| 3 | IF |
| 4 | Ground |
| 5 | Ground |
| 6 | Ground |

Schematic

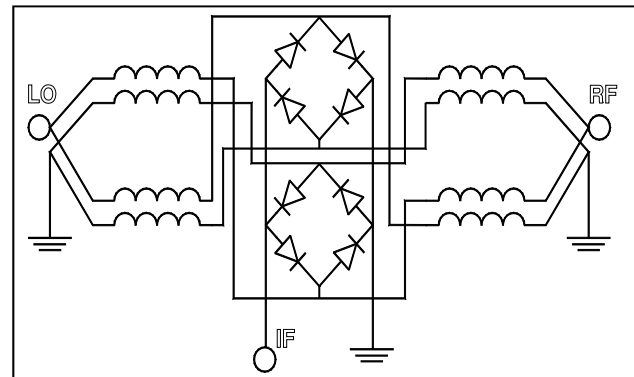


Absolute Maximum Ratings¹

| Parameter | Absolute Maximum |
|-----------------------|------------------|
| RF Input Power | +23 dBm |
| LO Drive Power | +23 dBm |
| Operating Temperature | -40°C to +85°C |
| Storage Temperature | -55°C to +125°C |


1. Operation of this device above any one of these parameters may cause permanent damage.

Typical Performance Curves


Conversion Loss

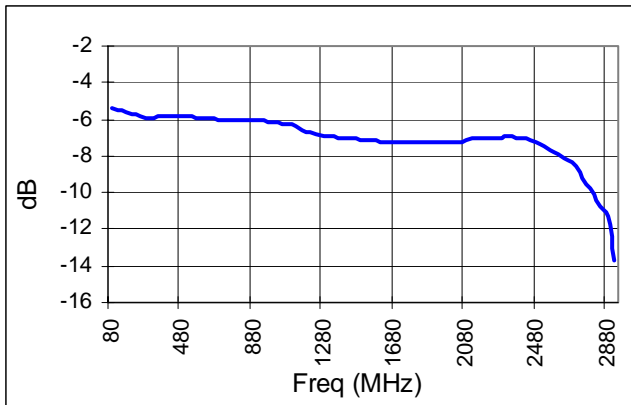


LO & RF VSWR

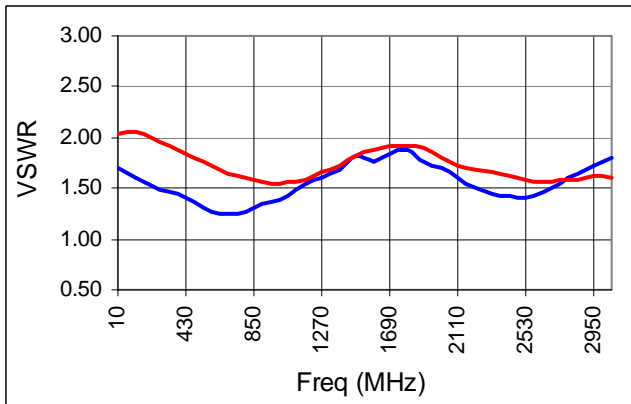


IF Bandwidth

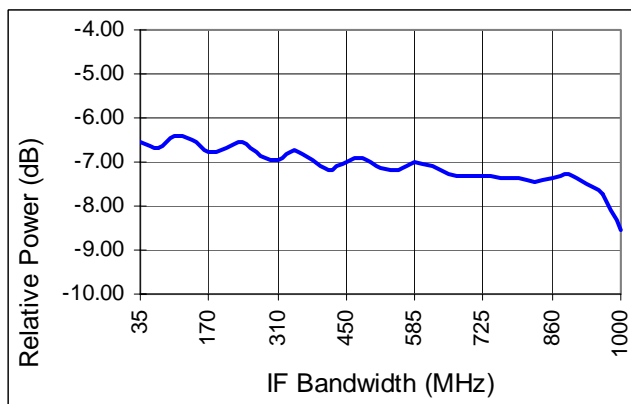


Isolation

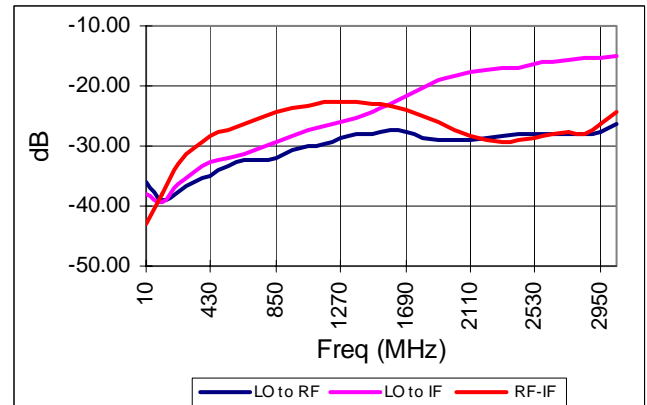

IF VSWR

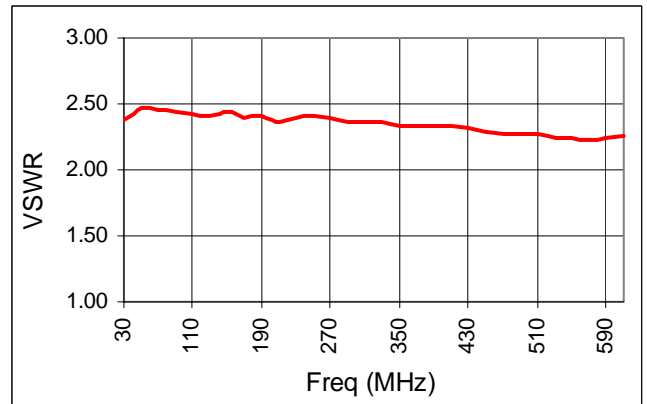

IIP3 & 1 dB Compression

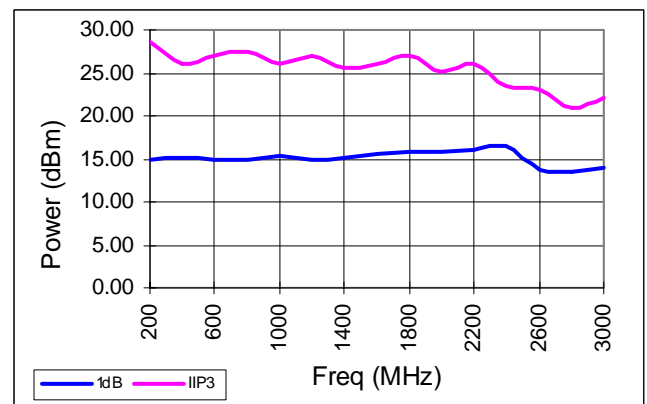

Spurious Table: 1800MHz

(In dBc below IF, assuming down conversion)

| | | nf _{LO} - mf _{RF} | | | | |
|-----|---|-------------------------------------|----|----|----|-------|
| | 0 | X | -6 | 12 | 21 | 13 |
| | 1 | 29 | 0 | 35 | 18 | 42 |
| RF | 2 | 64 | 58 | 58 | 51 | 72 |
| (n) | 3 | 76 | 80 | 78 | 76 | 73 |
| | 4 | 83 | 85 | 85 | 82 | 85.34 |
| | | 0 | 1 | 2 | 3 | 4 |
| | | LO (m) | | | | |

RF = 1842.50 MHz, -5dBm
LO = 1772.50 MHz, +17dBm
IF = 70 MHz

(In dBc below IF, assuming down conversion)

| | | nf _{LO} - mf _{RF} | | | | |
|-----|---|-------------------------------------|----|----|----|----|
| | 0 | X | 2 | 14 | 12 | 29 |
| | 1 | 20 | 0 | 37 | 12 | 39 |
| RF | 2 | 25 | 26 | 38 | 27 | 32 |
| (n) | 3 | 46 | 41 | 44 | 43 | 44 |
| | 4 | 57 | 56 | 54 | 55 | 57 |
| | | 0 | 1 | 2 | 3 | 4 |
| | | LO (m) | | | | |

RF = 970 MHz, -5dBm
LO = 900 MHz, +17dBm
IF = 70 MHz

Spurious Table: 1900MHz

(In dBc below IF, assuming down conversion)

| | | nf _{LO} - mf _{RF} | | | | |
|-----|---|-------------------------------------|----|----|----|----|
| | 0 | X | -8 | 21 | 16 | 19 |
| | 1 | 24 | 0 | 39 | 17 | 50 |
| RF | 2 | 29 | 32 | 29 | 22 | 31 |
| (n) | 3 | 51 | 46 | 51 | 41 | 50 |
| | 4 | 52 | 55 | 55 | 52 | 55 |
| | | 0 | 1 | 2 | 3 | 4 |
| | | LO (m) | | | | |

RF = 1960 MHz, -5dBm
LO = 1890 MHz, +17dBm
IF = 70 MHz