

## SEVEN SEGMENT NUMERIC DISPLAY

- High Performance Dice
- 0.36 inch Character Height
- High Contrast
- Wide Viewing Angle
- Common Anode - MG136A-3
- Common Cathode - MG136C-3

## ABSOLUTE MAXIMUM RATINGS

Power Dissipation / Segment	75mW
Peak Forward Current / Segment*	100mA
Continuous Forward Current / Segment	25mA
Reverse Voltage / Segment	5V
Operating Temperature Range	-25 to +85°C
Storage Temperature Range	-25 to +85°C

\* Note : Pulse Width = 1mS, Duty Ratio = 1/10.


## ELECTRO-OPTICAL CHARACTERISTICS (Ta=25°C)

PARAMETER	SYMBOL	MIN	TYP	MAX	UNIT	CONDITIONS
Forward Voltage	VF			3.0	V	IF=20mA
Luminous Intensity	IV	1.5	2		mcd	IF=10mA
Segment to Segment Luminous Intensity Ratio				2:1		IF=20mA
Wave length at Peak Emission	$\lambda_p$		565		nm	IF=20mA
Spectral Line Half Width	$\Delta\lambda$		35		nm	IF=20mA



MICRO ELECTRONICS LTD.  
38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.  
Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

MECHANICAL OUTLINE:

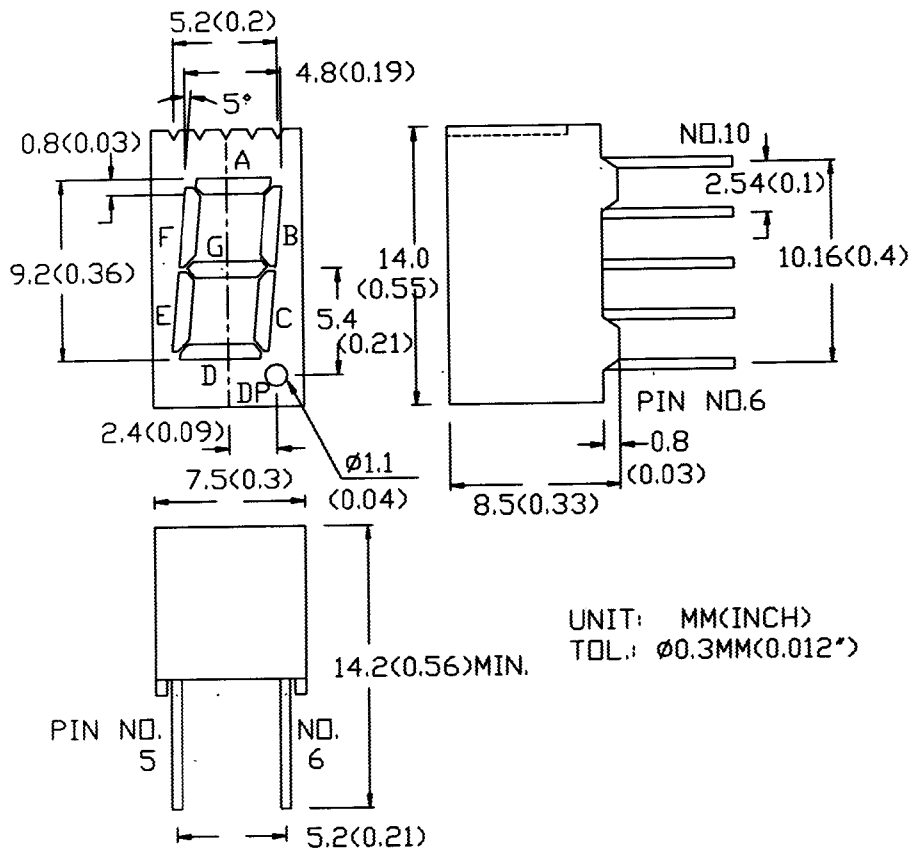

CIRCUIT DIAGRAM:

