


FEATURES

- HIGH K DIELECTRIC
- HIGH CAPACITANCE DENSITY
- EXCELLENT MECHANICAL STRENGTH
- NICKEL BARRIER TERMINATIONS


**RoHS
Compliant**
includes all homogeneous materials

*See Part Number System for Details




Capacitance Range	0.01 μ F ~ 0.82 μ F (see high CV datasheet for higher capacitance values)
Capacitance Tolerance	+80%/-20% (Z)
Operating Temperature Range	-30°C ~ +85°C
Temperature Characteristics	+22%, -82% max. capacitance Δ over temperature range
Rated Voltages	6.3Vdc, 16Vdc, 25Vdc, 50Vdc & 100Vdc (see NMC-H Series for higher voltages)
Dissipation Factor	(See Values Table)
Insulation Resistance	10Gigohms min. or 500Megohm/ μ F min. whichever is less @ +25°C
Dielectric Withstanding Voltage	150% of Rated Voltage for 5 \pm 1 seconds, 50mA maximum current
Test Conditions (EIA-198-2E)	1KHz, 1.0V \pm 0.2Vrms

Typical Y5V C and DF Change over Temp.

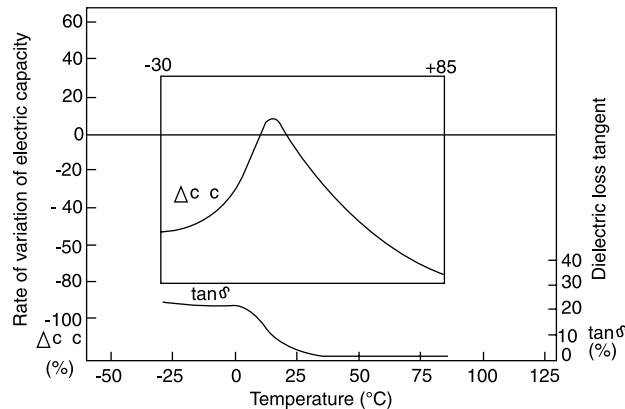

PART NUMBER SYSTEM

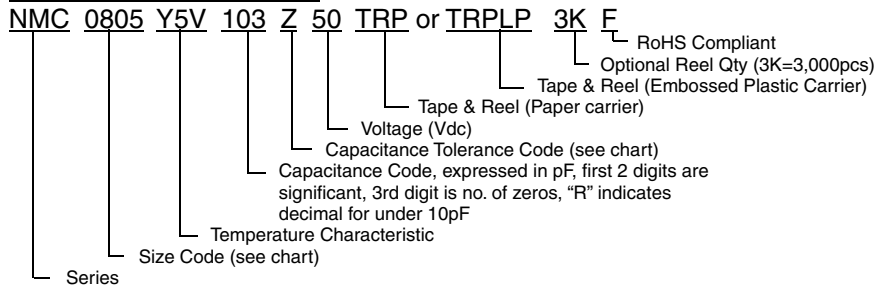


Y5V CAPACITOR SIZE AND DISSIPATION FACTOR CHART (mm)

EIA Case Size	0201		0402				0603				0805				1206								
Length (L)	0.6 ± 0.05		1.0 ± 0.05				1.6 ± 0.15				2.0 ± 0.2				3.2 ± 0.2								
Width (W)	0.3 ± 0.05		0.5 ± 0.05				0.8 ± 0.15				1.25 ± 0.2				1.6 ± 0.2								
Thickness max. (T)	0.33		0.6				1.0				1.30				1.80								
Termination Width (P)	0.10 ~ 0.20		0.2±0.1				0.12 ~ 0.51				0.25 ~ 0.71				0.25 ~ 0.71								
Capacitance	Working Voltage (Vdc)																						
	4	10	6.3	10	16	25	50	10	16	25	50	6.3	10	16	25	50	100	6.3	10	16	25	50	100
0.01µF				12.5%	9%	7%	7%	12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.015µF				12.5%	9%	7%	7%	12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.022µF	16%	12.5%	16%	12.5%	9%	7%	7%	12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.027µF	16%	12.5%	16%	12.5%	9%	7%	7%	12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.033µF	16%	12.5%	16%	12.5%	9%	7%	7%	12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.036µF	16%	12.5%	16%	12.5%	9%	7%		12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.039µF	16%	12.5%	16%	12.5%	9%	7%		12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.047µF	16%	12.5%	16%	12.5%	9%	7%		12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.056µF	16%		16%	12.5%	9%			12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.068µF	16%		16%	12.5%	9%			12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.075µF	16%		16%	12.5%	9%			12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.082µF	16%		16%	12.5%	9%			12.5%	7%	5%	5%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.1µF			16%	12.5%	9%			12.5%	7%	7%	7%	16%	12.5%	9%	5%	5%	5%	16%	12.5%	9%	5%	5%	5%
0.15µF			16%	12.5%				12.5%	9%	9%	9%	16%	12.5%	9%	5%	5%		16%	12.5%	9%	5%	5%	5%
0.18µF			16%	12.5%				12.5%	9%	9%	9%	16%	12.5%	9%	5%	5%		16%	12.5%	9%	5%	5%	5%
0.22µF			16%	12.5%				12.5%	9%	9%	9%	16%	12.5%	9%	5%	5%		16%	12.5%	9%	5%	5%	5%
0.27µF			16%	12.5%				12.5%	12.5%	9%		16%	12.5%	9%	5%	5%		16%	12.5%	9%	5%	5%	
0.33µF			16%	12.5%				12.5%	12.5%	9%		16%	12.5%	9%	7%	7%		16%	12.5%	9%	5%	5%	
0.36µF			16%	12.5%				12.5%	12.5%	9%		16%	12.5%	9%	9%			16%	12.5%	9%	5%	5%	
0.39µF			16%	12.5%				12.5%	12.5%	9%		16%	12.5%	9%	9%			16%	12.5%	9%	5%	5%	
0.47µF			16%	12.5%				12.5%	12.5%	9%		16%	12.5%	9%	9%			16%	12.5%	9%	5%	5%	
0.56µF			16%					12.5%	12.5%	9%		16%	12.5%	9%	9%			16%	12.5%	9%	5%	5%	
0.68µF			16%					12.5%	12.5%	9%		16%	12.5%	9%	9%*			16%	12.5%	9%	5%	5%	
0.82µF			16%					12.5%	12.5%	9%		16%	12.5%	9%	9%*			16%	12.5%	9%	5%	5%	

*1.35mm maximum thickness

(CONSULT FACTORY FOR CAPACITANCE VALUES NOT LISTED)

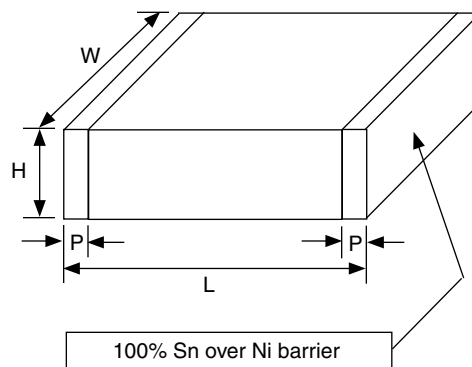

See NMC high CV series for values above 0.82µF