

Electrical Specifications at 25°C


Part Number	Insertion Loss (dB MAX)	Return Loss (Typ) in MHz			Crosstalk (dB MIN)			Differential to Common Mode Rejection (dB MIN)			Turns Ratio		Hipot (Vrms Min.)
		50MHz	60MHz	80MHz	30MHz	60MHz	100MHz	30MHz	50MHz	100MHz	TX	RX	
T-17009	1.1	-20	-14	-11.5	-45	-40	-35	-42	-37	-33	1:1	1:1	1500

■ Meets all IEE 802.3 and ANSI X3.263 standards including 350 μH OCL with 8 mA bias

■ Mil. Grade Epoxy encapsulated package withstands 235°C IR reflow


■ Tape and Reel available.

Schematic Diagram

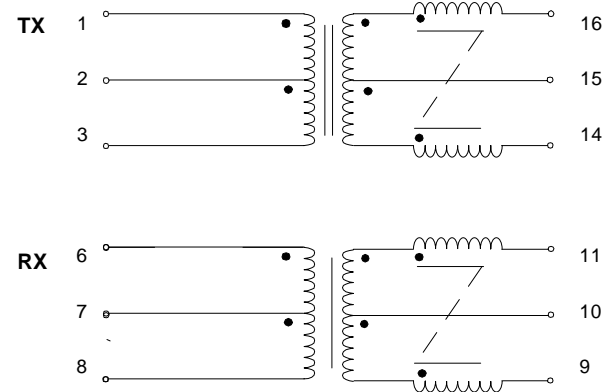

Dimensions in inches (mm)

(Unused Pin 4 is omitted)

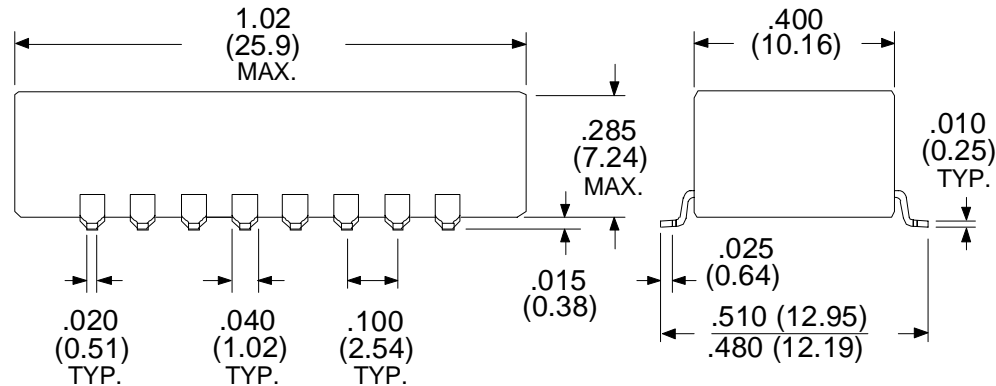

RHOMBUS P/N: **T-17009**

CUST P/N:

NAME: