

VI TELEFILTER**Filter Specification****TFS 70L30****1/4****1. Measurement condition**Ambient temperature T_A :

25 °C

Input power level:

0 dBm (typ.)

Max 10 dBm.

Terminating impedances in f_c :

for input:

215 Ω | -6,05 pF.[50 Ω + j (55±5) Ω]

for output:

1190 Ω | -3,37 pF.[50 Ω + j (55±5) Ω]

(see page 2.)

2. Characteristics

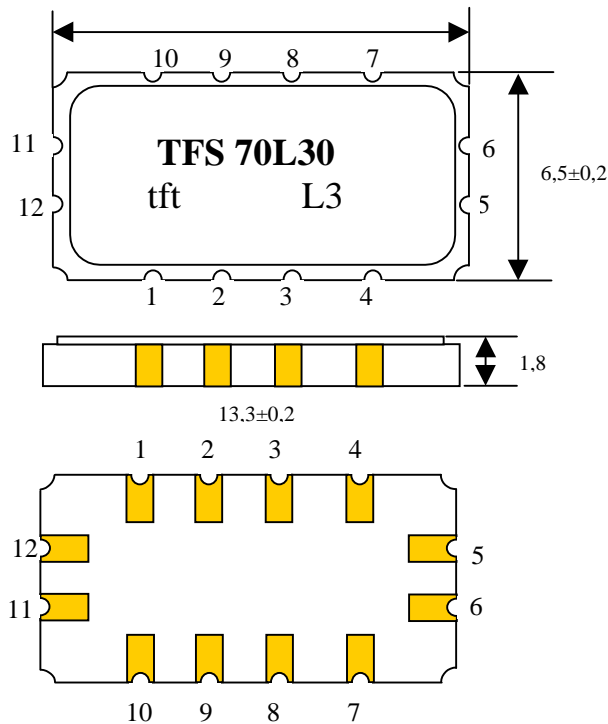
Remark:

Reference level for the relative attenuation a_{rel} of the **TFS 300A** is the minimum of the pass band attenuation a_{min} . The minimum of the pass band attenuation a_{min} is defined as the insertion loss a_e . The centre frequency f_c is the arithmetic mean value of the upper and lower frequencies at the 3 dB filter attenuation level relative to the insertion loss a_e . The nominal frequency f_N is fixed on **300 MHz** without tolerance. The given values for the relative attenuation a_{rel} and for the group delay ripple have to be reached at the frequencies given below also if the centre frequency f_o is shifted due to the temperature coefficient of frequency TC_f in the operating temperature range and due to a production tolerance for the centre frequency f_c .

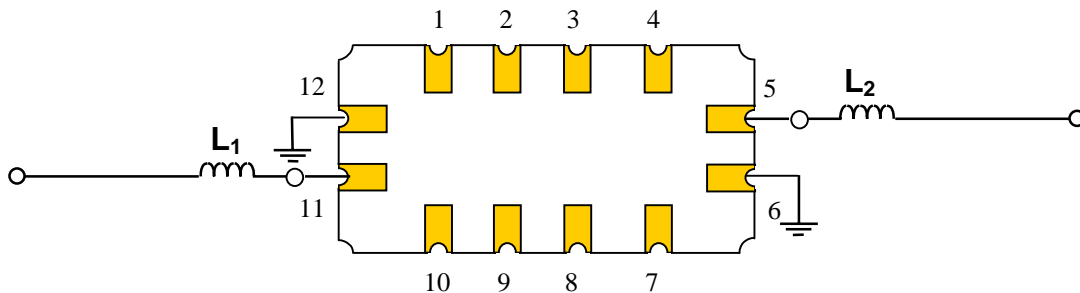
Data		typ. value	tolerance / limit
Insertion loss (Reference level) a_e		16,3 dB	max 20 dB
Nominal frequency f_N at ambient temperature (f_{NTA})		- MHz	300 MHz
Centre frequency f_c at ambient temperature (f_{CTA})		300 MHz	MHz
1 dB - band width		4,55 MHz	
3 dB - band width		5,25 MHz	
20 dB - band width		6,96 MHz	
40 dB - band width		9,30 MHz	
Amplitude ripple (p-p): $f_N \dots f_N \pm 2,05$ MHz		0,8 dB	max 1,0 dB
Relative attenuation a_{rel}			
$f_N \pm 2,05$ MHz	$f_N \pm 2,05$ MHz	-	max 1 dB
$f_N \pm 2,75$ MHz	$f_N \pm 2,5$ MHz	-	max 3 dB
$f_N \pm 5,0$ MHz	$f_N \pm 5,0$ MHz	-	min 3 dB
$f_N \pm 7$ MHz	$f_N \pm 7,0$ MHz	43...45 dB	min 40 dB
$f_N - 290$ MHz	$f_N \pm 100$ MHz	55...70 dB	min 50 dB
$f_N + 100$ MHz	$f_N - 100$ MHz	90 dB	- dB
	$f_N + 700$ MHz	90 dB	- dB
Group delay		1,1 μ s	- μ s
Group delay ripple (p-p)	$f_N \dots f_N \pm 2,2$ MHz	± 35 ns	\pm max 50 ns
Deviation from linear phase (p-p)	$f_N \dots f_N \pm 1,8$ (2,5) MHz	2° (2,6°)	
Triple transit attenuation compared to main signal		39 dB	
Input/Output return loss with matching network (S11/S22):		T.B.M. dB	
Crosstalk		60...65 dB	
Substrate material		Quartz	
Frequency inversion temperature (T_o)		-20°	
Temperature coefficient of frequency (TC_f)		-0,0297 ppm/K ²	-0,036 ppm/K ²
Frequency deviation of f_o over temperature: *)		$\Delta f_o(\text{Hz}) = TC_f(\text{ppm/K}) \times (T - T_o)^2 \times f_o$ (MHz)	
Operating temperature range		- 20 °C ... + 70 °C	
Storage temperature range		- 40 °C ... + 85 °C	

*) f_{T_o} is reference frequency f_c at frequency inversion temperature (T_o)**5. Responsible:****Generated:****Dunzow W.****Checked/Approved:****Dr. Bert Wall****VI TELEFILTER****Potsdamer Straße 18****D 14 513 TELTOW / Germany****Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30****E-Mail: tft@telefilter.com****Vectron International, Inc.****267 Lowell Road****Hudson, NH 03051 / USA****Tel: (603) 598-0070 Fax: (603) 598-0075****E-Mail: vti@vtinh.com**

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

VI TELEFILTER**Filter Specification****TFS 70L30****2/4****3. Package, pin grid 2,54 mm**

Pin 11 - Input.
 Pin 12 - Input RF Return.
 Pin 5 - Output.
 Pin 6 - Output RF Return.
 Pin 1-2-3-4-7-8-9-10 PackageGround.

4. 50 Ω matching network:

$$L_1 = 120 \pm 20 \text{ nH.}$$

$$L_2 = 120 \pm 20 \text{ nH.}$$

These values will be influenced by your board design.

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtnh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Stability characteristics

After the following tests the filter shall meet the whole specification:

1. Shock: 30g, 18 ms, half sine wave, 3 shocks each plane;
DIN IEC 68 T2 - 27
2. Vibration: 10 Hz to 150 Hz, 0.35 mm amplitude, 5g; 2 hours for 3 planes;
DIN IEC 68 T2 - 6
3. Damp heat: 90 % to 95 % rel. humidity, 40 °C, 10 days;
(steady state) DIN IEC 68 - 2 - 3
4. Resistance to solder heat (reflow): max. 2 times reflow process;
for temperature conditions refer to the attached "Air reflow temperature conditions" on sheet 4;

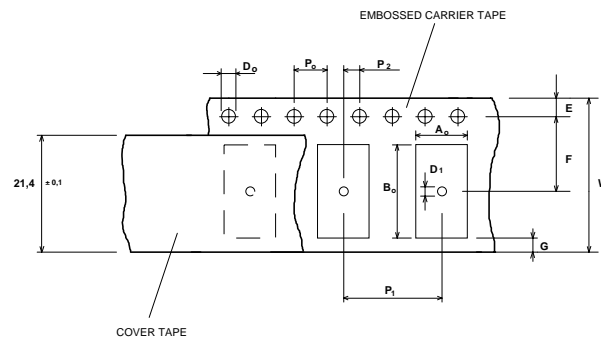
Packing

Tape & Reel: DIN IEC 286 - 3, with exception of value for N and minimum bending radius;
tape type II, embossed carrier tape with top cover tape on the upper side;

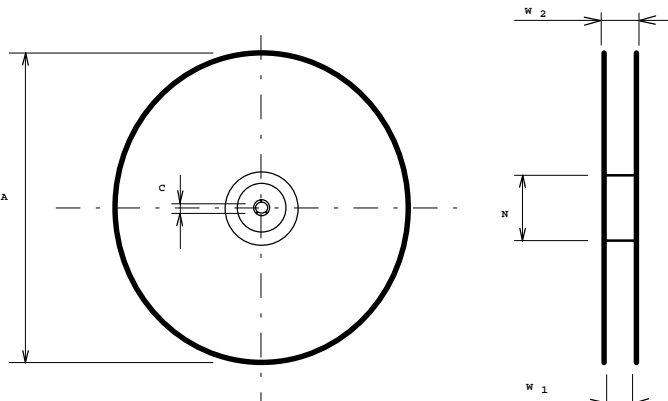
max. pieces of filters per reel: 1700

Tape (all dimensions in mm)

W	: 24	± 0,3
Po	: 4	± 0,1
Do	: 1,5	+ 0,5
D1	: 1,5	+ 0,5
E	: 1,75	± 0,1
F	: 11,5	± 0,1
G (min)	: 0,75	
P2	: 2	± 0,1
P1	: 12	± 0,1
D1(min)	: 1,5	
Ao	: 7,1	± 0,2
Bo	: 13,9	± 0,2

**Reel (all dimensions in mm):**

A	:	330
W1	:	24,4 +2
W2 (max)	:	30,4
N (min)	:	>= 90
C	:	13 ± 0,25



VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

Air reflow temperature conditions

1st and 2nd air reflow profile

Name:	pre-heating periods	main-heating periods	peak temperature
Temperature:	150 °C - 170 °C	over 200 °C	255 °C ± 5 °C
Time:	60 sec. - 90 sec.	20 sec. - 25 sec.	

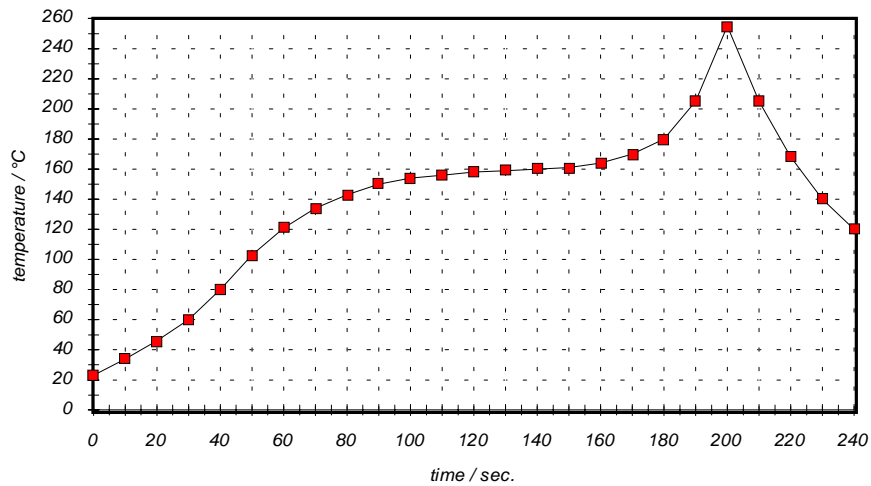
Chip-mount air reflow profile

Table for temperature vs. time during the air reflow process

Tolerance of temperatures: ± 5 °C

time / sec.	temperature / °C	time / sec.	temperature / °C
0	23	140	160
10	34	150	161
20	46	160	164
30	60	170	170
40	80	180	180
50	103	190	205
60	121	195	230
70	134	200	255
80	143	205	230
90	150	210	205
100	154	215	180
110	156	220	165
120	158	230	140
130	159	240	120

VI TELEFILTER
 Potsdamer Straße 18
 D 14 513 TELTOW / Germany
 Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
 E-Mail: tft@telefilter.com

Vectron International, Inc.
 267 Lowell Road
 Hudson, NH 03051 / USA
 Tel: (603) 598-0070 Fax: (603) 598-0075
 E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information

VI TELEFILTER
Potsdamer Straße 18
D 14 513 TELTOW / Germany
Tel: (+49) 3328 4784-52 / Fax: (+49) 3328 4784-30
E-Mail: tft@telefilter.com

Vectron International, Inc.
267 Lowell Road
Hudson, NH 03051 / USA
Tel: (603) 598-0070 Fax: (603) 598-0075
E-Mail: vti@vtinh.com

VI TELEFILTER reserves the right to make changes to the product(s) and/or information contained herein without notice. No liability is assumed as a result of their use or application. No rights under any patent accompany the sale of any such product(s) or information