

ZMR330


3.3 VOLT MINIATURE VOLTAGE REGULATOR

DESCRIPTION

The ZMR330 is a 3 terminal fixed 3.3 volt, 50mA, regulator. Internal current limiting and thermal overload protection are included thus protecting the device from some extreme operating conditions.

The circuit design offers low quiescent current of 170 μ A. Making the part suitable for low power applications.

The ZMR330 is designed with space saving in mind and the small SOT23 package is ideal where space is restricted.



SOT23


FEATURES

- 3.3 volt output
- 5V to 24V input range
- 50mA output current
- 170 μ A quiescent current.
- -55 to +125°C operating temperature
- SOT23 package

APPLICATIONS

- Local power supply
- Automotive
- Industrial

PINOUT



TOP VIEW

ORDERING INFORMATION

DEVICE	PACKAGE	REEL SIZE	TAPE WIDTH	QUANTITY PER REEL
ZMR330FTA	SOT23	7"	8mm	3,000

DEVICE MARKING

- 330

ZMR330

ABSOLUTE MAXIMUM RATINGS

Input voltage	-0.6 to 24V
Output current	100mA
Operating temperature	-55 to 125°C
Storage temperature	-65 to 150°C
Maximum junction temperature	150°C
Package power dissipation	400mW at $T_A = 25^\circ\text{C}$ (De-rate to zero at 150°C)

The maximum power dissipation for the SOT23 package is calculated assuming that the device is mounted on a FR4 substrate measuring 15 x 15 x 0.6 mm.

Operation above the absolute maximum rating may cause device failure. Operation at the absolute maximum ratings, for extended periods, may reduce device reliability.

ELECTRICAL CHARACTERISTICS


Test Conditions $T_A = 25^\circ\text{C}$, $V_{in+} = 7\text{V}$, $I_{out} = 10\text{mA}$ unless otherwise specified

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{out}	Output voltage		3.217	3.3	3.383	V
		$I_o = 0$ to 50mA. $T_j = -55$ to $+125^\circ\text{C}$	3.148		3.393	V
		$V_{in} = 5$ to 24V, $T_j = -55$ to 125°C	3.148		3.408	V
ΔV_{out}	Line regulation	$V_{in} = 5$ to 24V		1	10	mV
ΔV_{out}	Load regulation	$I_o = 0$ to 50mA		20	50	mV
		$I_o = 0$ to 10mA		13		mV
I_s	Supply current	$T_j = -55$ to 125°C		120	170	μA
ΔI_s	Supply current change	$I_o = 0$ to 50mA		5	10	μA
		$V_{in} = 5$ to 20V		2	10	μA
V_n	Output noise voltage	$F = 10\text{Hz}$ to 10kHz		80		$\mu\text{V rms}$
$\Delta V_{in}/\Delta V_{out}$	Ripple rejection	$V_{in} = 6$ to 20V, $f = 120\text{Hz}$	55			dB
V_{in}	Input voltage required to maintain regulation	$V_{out} = 3.217\text{V}$	4.80	4.74		V

NOTES


(1) Output capacitor of 1nF is recommended.

TYPICAL CHARACTERISTICS

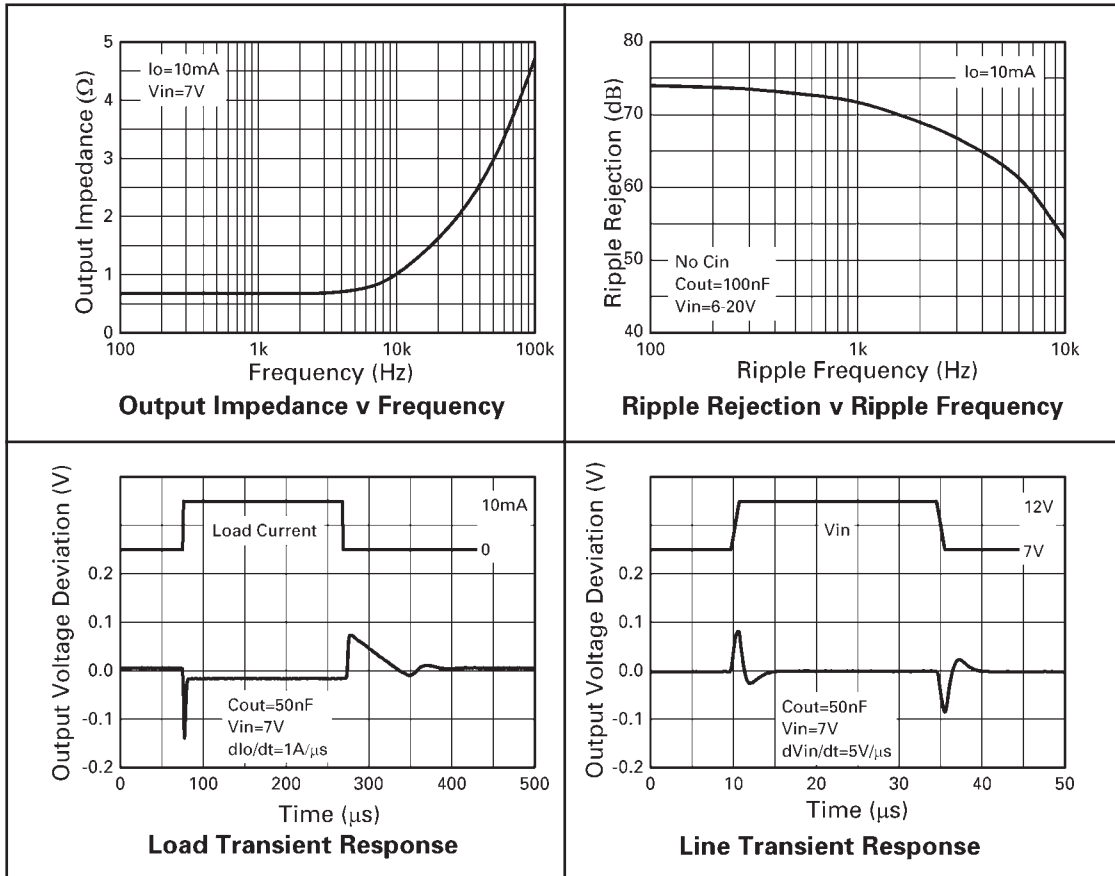

ZMR330

TYPICAL CHARACTERISTICS

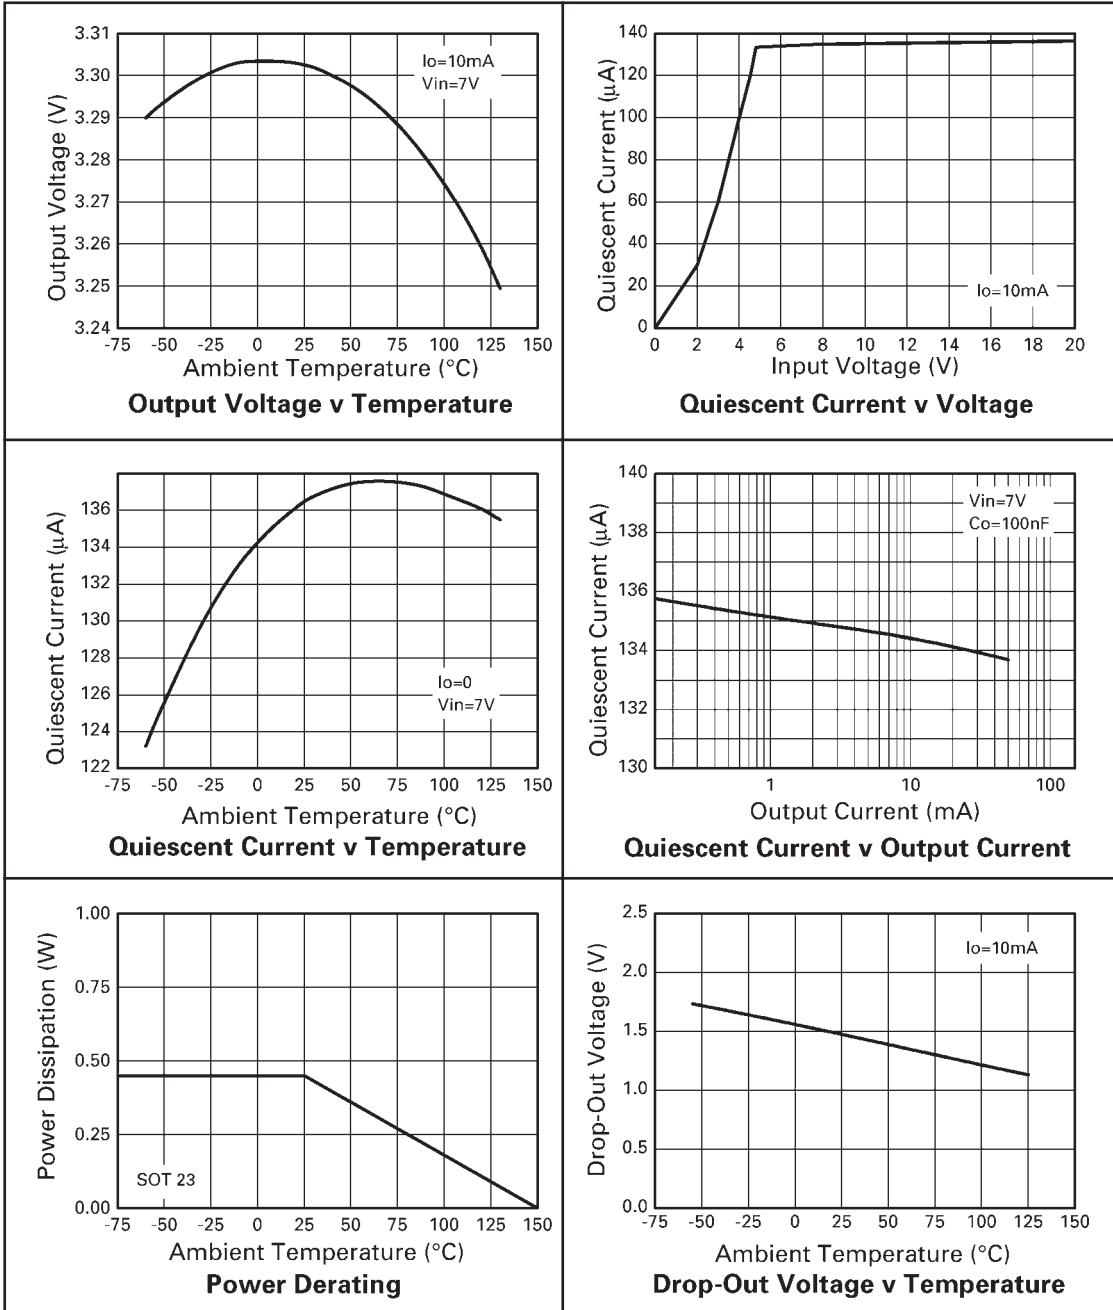

ZMR330

NOTES:

ZMR330


NOTES:

ZMR330


NOTES:

ZMR330

PACKAGE OUTLINE

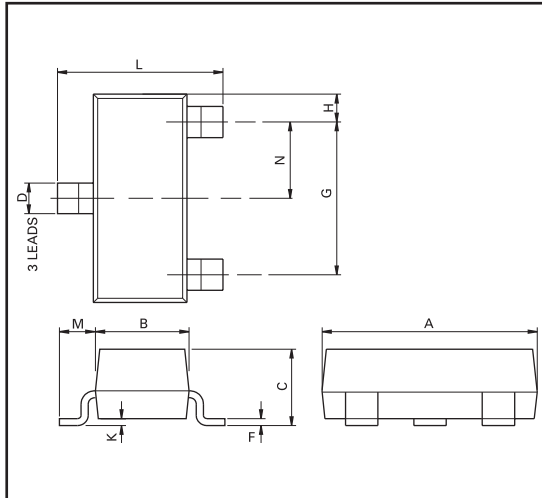

PAD LAYOUT DETAILS

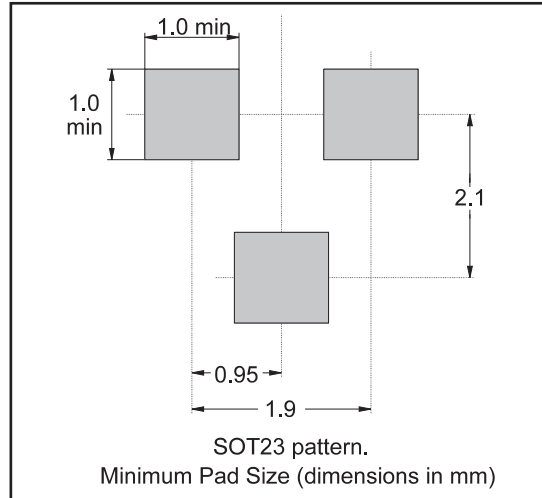

Controlling dimensions are in millimeters. Approximate conversions are given in inches

PACKAGE DIMENSIONS

DIM	Millimeters		Inches		DIM	Millimeters		Inches	
	Min	Max	Min	Max		Min	Max	Max	Max
A	2.67	3.05	0.105	0.120	H	0.33	0.51	0.013	0.020
B	1.20	1.40	0.047	0.055	K	0.01	0.10	0.0004	0.004
C	—	1.10	—	0.043	L	2.10	2.50	0.083	0.0985
D	0.37	0.53	0.015	0.021	M	0.45	0.64	0.018	0.025
F	0.085	0.15	0.0034	0.0059	N	0.95 NOM		0.0375 NOM	
G	1.90 NOM		0.075 NOM		—	—		—	

© Zetex Semiconductors plc 2005

Europe	Americas	Asia Pacific	Corporate Headquarters
Zetex GmbH Streitfeldstraße 19 D-81673 München Germany	Zetex Inc 700 Veterans Memorial Hwy Hauppauge, NY 11788 USA	Zetex (Asia) Ltd 3701-04 Metroplaza Tower 1 Hing Fong Road, Kwai Fong Hong Kong	Zetex Semiconductors plc Zetex Technology Park Chadderton, Oldham, OL9 9LL United Kingdom
Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 europe.sales@zetex.com	Telephone: (1) 631 360 2222 Fax: (1) 631 360 8222 usa.sales@zetex.com	Telephone: (852) 26100 611 Fax: (852) 24250 494 asia.sales@zetex.com	Telephone (44) 161 622 4444 Fax: (44) 161 622 4446 hq@zetex.com

These offices are supported by agents and distributors in major countries world-wide.

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

For the latest product information, log on to www.zetex.com



ISSUE 3 - MARCH 2005