

Extremely Improved Solar Blind Photocathode for Aerospace and General Photometric Applications, 25 mm (1 Inch) Diameter, Ruggedized Low Profile Tube, Cs-Te Photocathode, 10-Stage, Head-on

FEATURES

- High Quantum Efficiency 14 % at 254 nm Typ.
- Ruggedized, Low Profile Structure 300 m/s² vibration
43 mm in bulb length



SPECIFICATIONS

GENERAL

Parameter		Description / Value	Unit
Spectral Response		160 to 320	nm
Wavelength of Maximum Response		240	nm
Photocathode	Material	Cs-Te	—
	Minimum Effective Area	φ21	mm
Window Material		Fused silica	—
Dynode	Structure	Circular cage	—
	Number of Stages	10	—
Base (temporary)		12-pin base JEDEC No. B12-13	—
Operating Ambient Temperature		-40 to +80	°C
Storage Temperature		-40 to +80	°C
Suitable Socket		E678-12A (supplied)	—

MAXIMUM RATINGS (Absolute Maximum Values)

Parameter		Value	Unit
Supply Voltage	Between Anode and Cathode	2000	V
	Between Anode and Last Dynode	300	V
Average Anode Current		0.015	mA

CHARACTERISTICS (at 25°C)

Parameter		Min.	Typ.	Max.	Unit
Cathode Sensitivity	Radiant at 254 nm	20	29	—	mA/W
	Radiant at 365 nm	—	3.4×10^{-3}	1.2×10^{-2}	mA/W
	Radiant at 550 nm	—	3.8×10^{-5}	—	mA/W
	Quantum Efficiency at 254 nm	9.8	14.2	—	%
Anode Sensitivity	Radiant at 254 nm	2.0×10^3	1.5×10^4	—	A/W
Gain		1.0×10^5	5.0×10^5	—	—
Anode Dark Current (after 30 min storage in darkness)		—	15	100	pA
Dark Counts	PHD at 1×10^6 Gain [Ⓐ]	—	10	20	s ⁻¹
	Plateau at V ₀ [Ⓑ]	—	20	—	s ⁻¹
Anode Pulse Rise Time [Ⓒ]		—	1.5	—	ns

NOTE: Ⓐ The discrimination level is set at one fourth the average electron pulse height to measure the background.

Ⓑ Plateau voltage (V₀) at the test up in HPK.

Ⓒ The rise time is the time of the output pulse to rise from 10 % to 90 % of peak amplitude when the entire photocathode is illuminated by a delta function light pulse.

VOLTAGE DISTRIBUTION RATIO AND SUPPLY VOLTAGE

Electrodes	K	Dy1	Dy2	Dy3	Dy4	Dy5	Dy6	Dy7	Dy8	Dy9	Dy10	P
Ratio	2	1	1	1	1	1	1	1	1	1	1	1

Supply Voltage: 1500 V, K: Cathode, Dy: Dynode, P: Anode

PHOTOMULTIPLIER TUBE R2078

Figure 1: Typical Spectral Response

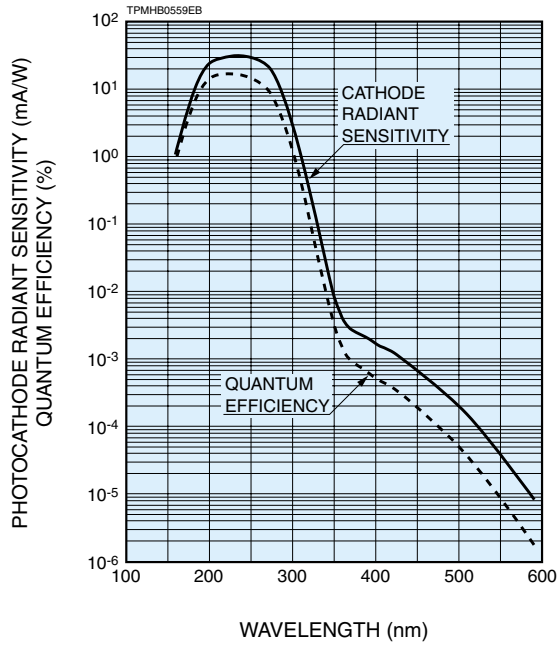


Figure 2: Typical Gain Characteristics


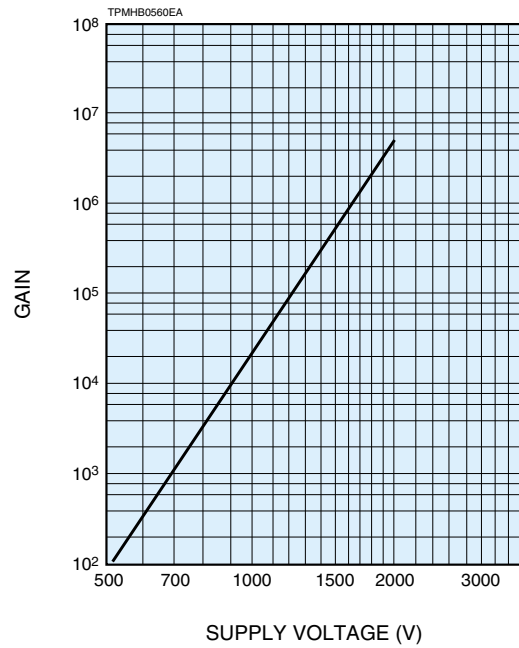


Figure 3: Dimensional Outline and Basing Diagram (Unit: mm)

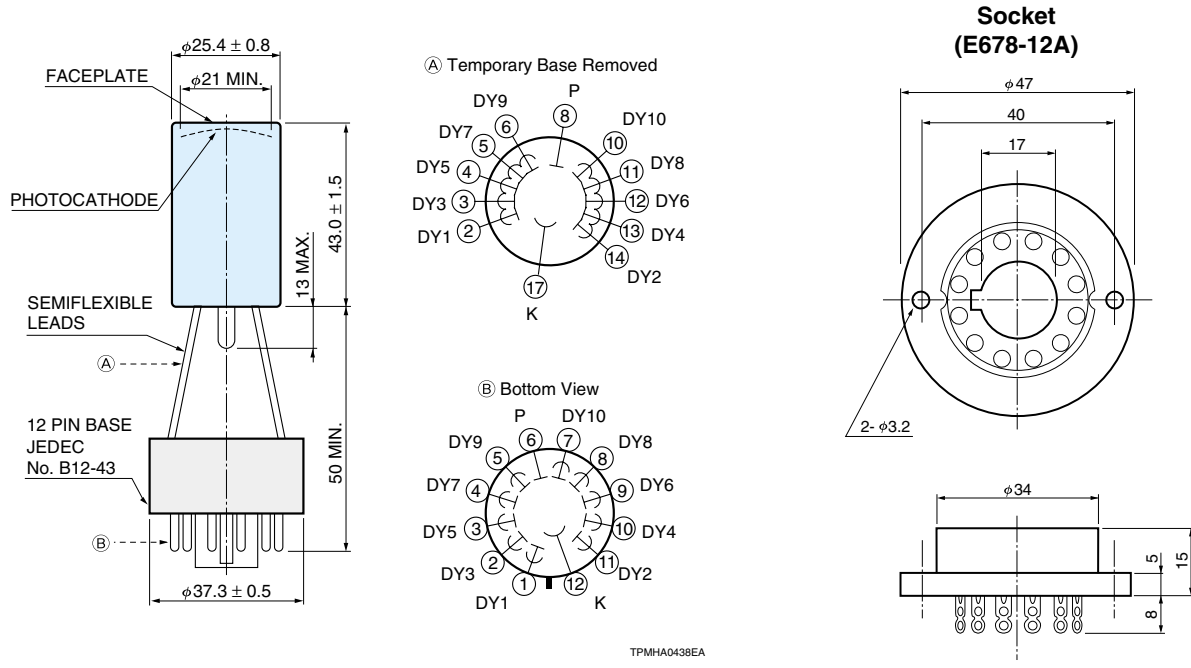

HAMAMATSU

WEB SITE www.hamamatsu.com

HAMAMATSU PHOTONICS K.K., Electron Tube Division

314-5, Shimokanzo, Iwata City, Shizuoka Pref., 438-0193, Japan, Telephone: (81)539/62-5248, Fax: (81)539/62-2205

U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P. O. Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1)908-231-0960, Fax: (1)908-231-1218 E-mail: usa@hamamatsu.com

Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49)8152-375-0, Fax: (49)8152-2658 E-mail: info@hamamatsu.de

France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: (33)1 69 53 71 00, Fax: (33)1 69 53 71 10 E-mail: infos@hamamatsu.fr

United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road Welwyn Garden City Hertfordshire AL7 1BW, United Kingdom, Telephone: 44-(0)1707-294888, Fax: 44(0)1707-325777 E-mail: info@hamamatsu.co.uk

North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171-41 SOLNA, Sweden, Telephone: (46)8-509-031-00, Fax: (46)8-509-031-01 E-mail: info@hamamatsu.se

Italy: Hamamatsu Photonics Italia: S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39)02-935 81 733, Fax: (39)02-935 81 741 E-mail: info@hamamatsu.it

TPMH1226E02
MAR. 2007. IP