





## Thermoelectric Cooler XLT2386

### Performance Values

Hot Side Temperature (°C)	27°C	50°C
Δ Tmax (°C-dry N <sub>2</sub> ):	56.5	64.0
Qmax (watts):	72	79
I <sub>max</sub> (amps):	13.9	13.8
V <sub>max</sub> (vdc):	8.0	8.8
AC Resistance (ohms):	0.47	---

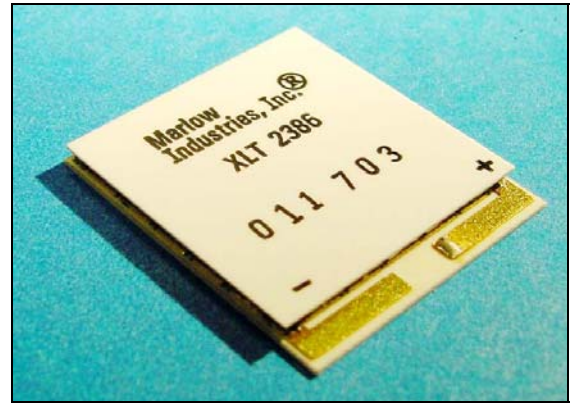

### Mechanical Characteristics

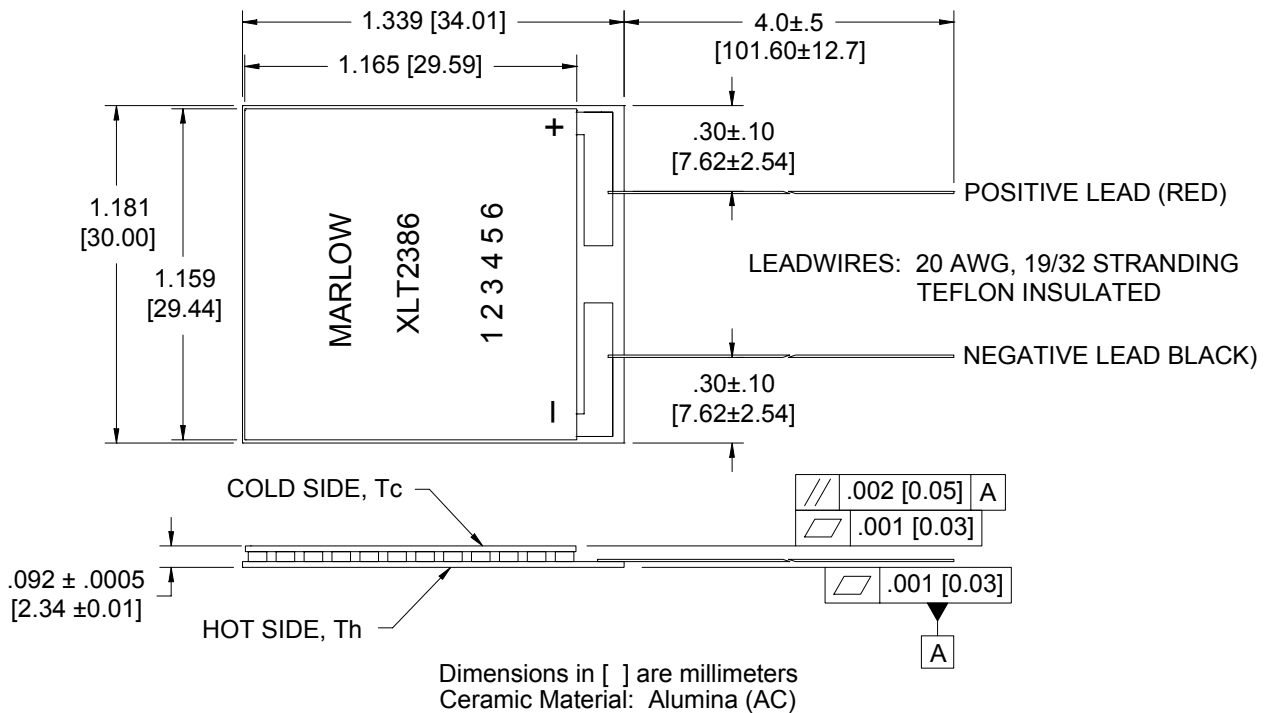

### Ordering Options

Model Number	Description
XLT2386-03AC	No metallized exterior, with Leadwires
XLT2386-04AC	No metallized exterior, without Leadwires
XLT2386-05AC	No metallized exterior, Leadwires, Diced
XLT2386-07AC	No metallized exterior, Leadwires, Sealed
XLT2386-11AC	No markings on hot or cold side

### Features


- Specifically designed for thermal cycling applications
- Capable of rapid heating and cooling rates
- Proven High Reliability (Data available upon request)
- Rugged construction
- Porched configuration for enhanced leadwire strength
- Leadwires attached with 183°C solder
- Rated operating temperature of 150°C
- Height tolerance of ± 0.0005 in. (± 0.01 mm) allows for multiple module applications




**Performance Curves**

Environment: One atmosphere dry nitrogen

Hot Side Temperature: 27°C  
TA(C) = 27

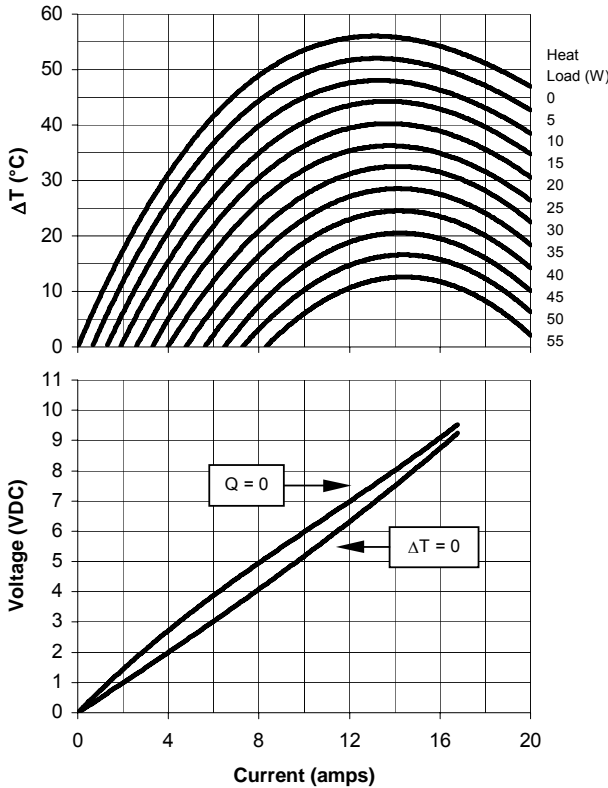

Hot Side Temperature 50°C  
TA(C) = 50

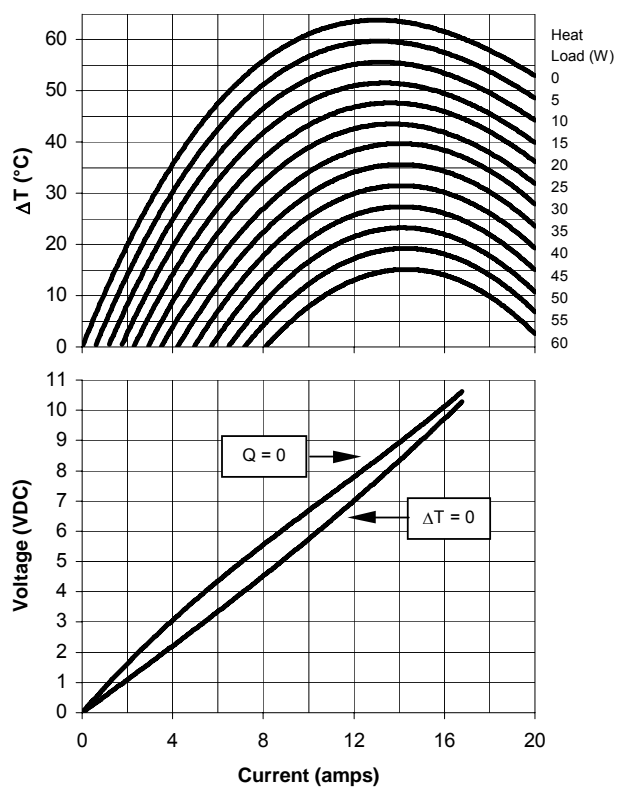

For performance information in a vacuum or with hot side temperatures other than 27°C or 50°C, consult one of our Applications Engineers.

**Installation**

XLT coolers are typically mounted under compression using thermal grease or flexible graphite products. Consult Marlow Industries' Thermoelectric Installation Guide for more details. For additional information, please contact one of our application engineers for technical support.

**Addresses**

**Marlow Industries, Inc.**  
10451 Vista Park Road  
Dallas Texas 75238-1645  
214-340-4900 (tel)  
214-341-5212 (fax)  
[www.marlow.com](http://www.marlow.com)

**Marlow Industries Europe**  
Aberdeen House, South Road  
Haywards Heath  
West Sussex RH164NG UK  
+44 (0)1444-443404 (tel)  
+44 (0)1444-443334(fax)

**Marlow Industries Japan**  
1-1-8-401  
Uehara, Shibuya-ku  
Tokyo, Japan 151-0064  
+81 (3) 5454-5280 (tel)  
+81 (3) 5454-5281(fax)