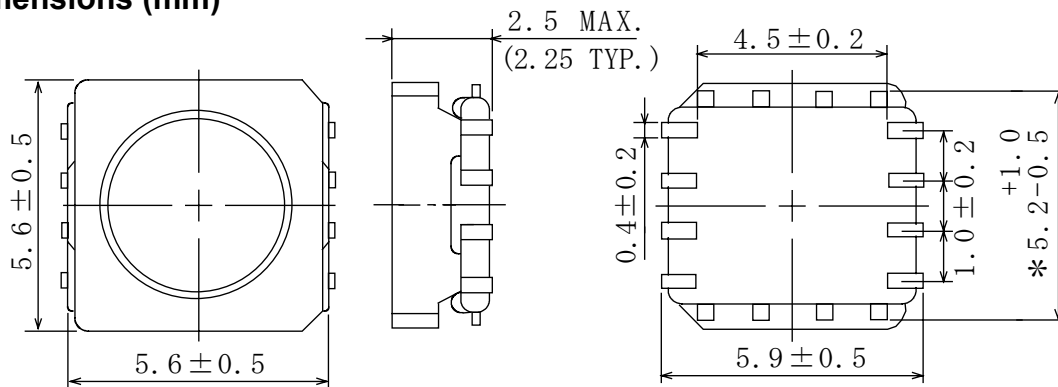



Type: CLQ52
◆ Product Description


- 6.1×6.1mm Max.(L×W), 2.5mm Max.(Height)
- In addition to the typical versions of parameters shown here, custom designs are available to meet your exact requirements


◆ Feature

- Magnetically shielded construction.
- Max. Operating frequency 1MHz, Max Operating power 930mW (1MHz)
- Ideally used in Digital still camera, Digital video camera, LCD TV, Portable equipment.
- RoHs Compliance

◆ Dimensions (mm)

◆ Schematics (Bottom)

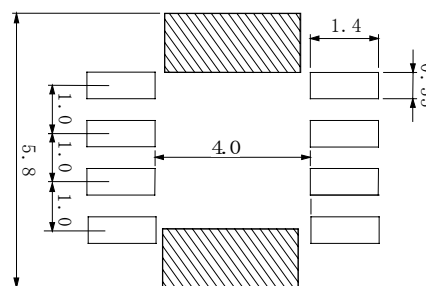
“ S ” indicates winding start.

◆ Land Pattern (mm)

◆ Specification

Sample No.	Inductance (1-4) (1kHz/1V)	D.C.R. (1-4)	Rated current (1-4)
5388-T248	22 μ H \pm 25% within	875m Ω Max.	0.32A