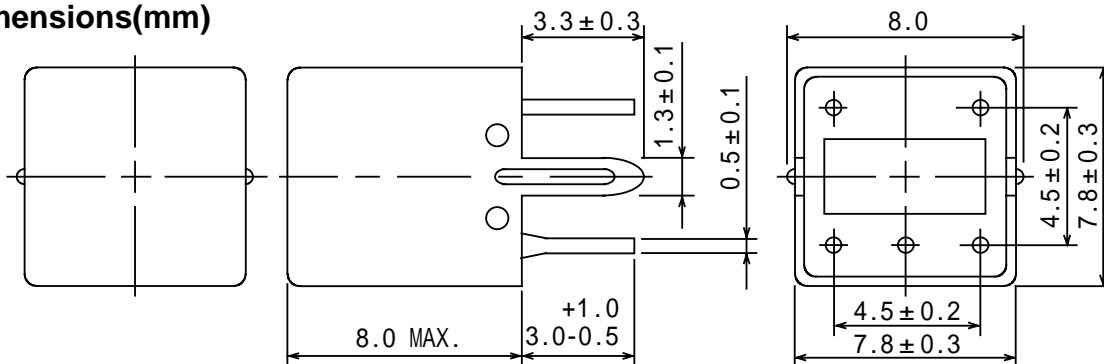


**Type: P-7LCM**
**Product Description**


- 8.1 × 8.1mm Max.(L × W), 8.0mm Max. Height.
- Inductance:1~680 μ H Max.
- Operating frequency:20MHz Max.
- In addition to the reference versions of parameters shown here, custom designs are available to meet your exact requirements.


**Feature**

- Shielded fixed types.
- Ideally used in Radio ,TV. Transceiver
- RoHS Compliance

**Dimensions(mm)**


- \* Dimension does not include solder used on coil.
- \* Pin pitch shall be measured at the root of terminal.
- \* Dimension without tolerance are approx.

**Connection (Bottom View)**


“S” is winding start

**Specification (Part No. F09G-0010A)**

Item	(1-3)	Measuring Condition
Inductance	95 μ H ± 10% Within	796kHz
Unloaded Qu	65 ± 20% Within	796kHz