

MINIATURE RECTIFIERS

REVERSE VOLTAGE - **200 to 800**Volts
 FORWARD CURRENT - **1.0** Amperes


FEATURES

- Low cost
- Diffused junction
- Ultra fast switching for high efficiency
- Low reverse leakage current
- Low forward voltage drop
- High current capability
- The plastic material carries UL recognition 94V-0

MECHANICAL DATA

- Case: JEDEC DO-41 molded plastic
- Polarity: Color band denotes cathode
- Weight : 0.012 ounces, 0.34 grams
- Mounting position: Any

DO- 41

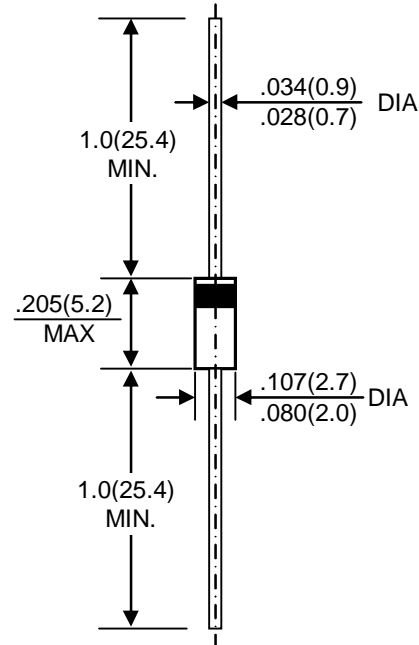

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%

CHARACTERISTICS	SYMBOL	BY134	BY135	UNIT
Maximum Non-Recurrent Peak Reverse Voltage	V _{RRM}	800	200	V
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	600	200	V
Maximum RMS Voltage	V _{RMS}	420	140	V
Maximum DC Blocking Voltage at T _A =150°C	V _{DC}	600	200	V
Maximum Average Forward Rectified Current 375" (9.5mm) Lead Lengths at @T _A =75°C	I _(AV)	1.0		A
Peak Forward Surge Current 10ms Single Half Sine-Wave Super Imposed on Rated Load @ T _A =25°C	I _{FSM}	30		A
Maximum Instantaneous Forward Voltage at 1.0A @ T _A =25°C	V _F	1.1		V
Maximum DC Reverse Current @T _A =25°C at Rated DC Blocking Voltage @T _A =150°C	I _R	5.0	500	µA
Typical junction Capacitance (Note1)	C _J	15.0		pF
Typical Thermal Resistance (Note 2)	R _{θJA}	25.0		°C/W
Operating Temperature Range	T _J	-55 to+150		°C
Storage Temperature Range	T _{STG}	-55 to+150		°C

NOTE:1.Measured at 1.0 MHz and applied reverse voltage of 4.0V DC.

2.Thermal Resistance from Junction of ambient at.375" (9.5mm) lead lengths. P.C.board mounted.

FIG. 1 – FORWARD CURRENT DERATING CURVE

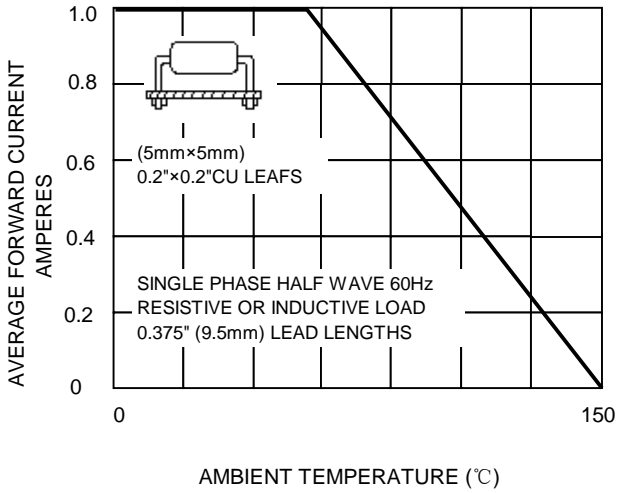


FIG. 2-TYPICAL FORWARD CHARACTERISTICS

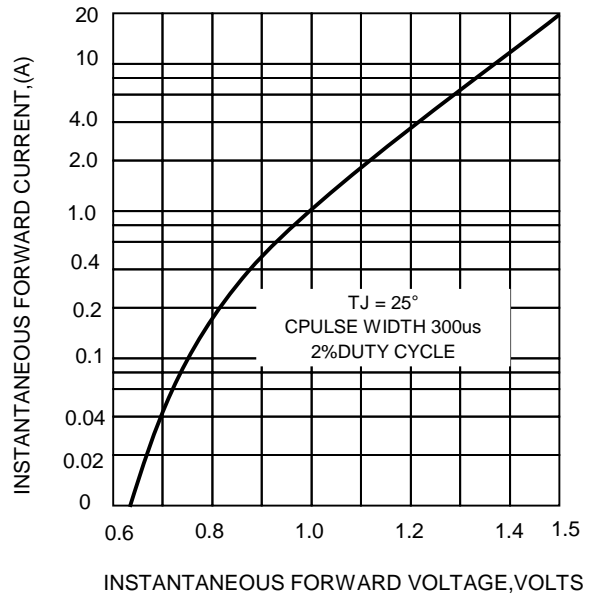


FIG. 3 – MAXIMUM NON-REPETITIVE SURGE CURRENT

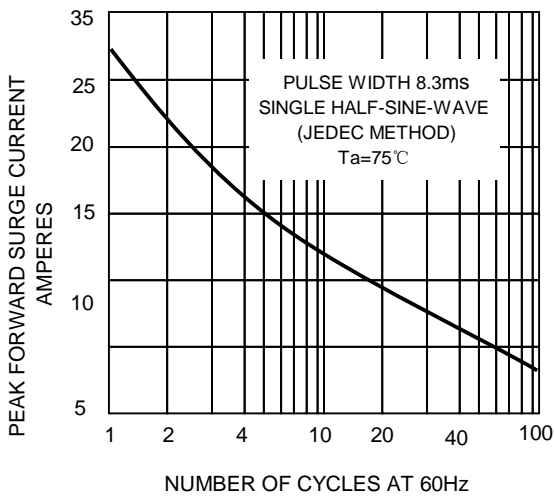


FIG. 4 – PEAK FORWARD SURGE CURRENT AMPERES

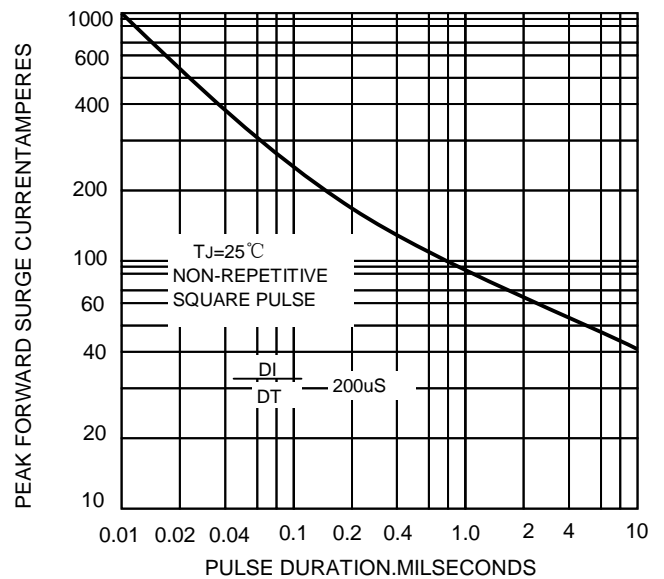


FIG. 5 – TYPICAL JUNCTION CAPACITANCE

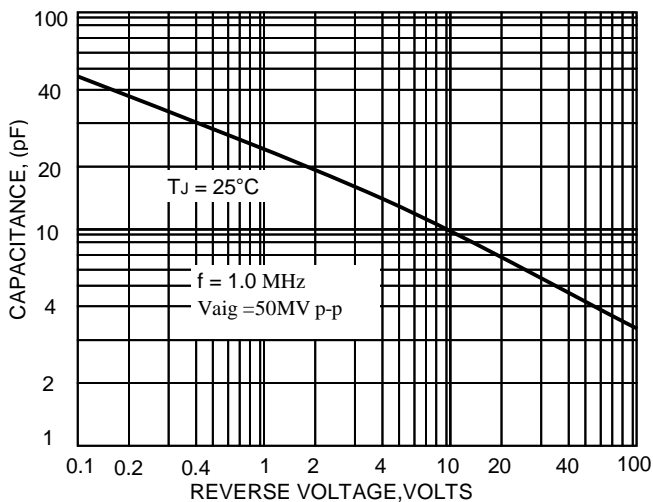


FIG. 6-TYPICAL REVERSE CHARACTERISTICS

