


EB52F4 Series

- Temperature Compensated Crystal Oscillator (TCXO)
- HCMOS Output
- 3.3V Supply Voltage
- Stability to 1.5ppm
- External voltage control option available

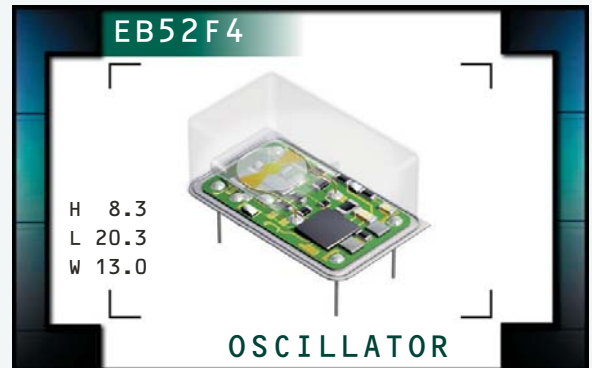

NOTES

ELECTRICAL SPECIFICATIONS

Frequency Range		1.544MHz to 44.736MHz
Operating Temperature Range		See Table 1
Storage Temperature Range		-55°C to 125°C
Supply Voltage (V_{DD})		3.3V _{DC} ±5%
Input Current	Measured at Steady State at 25°C, at Nominal V_{DD} , at Nominal V_C	15mA Maximum ≤ 20.000MHz 25mA Maximum > 20.000MHz
Frequency Stability	vs. Initial Frequency Tolerance	±2.5ppm (at Nominal V_{DD} and V_C , at 25°C)
	vs. Operating Temperature Range	See Table 1 (at Nominal V_{DD} and V_C)
	vs. Input Voltage (V_{DD} ±5%)	±0.3ppm Maximum
	vs. Load (±10%)	±0.2ppm Maximum
Aging (at 25°C)		±1ppm / year Maximum
Output Voltage Logic High (V_{OH})		90% of V_{DD} Minimum
Output Voltage Logic Low (V_{OL})		10% of V_{DD} Maximum
Rise Time / Fall Time	20% to 80% of Waveform	6 nSeconds Maximum
Duty Cycle	at 50% of Waveform	50 ±5(%)
Load Drive Capability		15pF HCMOS Load Maximum
Control Voltage Range		0.0V _{DC} to V_{DD}
Control Voltage (External)	Positive Transfer Characteristic	1.65V _{DC} ±1.35V _{DC}
Frequency Deviation	Referenced to F_0 at $V_C = 1.65V_{DC}$, $V_{DD} = 3.3V_{DC}$	±7ppm Minimum, ±20ppm Maximum
Linearity		±10% Maximum
Input Impedance		10kOhms Typical
Phase Noise (at 19.440MHz)	Measured at 25°C, at Nominal V_{DD} , at Nominal V_C	
	at 10Hz Offset	-70dBc/Hz Typical
	at 100Hz Offset	-100dBc/Hz Typical
	at 1kHz Offset	-130dBc/Hz Typical
	at 10kHz Offset	-140dBc/Hz Typical
	at 100kHz Offset	-145dBc/Hz Typical

MANUFACTURER ECLIPTEK CORP.	CATEGORY OSCILLATOR	SERIES EB52F4	PACKAGE 14-PIN DIP	VOLTAGE 3.3V	CLASS OS2X	REV. DATE 06/04
--------------------------------	------------------------	------------------	-----------------------	-----------------	---------------	--------------------

EB52F4 D 15 A V - 12.800M - G

INITIAL TOLERANCE
D=±2.5ppm Maximum

FREQUENCY STABILITY
Two Digit Code Per Table 1

OPERATING TEMP. RANGE
One Letter Code Per Table 1

AVAILABLE OPTIONS

Blank=None (Standard)
CB=Cut Leads to 2.540 ±0.500 (0.100" ±0.020")
CC=Cut Leads to 3.175 ±0.500 (0.125" ±0.020")
CD=Cut Leads to 3.810 ±0.500 (0.150" ±0.020")
CE=Cut Leads to 4.445 ±0.500 (0.175" ±0.020")
G=Full Size Gull Wing

FREQUENCY

EXTERNAL TRIM


N=None (No Connection on Pin 1)
V=Voltage Control on Pin 1

TABLE 1: PART NUMBERING CODES

Operating Temperature Range	Code	Frequency Stability			
		X = Available from 1.544MHz to 32.768MHz Y = Available at any Frequency			
		±1.5ppm	±2.0ppm	±3.0ppm	±5.0ppm
0°C to +50°C	A	Y	Y	Y	Y
0°C to 70°C	B	X	Y	Y	Y
-20°C to +70°C	C		X	Y	Y
-30°C to +75°C	D			Y	Y
-40°C to +85°C	E			X	Y

MECHANICAL DIMENSIONS

ALL DIMENSIONS IN MILLIMETERS

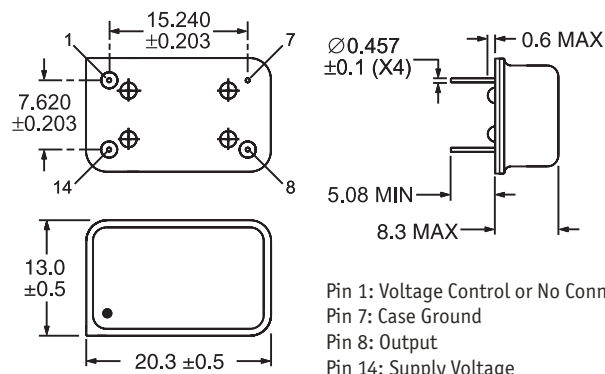

MARKING SPECIFICATIONS

Line 1: ECLIPTEK

Line 2: XX.XXX M

M=MHz

Frequency (5 Digits Maximum + Decimal)

Line 3: XX Y ZZ

Week of Year

Last Digit of Year

Ecliptek Manufacturing Identifier

Note: Pin 1 shall be designated with a dot

ENVIRONMENTAL/MECHANICAL SPECIFICATIONS

Characteristic

Fine Leak Test
 Gross Leak Test
 Mechanical Shock
 Vibration
 Lead Integrity
 Solderability
 Temperature Cycling
 Resistance to Soldering Heat
 Resistance to Solvents

Specification

MIL-STD-883, Method 1014, Condition A
 MIL-STD-883, Method 1014, Condition C
 MIL-STD-202, Method 213, Condition C
 MIL-STD-883, Method 2007, Condition A
 MIL-STD-883, Method 2004
 MIL-STD-883, Method 2002
 MIL-STD-883, Method 1010
 MIL-STD-883, Method 210
 MIL-STD-883, Method 215

MANUFACTURER
ECLIPTEK CORP.

CATEGORY
OSCILLATOR

SERIES
EB52F4

PACKAGE
14 pin DIP

VOLTAGE
3.3V

CLASS
OS2X

REV. DATE
06/04