

2A Glass Passivated Bridge Rectifier

Features

- Glass passivated chip junction
- High case dielectric strength
- Typical I_r less than $0.5\mu A$
- High surge current capability
- Ideal for printed circuit boards
- High temperature soldering guaranteed: $260^\circ C/10$ seconds
0.375" (9.5mm) lead length at 5lbs.(2.3kg) tension
- This series is UL recognized under component index,
File number E194718
- RoHS compliant



WOG



Mechanical Data

Case:	WOG, Epoxy meets UL 94V-0 flammability rating
Terminals:	Plated leads solderable per MIL-STD-750, Method 2026
Polarity:	As marked on case
Weight:	0.04 ounce, 1.1 grams

Maximum Ratings And Electrical Characteristics ($T_{amb}=25^\circ C$)

Symbols	Parameter	2W 005G	2W 01G	2W 02G	2W 04G	2W 06G	2W 08G	2W 10G	Unit	Conditions
V_{RRM}	Maximum Repetitive Peak Reverse Voltage	50	100	200	400	600	800	1000	V	
V_{RMS}	Maximum RMS Voltage	35	70	140	280	420	560	700	V	
V_{DC}	Maximum DC Blocking Voltage	50	100	200	400	600	800	1000	V	
I_(AV)	Maximum Average Forward Rectified Current at 0.375" (9.5mm) lead length	2.0							A	
I_{FSM}	Peak Forward Surge Current	60							A	8.3ms Single Sine-wave Superimposed on Rated Load (JEDEC Method)
I_t	Rating for Fusing (t<8.3ms)	15							A ² sec	

2A Glass Passivated Bridge Rectifier

2W005G - 2W10G

Symbols	Parameter	2W 005G	2W 01G	2W 02G	2W 04G	2W 06G	2W 08G	2W 10G	Unit	Conditions
V_F	Maximum Instantaneous Forward Voltage Drop per leg	1.1							V	I _F =2.0A
I_R	Maximum DC Reverse Current at Rated DC Blocking Voltage per leg	5.0							μA	TA=25°C
		500								TA=125°C
C_J	Typical Junction Capacitance per leg	40			20				pF	V _R =4V, f=1MHz
R_{θJA}	Typical Thermal Resistance per leg	40							°C/W	Note 1
R_{θJL}		15								
T_J, T_{STG}	Operating Junction and Storage Temperature Range	-55 to 150							°C	

Note: 1. Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length P.C.B. mounting.

Rating and Characteristic Curves

Fig.1- Derating Curve Output Rectified Current


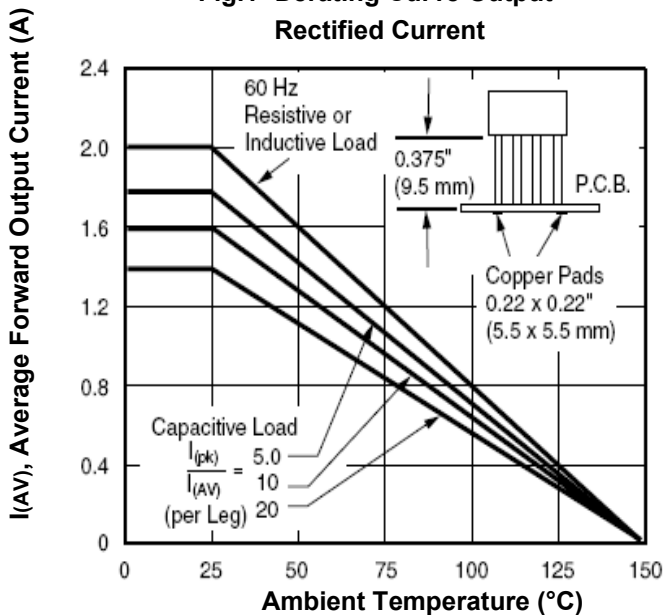


Fig.2-Maximum Non-Repetitive Peak Forward Surge Current per leg

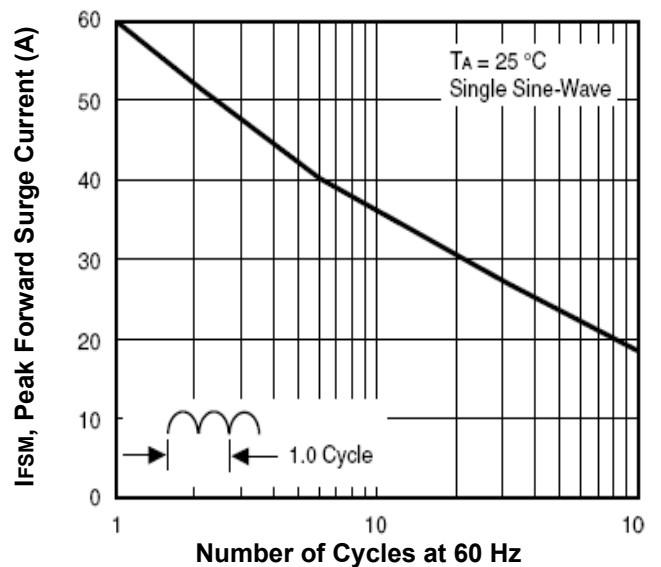

2A Glass Passivated Bridge Rectifier

2W005G - 2W10G

Fig.3-Typical Forward Characteristics per leg

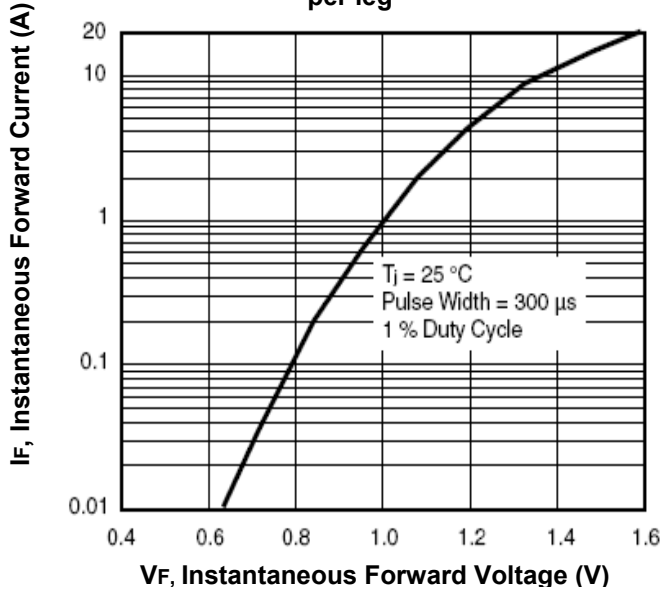


Fig.4-Typical Reverse Leakage Characteristics per leg


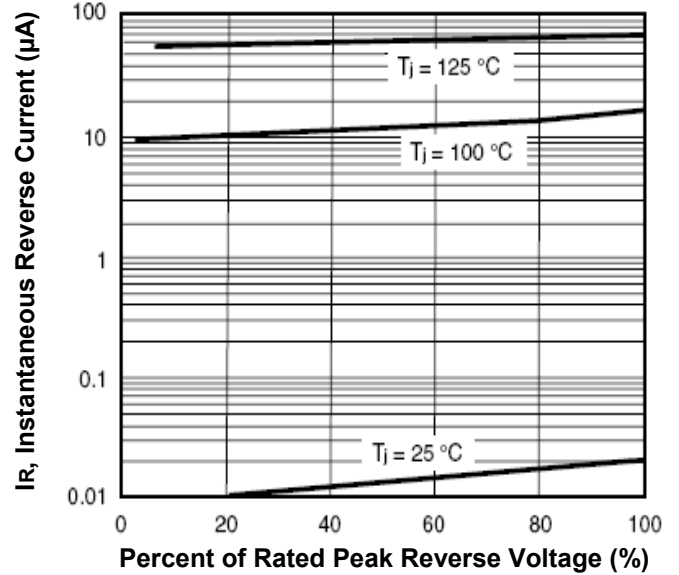



Fig.5-Typical Junction Capacitance per leg

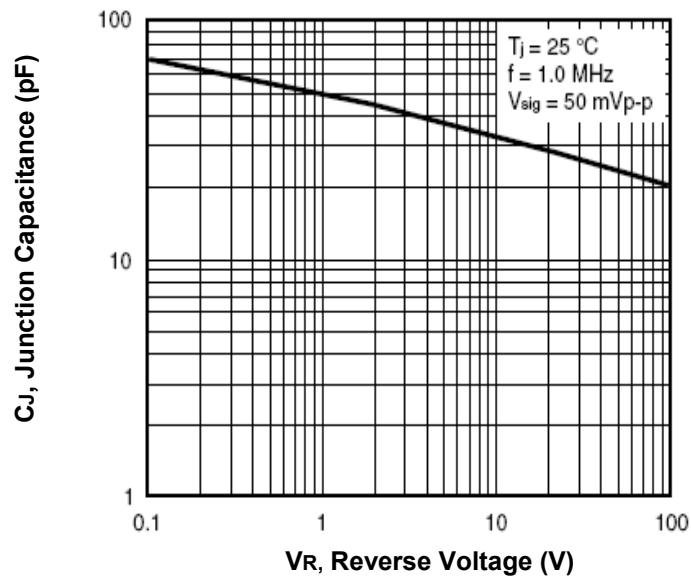

2A Glass Passivated Bridge Rectifier

2W005G - 2W10G

Dimensions in inch (mm)

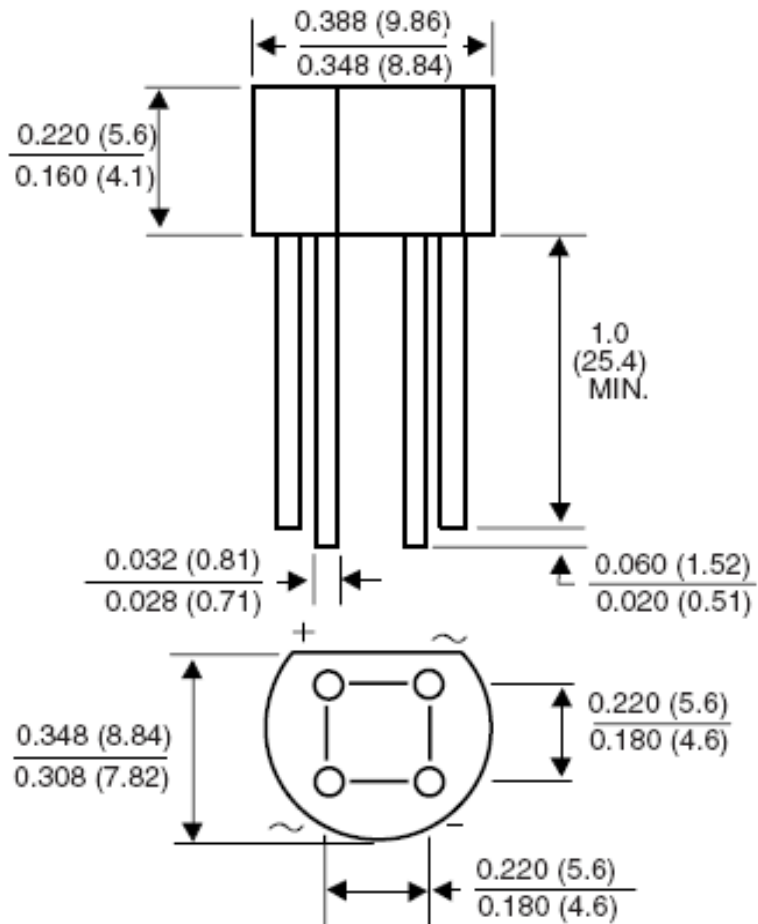

Case Style WOG

2A Glass Passivated Bridge Rectifier

2W005G - 2W10G

How to contact us

US HEADQUARTERS

28040 WEST HARRISON PARKWAY, VALENCIA, CA 91355-4162

Tel: (800) TAITRON (800) 247-2232 (661) 257-6060

Fax: (800) TAITFAX (800) 824-8329 (661) 257-6415

Email: taitron@taitroncomponents.com

Http://www.taitroncomponents.com

TAITRON COMPONENTS MEXICO, S.A .DE C.V.

BOULEVARD CENTRAL 5000 INTERIOR 5 PARQUE INDUSTRIAL ATITALAQUIA, HIDALGO C.P.

42970 MEXICO

Tel: +52-55-5560-1519

Fax: +52-55-5560-2190

TAITRON COMPONENTS INCORPORATED REPRESENTAÇÕES DO BRASIL LTDA

RUA DOMINGOS DE MORAIS, 2777, 2.ANDAR, SALA 24 SAÚDE - SÃO PAULO-SP 04035-001 BRAZIL

Tel: +55-11-5574-7949

Fax: +55-11-5572-0052

TAITRON COMPONENTS INCORPORATED, SHANGHAI REPRESENTATIVE OFFICE

METROBANK PLAZA, 1160 WEST YAN' AN ROAD, SUITE 1503, SHANGHAI, 200052, CHINA

Tel: +86-21-5424-9942

Fax: +86-21-5424-9931