



### APPLICATIONS

- INDUSTRIAL PROCESS CONTROL
- DC MOTOR DRIVE
- INTRINSIC SAFETY SYSTEMS
- GROUND LOOP ELIMINATION
- MEDICAL EQUIPMENT
- PORTABLE TEST EQUIPMENT
- DATA ACQUISITION

### FEATURES

- ROHS COMPLIANT
- HIGH ISOLATION
- 2500VRMS ISOLATION TEST VOLTAGE
- BARRIER 100% PRODUCTION TESTED
- LOW BARRIER CAPACITANCE - 10PF
- LOW LEAKAGE CURRENT - 2 $\mu$ A MAX
- 24-PIN SMD
- INTERNAL FILTERING
- NON-CONDUCTIVE CASE
- LOW COST
- LOW PROFILE - .375"

### DESCRIPTION

The HB01UZC Series offers a wide selection of input and output voltages to choose from. Each model is offered in a 24-pin SMD package and has an input to output isolation rating of 2500Vrms making it ideal for applications requiring high isolation. The dielectric withstand characteristics of each converter are measured in production to ensure barrier integrity.

The HB01UZC Series is ideal for applications where the output is susceptible to high voltage transients, such as motor drive and industrial process control applications. The low barrier capacitance gives excellent input to output dV/dt characteristics thus protecting the input control circuitry from peak transients appearing on the output.

The HB01UZC Series uses a self-oscillating circuit design technology to realize low cost and high performance. The inherent current limiting capability of the high isolation design reduces high current stresses during start-up thus increasing the capacitive load capability while maintaining high reliability.

As with all of our DC/DC converters, surface mount construction combined with extensive qualification testing assures low cost without sacrificing quality and reliability.



For full details go to  
[www.murata-ps.com/rohs](http://www.murata-ps.com/rohs)

### ELECTRICAL SPECIFICATIONS

Specifications typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

| MODEL         | NOMINAL INPUT VOLTAGE (Vdc) | RATED OUTPUT VOLTAGE (Vdc) | RATED OUTPUT CURRENT (mA) | INPUT CURRENT |                 | EFFICIENCY (%) |
|---------------|-----------------------------|----------------------------|---------------------------|---------------|-----------------|----------------|
|               |                             |                            |                           | MIN LOAD (mA) | RATED LOAD (mA) |                |
| HB01U05S05ZC  | 5                           | 5                          | 200                       | 63            | 290             | 68             |
| HB01U05S12ZC  | 5                           | 12                         | 83                        | 63            | 290             | 70             |
| HB01U05S15ZC  | 5                           | 15                         | 67                        | 63            | 290             | 73             |
| HB01U12S05ZC  | 12                          | 5                          | 200                       | 20            | 120             | 68             |
| HB01U12S12ZC  | 12                          | 12                         | 83                        | 20            | 120             | 70             |
| HB01U12S15ZC  | 12                          | 15                         | 67                        | 20            | 114             | 73             |
| HB01U15S05ZC  | 15                          | 5                          | 200                       | 25            | 98              | 68             |
| HB01U15S12ZC  | 15                          | 12                         | 83                        | 25            | 95              | 70             |
| HB01U15S15ZC  | 15                          | 15                         | 67                        | 25            | 90              | 73             |
| HB01U24S05ZC  | 24                          | 5                          | 200                       | 13            | 61              | 68             |
| HB01U24S12ZC  | 24                          | 12                         | 83                        | 13            | 60              | 70             |
| HB01U24S15ZC  | 24                          | 15                         | 67                        | 13            | 57              | 73             |
| HB01U05D05ZC  | 5                           | $\pm 5$                    | $\pm 100$                 | 63            | 290             | 68             |
| HB01U05D12ZC  | 5                           | $\pm 12$                   | $\pm 42$                  | 63            | 285             | 70             |
| HB01U05D15ZC* | 5                           | $\pm 15$                   | $\pm 34$                  | 63            | 275             | 73             |
| HB01U12D05ZC  | 12                          | $\pm 5$                    | $\pm 100$                 | 20            | 123             | 68             |
| HB01U12D12ZC  | 12                          | $\pm 12$                   | $\pm 42$                  | 20            | 118             | 70             |
| HB01U12D15ZC  | 12                          | $\pm 15$                   | $\pm 34$                  | 20            | 114             | 73             |
| HB01U15D05ZC  | 15                          | $\pm 5$                    | $\pm 100$                 | 25            | 98              | 68             |
| HB01U15D12ZC  | 15                          | $\pm 12$                   | $\pm 42$                  | 25            | 95              | 70             |
| HB01U15D15ZC  | 15                          | $\pm 15$                   | $\pm 34$                  | 25            | 90              | 73             |
| HB01U24D05ZC  | 24                          | $\pm 5$                    | $\pm 100$                 | 13            | 61              | 68             |
| HB01U24D12ZC  | 24                          | $\pm 12$                   | $\pm 42$                  | 13            | 60              | 70             |
| HB01U24D15ZC  | 24                          | $\pm 15$                   | $\pm 34$                  | 13            | 57              | 73             |

\*Available in tape and reel only (package quantity 1000).

### COMMON SPECIFICATIONS

Specifications typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

| PARAMETER                                      | CONDITIONS   | MIN  | TYP        | MAX     | UNITS          |
|--|--|------|------------|---------|----------------|
| <b>INPUT</b>                                   |  |      |            |         |                |
| Voltage Range                                  |  | 4.5  | 5          | 5.5     | Vdc            |
|  |  | 10.8 | 12         | 13.2    | Vdc            |
|  |  | 13.5 | 15         | 16.5    | Vdc            |
| Reflected Ripple Current                       |  | 20   | 24         | 30      | Vdc<br>mAp-p   |
|  |  |      | 35         |         |                |
| <b>ISOLATION</b>                               |  |      |            |         |                |
| Rated Voltage                                  |  | 3535 |            |         | VDC            |
| Test Voltage                                   | 60 Hz, 10 Seconds                                  | 2500 |            |         | Vrms           |
| Resistance                                     |  |      | 10         |         | GΩ             |
| Capacitance                                    |  |      | 10         |         | pF             |
| Leakage Current                                | $V_{iso} = 240V_{AC}, 60\text{Hz}$                 |      | 1          | 2       | μArms          |
| <b>OUTPUT</b>                                  |  |      |            |         |                |
| Rated Power                                    |  |      | 1          |         | W              |
| Voltage Setpoint Accuracy                      |  |      | $\pm 3$    | $\pm 5$ | %              |
| Temperature Coefficient                        |  |      | $\pm 0.02$ |         | %/°C           |
| Ripple & Noise                                 | BW = DC to 10MHz<br>BW = 10Hz to 2MHz              |      | 50<br>25   |         | mVp-p<br>mVrms |
| Line Regulation                                | High Line to Low Line                              |      | $\pm 1.5$  |         | %/% Vin        |
| Load Regulation                                | See Performance Curves (Min Load = 5%)             |      |            |         |                |
| <b>GENERAL</b>                                 |  |      |            |         |                |
| Switching Frequency                            |  |      | 160        |         | kHz            |
| Package Weight                                 |  |      | 12         |         | g              |
| MTTF per MIL-HDBK-217, Rev. F<br>Ground Benign | Circuit Stress Method<br>$T_A = +25^\circ\text{C}$ |      | 2,000,000  |         | Hr             |
| Moisture Sensitivity Level (MSL)               | Per IPC/JEDEC J-STD-020                            |      | 2          |         |                |
| <b>TEMPERATURE</b>                             |  |      |            |         |                |
| Specification                                  |  | -25  |            | +70     | °C             |
| Operation                                      |  | -40  |            | +85     | °C             |
| Storage  |  | -40  |            | +110    | °C             |

**SMD PACKAGE**

**TOP VIEWS**


**SIDE VIEWS**

**END VIEWS**

NU = Do Not Use.  
 NC = No Internal Connection.  
 Duplicate pin functions are internally connected.  
 All dimensions are in inches (millimeters).  
 GRID: 0.100 inches (2.54 millimeters)  
 Typically Marked with: specific model ordered, date code, job code and logo.  
**MATERIAL:** Units are encapsulated in a low thermal resistance molding compound which has excellent chemical resistance, wide operating temperature range, and good electrical properties under high humidity environments. The encapsulant and outer shell of the unit have UL94V-0 ratings. Lead material is phosphor bronze; lead finish is 100-300 microinches of matte tin over a barrier layer of 5-40 microinches nickel.

| PIN CONNECTIONS |         |        |
|-----------------|---------|--------|
| PIN#            | SINGLES | DUALS  |
| 1               | +VOUT   | +VOUT  |
| 2               | -VOUT   | Common |
| 3               | NU      | -VOUT  |
| 10              | -VIN    | -VIN   |
| 11              | NC      | NC     |
| 12              | +VIN    | +VIN   |
| 13              | +VIN    | +VIN   |
| 14              | NC      | NC     |
| 15              | -VIN    | -VIN   |
| 21              | NC      | NC     |
| 22              | NU      | -VOUT  |
| 23              | -VOUT   | Common |
| 24              | +VOUT   | +VOUT  |

**RECOMMENDED LAND PATTERN**

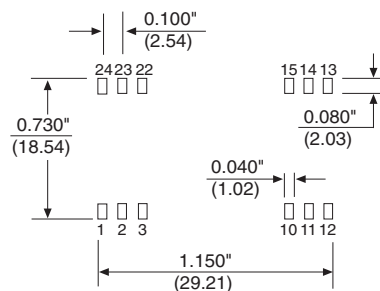


**SMT SOLDERING INFORMATION**

The surface mount versions of the HB01UZC series are designed for SMT reflow soldering. During this standard process devices should be heated at a rate not to exceed 3 degrees C per second. The peak reflow temperature is 260 degrees C. The device should not be exposed to the peak temperature  $\pm 10$  degrees C for more than 12 seconds. The cool down rate for this device should not exceed 3 degrees C per second.

**ABSOLUTE MAXIMUM RATINGS**








Internal Power Dissipation.....0.5 Watt  
 Short Circuit Duration.....5 Min  
 Lead Temperature (soldering, 10 seconds max).....+300°C\*  
 \*Note: Refer to Reflow Profile for SMD Models.

**ORDERING INFORMATION**

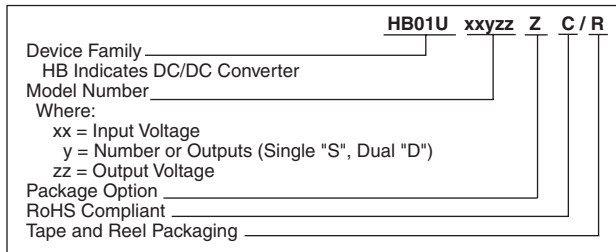

**TYPICAL PERFORMANCE CURVES**

Specifications typical at  $T_A = +25^\circ\text{C}$ , nominal input voltage, rated output current unless otherwise specified.

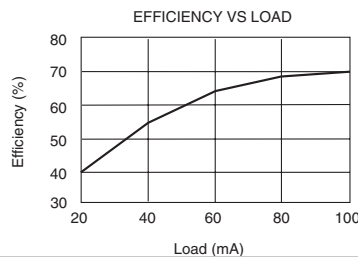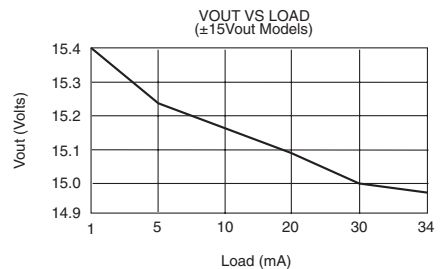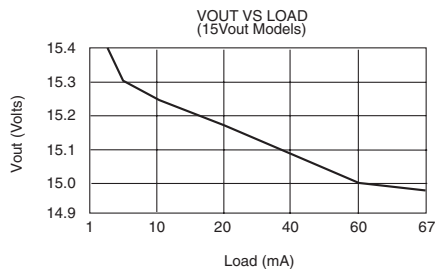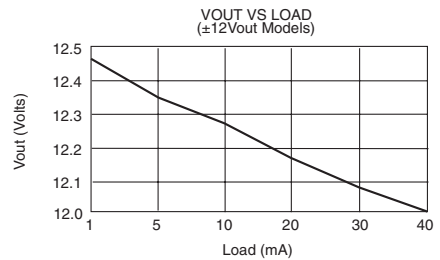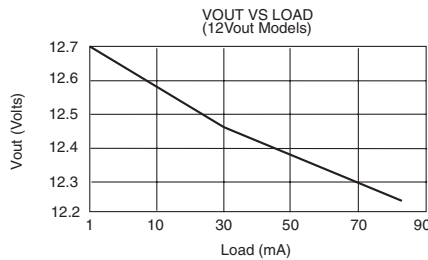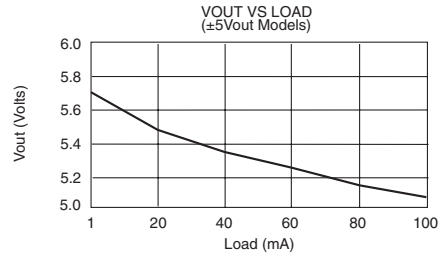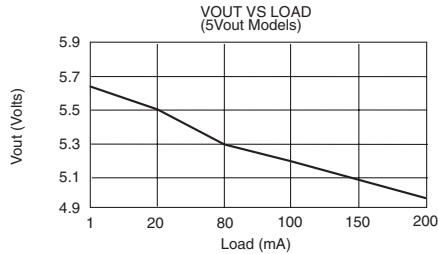

Murata Power Solutions, Inc.  
 11 Cabot Boulevard, Mansfield, MA 02048-1151 U.S.A.  
 Tel: (508) 339-3000 (800) 233-2765 Fax: (508) 339-6356  
 www.murata-ps.com email: sales@murata-ps.com ISO 9001 and 14001 REGISTERED  
 01/19/09

Murata Power Solutions, Inc. makes no representation that the use of its products in the circuits described herein, or the use of other technical information contained herein, will not infringe upon existing or future patent rights. The descriptions contained herein do not imply the granting of licenses to make, use, or sell equipment constructed in accordance therewith. Specifications are subject to change without notice.  
 © 2008 Murata Power Solutions, Inc.

- USA:** Mansfield (MA), Tel: (508) 339-3000, email: sales@murata-ps.com
- Canada:** Toronto, Tel: (866) 740-1232, email: toronto@murata-ps.com
- UK:** Milton Keynes, Tel: +44 (0)1908 615232, email: mk@murata-ps.com
- France:** Montigny Le Bretonneux, Tel: +33 (0)1 34 60 01 01, email: france@murata-ps.com
- Germany:** München, Tel: +49 (0)89-544334-0, email: munich@murata-ps.com
- Japan:** Tokyo, Tel: 3-3779-1031, email: sales\_tokyo@murata-ps.com  
 Osaka, Tel: 6-6354-2025, email: sales\_osaka@murata-ps.com
- China:** Shanghai, Tel: +86 215 027 3678, email: shanghai@murata-ps.com  
 Guangzhou, Tel: +86 208 221 8066, email: guangzhou@murata-ps.com
- Singapore:** Parkway Centre, Tel: +65 6348 9096, email: singapore@murata-ps.com