

**Silicon NPN Power Transistors**

**2SC1672**

**DESCRIPTION**

- With TO-3 package
- High current capability
- Fast switching speed

**APPLICATIONS**

- Motor control
- Linear and switching applications

**PINNING(see fig.2)**

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

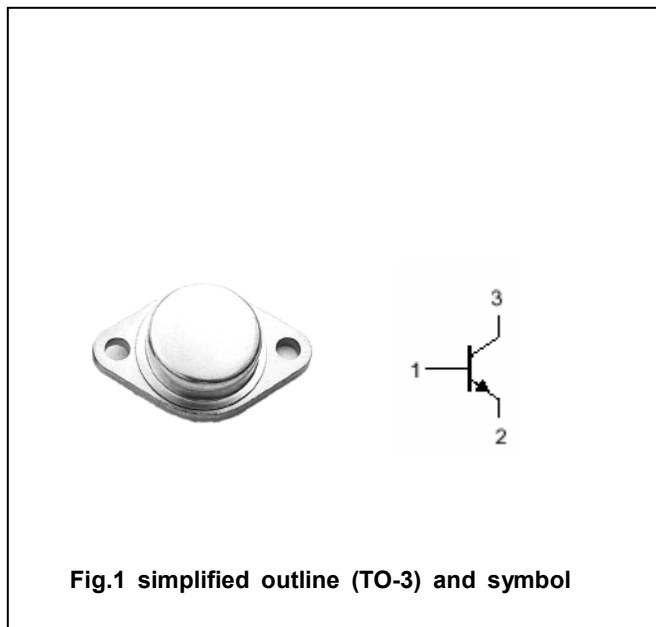


Fig.1 simplified outline (TO-3) and symbol

**ABSOLUTE MAXIMUM RATINGS(Ta=25℃)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	150	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	120	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	6	V
I <sub>C</sub>	Collector current		25	A
I <sub>CM</sub>	Collector current-peak		30	A
P <sub>T</sub>	Total power dissipation	T <sub>C</sub> =25℃	120	W
T <sub>j</sub>	Junction temperature		175	℃
T <sub>stg</sub>	Storage temperature		-55~175	℃

**THERMAL CHARACTERISTICS**

SYMBOL	PARAMETER	MAX	UNIT
R <sub>th j-c</sub>	Thermal resistance junction to case	1.17	℃/W

## Silicon NPN Power Transistors

## 2SC1672

## CHARACTERISTICS

T<sub>j</sub>=25 °C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>CEO(SUS)</sub>	Collector-emitter sustaining voltage	I <sub>C</sub> =0.1A; I <sub>B</sub> =0	120			V
V <sub>(BR)EBO</sub>	Emitter-base breakdown voltage	I <sub>E</sub> =1mA; I <sub>C</sub> =0	6			V
V <sub>CEsat-1</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =10A; I <sub>B</sub> =1A			0.6	V
V <sub>CEsat-2</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =20A; I <sub>B</sub> =2A			1.2	V
V <sub>BEsat</sub>	Base-emitter saturation voltage	I <sub>C</sub> =20A; I <sub>B</sub> =2A			2.0	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =150V; I <sub>E</sub> =0			0.1	mA
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =6V; I <sub>C</sub> =0			0.1	mA
h <sub>FE-1</sub>	DC current gain	I <sub>C</sub> =13A ; V <sub>CE</sub> =2V	20		100	
h <sub>FE-2</sub>	DC current gain	I <sub>C</sub> =20A ; V <sub>CE</sub> =4V	10			

Silicon NPN Power Transistors

2SC1672

PACKAGE OUTLINE

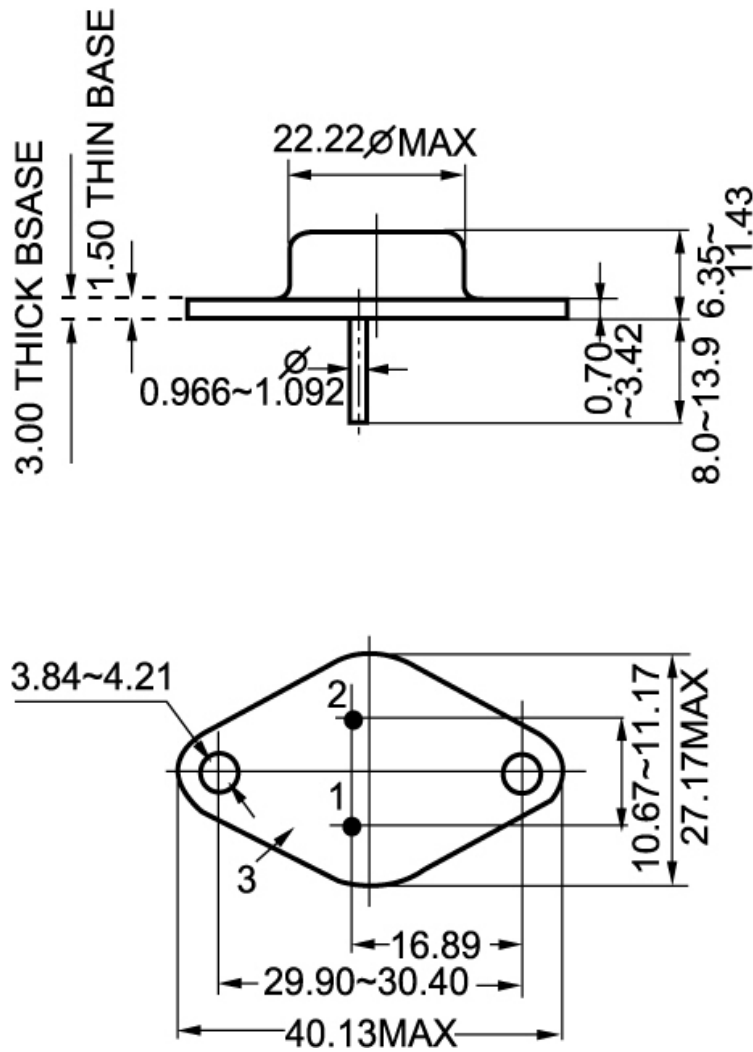


Fig.2 Outline dimensions