


MPA600R Series

Industrial 600W Single Output Power Factor Corrected AC/DC Power Supplies

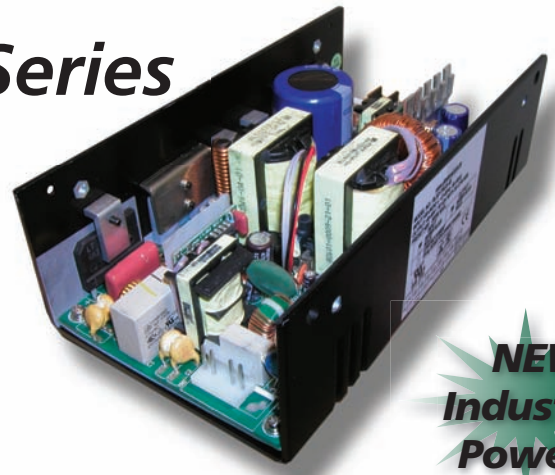

**NEW
Industrial
Power!!**

Key Features:

- 600W Output Power
- Universal 90-264V AC Input
- PFC to EN61000-3-2 "D"
- UL, cUL, TUV Approvals
- CE Certified
- FCC Class B Emissions
- 2 - 56 V Output Voltages
- N+1 Current Share Option
- Three Mechanical Options

Electrical Specifications

Specifications typical @ +25°C, nominal input voltage & rated output current, unless otherwise noted. Specifications subject to change without notice.

Input

Parameter	Conditions	Min.	Typ.	Max.	Units
Input Voltage Range	Universal	90		264	VAC
Input Frequency		47		63	Hz
Input Current, Full Load	90 - 264 VAC		10		A
Inrush Current, Cold Start	110 VAC			17.5	A
	220 VAC			35	
Leakage Current (Note 1)	240 VAC		1.5		mA
Power Factor Correction	Active, Meets EN61000-3-2 Class D				
Input Protection	T10A/250V Fuse				

Output

Parameter	Conditions	Min.	Typ.	Max.	Units
Output Voltage Adjustment	By Trim Pot		±5.0		%
Output Regulation (Note 2)			±1.0		%
Hold Time	80% Load		20		mSec
Ripple & Noise (20 MHz) (Note 3)	See Model Selection Guide				
Overload Protection	Power Limit	110		140	%
Over Voltage Protection	>130% of Rated Output Voltage. Recycle AC Input.				
Over Temperature Protection	>+85°C Ambient with Autorecovery				
Temperature Coefficient			±0.04		%/°C
Transient Recovery Time (Note 4)	50% Load Change		2.5		mS
Transient Response Deviation			5		%
Overshoot/Undershoot	At Turn On/Off			5.0	%
Turn On Delay	120 VAC			1	S
Output Short Circuit	Continuous With Autorecovery				

General

Parameter	Conditions	Min.	Typ.	Max.	Units
Isolation Voltage	Input - Output	3,000			VAC
	Input - FG (Frame Ground)	1,500			
	Primary - Core	1,500			
Switching Frequency	Fixed		23		kHz

Interface Signals

Power Supply On	Green LED (LED1) on the PCB
Power Good Signal	PG on CN3. Goes TTL high 100 to 500 mS after regulation. Goes low at least 1 mS before the loss of regulation. Will sink 100 mA.
Current Sharing	CSH on CN3. Single wired, forced current sharing option. Up to four units may be connected in parallel within 10% accuracy at full load.
Current Monitor	CMN on CN3. A 0.5V to 3.0V output that represents 0% to 100% of the unit output current
Remote Sense	RS + and RS- on CN3. Compensates for up to a 0.5V line drop. (not on models with current share option)
Remote On/Off	RSW on CN3. A TTL low signal inhibits the output

Environmental

Parameter	Conditions	Min.	Typ.	Max.	Units
Operating Temperature Range	Ambient	0	+25	+50	°C
Output Derating	2.5%/ °C from +50 °C to +70 °C				
Storage Temperature Range		-20		+85	°C
Cooling	See Model Selection Guide				
Operating Humidity	RH, Non-condensing			90	%

Reliability Specifications

Parameter	Conditions	Min.	Typ.	Max.	Units
MTBF	MIL HDBK 217F, 30°C, Gnd Benign	150			kHours
Safety Standards	UL 60950; CSA C22.2 No. 60950; TUV EN60950; CB Report (IEC 60950)				
EMI Compliance	Compliance to EN55022 (CISPR22) Class B; EN61000-3-2,3				
EMS Immunity Compliance	EN6100-4-2,3,4,5,6,8,11; EN55024;; CE Marked (LVD)				



CB

RoHS

**PFC
ACTIVE**

MicroPower Direct

292 Page Street
Suite D
Stoughton, MA 02072
USA

T: (781) 344-8226
F: (781) 344-8481
E: sales@micropowerdirect.com
W: www.micropowerdirect.com



Model Selection Guide

Model Number	Output Voltage		Output Current (Notes 6, 7, 8)			Ripple & Noise	Efficiency (Note 7)
	Factory PreSet	Range (Note 5)	('U' units) Max. with 30 CFM	Min	"E" Units Int. Fan		
MPA600Rx-03zz	3.3 VDC	2.0 - 3.3 VDC	90.00A	0.0A	90.00A	75 mV p-p	70%
MPA600Rx-05zz	5 VDC	5.0 - 6.0 VDC	90.00A	0.0A	90.00A	75 mV p-p	75%
MPA600Rx-12zz	12 VDC	12.0 - 15.0 VDC	50.00A	0.0A	50.00A	1% p-p	80%
MPA600Rx-18zz	18 VDC	16.0 - 21.0 VDC	37.50A	0.0A	37.50A	1% p-p	83%
MPA600Rx-24zz	24 VDC	22.0 - 30.0 VDC	27.27A	0.0A	27.27A	1% p-p	83%
MPA600Rx-36zz	36 VDC	31.0 - 47.0 VDC	19.35A	0.0A	19.35A	1% p-p	83%
MPA600Rx-48zz	48 VDC	48.0 - 56.0 VDC	12.50A	0.0A	12.50A	1% p-p	83%

Notes:

- Models are available with leakage current specified as low as 750 µA. Contact the factory for details.
- Output regulation includes line & load.
- Ripple & noise is measured from 10 Hz to 20 MHz. Measurement connection to the unit is made with a 0.1 µF ceramic capacitor & a 22 µF electrolytic capacitor connected in parallel.
- Transient recovery is measured to within a 1% error band for a load step change of 50% to 100%.
- The full output range (see table above) is covered in the safety agency certification. Standard models are factory set to the "Preset" voltage. This may be set to other levels within the range without affecting the agency certification. Contact the factory for details.
- A minimum load of 1% is required to maintain load regulation and ripple specifications.
- Output current is given for the factory preset voltage. With the exception of the "03" (297W) and "05" (450W) output models, the maximum continuous output power level is 600W with 30 CFM. For more information, contact the factory.
- Units will provide peak power of 900W for 500 µs. For units capable of longer durations, contact the factory.

Input Connector CN1:

U-Chassis (U,C)
 Howder Terminal Block No. HD-121-3P (3-pin) or Mating Molex Part No. 09-91-0700 (7 pin, 5 used) or equivalent.

Enclosed with Fan (E)

Dinkle Terminal Block No. DT-35-A02W-3 (3-pin) or IEC 320 or equivalent snap-in mounting type.

Output Connector CN2:

Howder Terminal Block No. HD-121-8P (8-pin) or Mating Molex Part No. 09-91-2000 (20 pin) or equivalent.

Output Pin Assignment:

Howder	Molex
Pins 1 ~ 4: V+	Pins 1 ~ 10: V+
Pins 5 ~ 8: V-	Pins 11 ~ 20: V-


Logic Signal Connector CN3:

Mating JST XHP-7 or equivalent (CHYAO SHIUNN JS-2001-07).

Fan driver connector (FAN):

12 VDC / 500 mA is available to drive an external fan. Mating JST XHP-2 or equivalent (CHYAO SHIUNN JS-2001-02).


Mechanical Dimensions: U-Chassis (U Suffix)

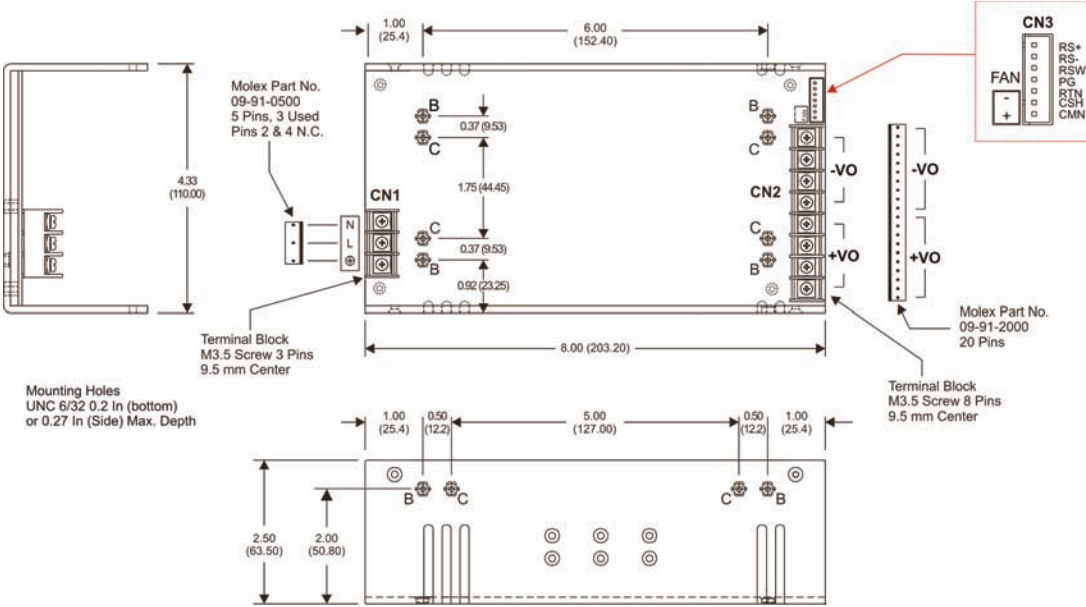


MPA600RXX-YYZZ

- Mechanical Configuration**
 U = U-Chassis
 C = U-Chassis with Cover
 E = Enclosure With End Fan
- Current Share Option**
 I = Current share capability
 Blank = No current share
- Output Voltage Selection**
 (i.e. 05 = 5 VDC, 24 = 24 VDC, etc)
- Input/Output Connector Type**
 T = Terminal Block
 M = Molex
 P = IEC320 Input (E Model Only)
- Conformal Coating**
 Blank = No Coating
 S = Conformal Coating

Enclosure With Fan (E Suffix)

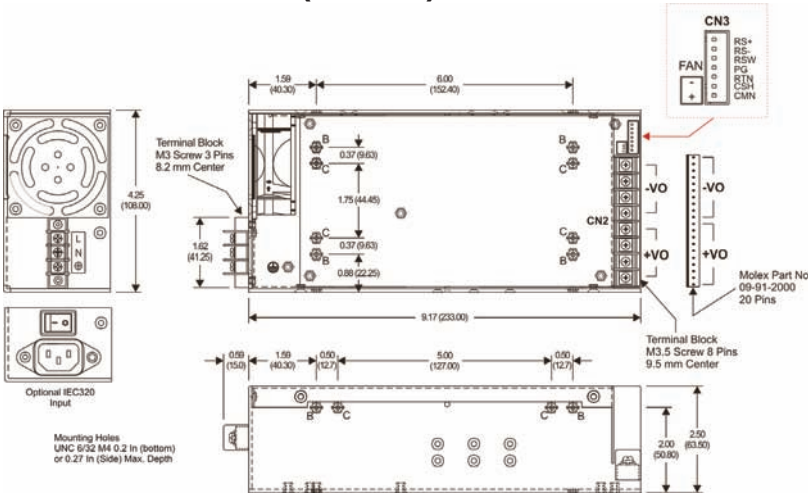

U-Chassis Cover (C Suffix)

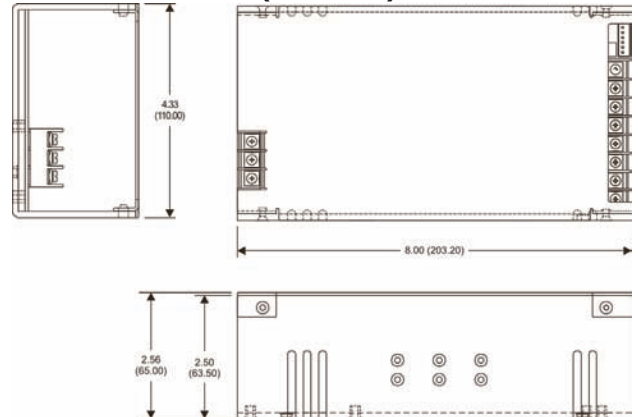

MicroPower Direct
www.micropowerdirect.com