


Three-Terminal Positive Voltage Regulator

LM78L08

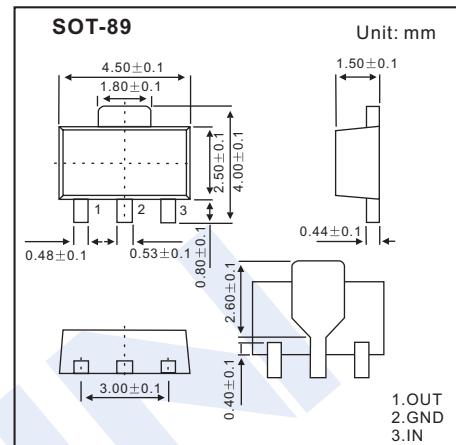

■ Features

- Maximum Output current I_o : 0.1A
- Output Voltage V_o : 8V
- Continuous Total Dissipation P_d : 0.5W ($T_a = 25^\circ\text{C}$)


■ Absolute Maximum Ratings (Operating temperature range applies unless otherwise specified)

Parameter	Symbol	Rating	Unit
Input Voltage	V_I	30	V
Operating Junction Temperature Range	T_{OPR}	-55 ~ +125	°C
Storage Temperature Range	T_{STG}	-55 ~ +150	°C

■ Electrical Characteristics ($V_I=14\text{V}$, $I_o=40\text{mA}$, $C_I=0.33\text{ }\mu\text{F}$, $C_O=0.1\text{ }\mu\text{F}$, unless otherwise specified)

Parameter	Symbol	Testconditons	Min	Typ	Max	Unit
Output Voltage	V_o	$T_J = 25^\circ\text{C}$	7.7	8.0	8.3	V
		$T_J = 0 \sim 125^\circ\text{C}$, $10.5\text{V} \leqslant V_I \leqslant 23\text{V}$, $I_o=1\text{mA} \sim 40\text{mA}$	7.6	8.0	8.4	V
		$T_J = 0 \sim 125^\circ\text{C}$, $I_o=1\text{mA} \sim 70\text{mA}$	7.6	8.0	8.4	V
Load Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $I_o=1\text{mA} \sim 100\text{mA}$		18	80	mV
		$T_J = 25^\circ\text{C}$, $I_o=1\text{mA} \sim 40\text{mA}$		10	40	mV
Line Regulation	ΔV_o	$T_J = 25^\circ\text{C}$, $10.5\text{V} \leqslant V_I \leqslant 23\text{V}$		42	175	mV
		$T_J = 25^\circ\text{C}$, $11\text{V} \leqslant V_I \leqslant 23\text{V}$		36	125	mV
Quiescent Current	I_Q	$T_J = 25^\circ\text{C}$		4	6	mA
Quiescent current Change	ΔI_Q	$T_J = 0 \sim 125^\circ\text{C}$, $11\text{V} \leqslant V_I \leqslant 23\text{V}$			1.5	mA
		$T_J = 0 \sim 125^\circ\text{C}$, $1\text{mA} \leqslant I_o \leqslant 40\text{mA}$			0.1	
Output Noise Voltage	V_N	$T_J = 25^\circ\text{C}$, $10\text{Hz} \leqslant f \leqslant 100\text{KHz}$		54		μV
Ripple Rejection	RR	$T_J = 0 \sim 125^\circ\text{C}$, $13\text{V} \leqslant V_I \leqslant 23\text{V}$, $f = 120\text{Hz}$	37	46		dB
Dropout Voltage	V_D	$T_J = 25^\circ\text{C}$			1.7	V


■ Typical Application

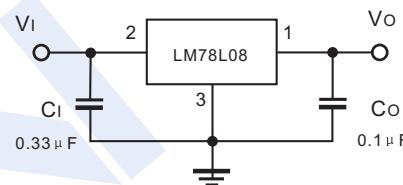


Note: Bypass capacitors are recommended for optimum stability and transient response and should be located as close as possible to the regulators.

LM78L08


■ Typical Characteristics

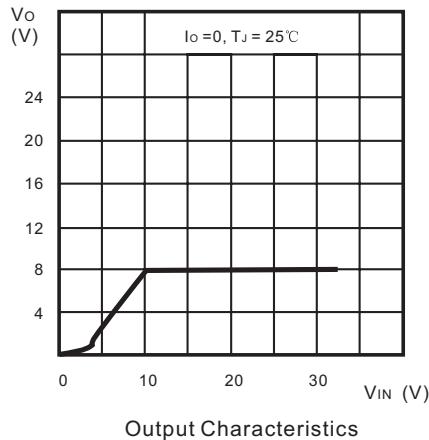


Output Characteristics

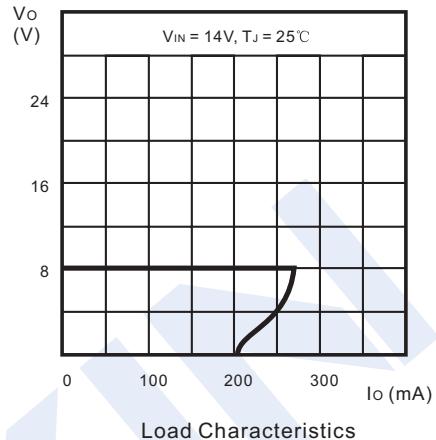


Load Characteristics

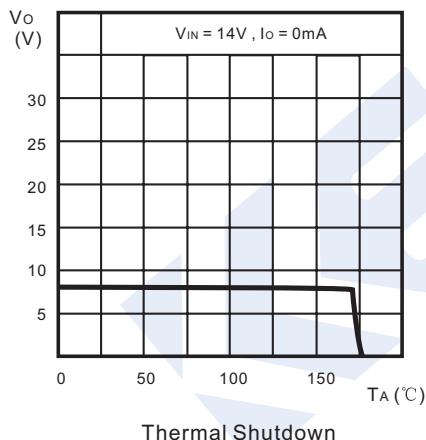

Thermal Shutdown

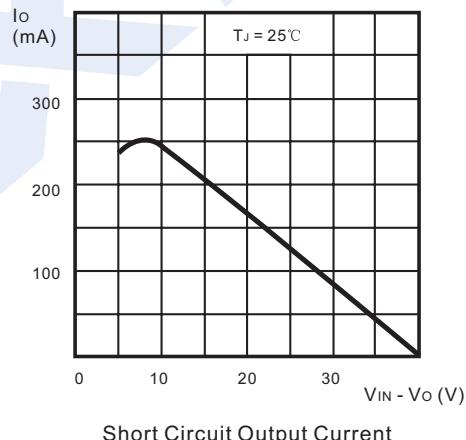

Short Circuit Output Current

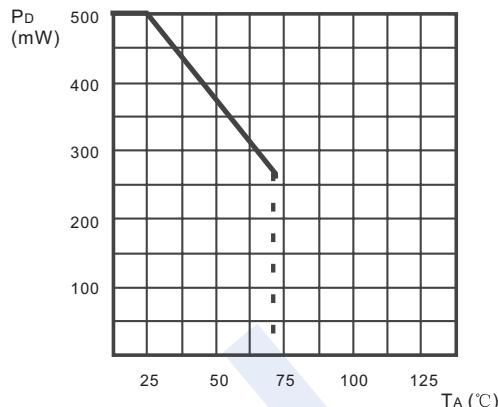

Power Dissipation vs. Ambient Temperature