

POLARIZATION INSENSITIVE FIBER ISOLATOR ARRAY (DUAL STAGE)

OIDA Series

Features

- ◆ Wide Operating Wavelength Range and Temperature Range
- ◆ Low Insertion Loss
- ◆ High Isolation
- ◆ Ultra Low PDL & Option for Ultra Low PMD
- ◆ Highly Stable & Reliable
- ◆ Epoxy-Free Optical Path
- ◆ Compact Package Size

Applications


- ◆ EDFA & Raman Amplifiers
- ◆ CATV Fiberoptic Links
- ◆ WDM Systems
- ◆ Fiberoptic Instruments
- ◆ Transmitters and Fiber Lasers
- ◆ Laboratory R&D
- ◆ Arrayed Modules

Oplink Fiber Optic Product Lines

- ◆ Amplifier Components
- ◆ Amplifier Modules
- ◆ DWDMs
- ◆ Switching/Routing/
- ◆ Monitoring/ Conditioning
- ◆ Transmission
- ◆ RGB Laser Modules

Polarization Insensitive Fiber Isolator Array (Dual Stage)

Oplink's dual-stage, multi-port isolator is an array device with the identical compact package size of a single-port isolator. It offers port options of dual or triple ports on both input and output sides. The Oplink isolator array minimizes back reflection and back scattering in the reverse direction for any state of polarization. It is a low cost model with high performance featuring low insertion loss, high isolation, low channel cross talk, high return loss, low polarization dependent loss (PDL) and low polarization mode dispersion (PMD). Oplink's innovative array solution provides significant space savings in EDFA array or multi-stage EDFA applications.

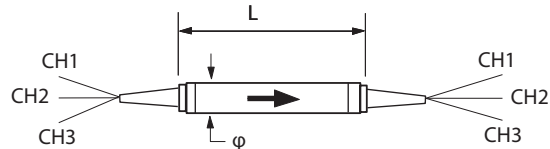

Performance Specifications

OIDA Series	Premium	Grade A	Unit
Operating Wavelength Range	1310±15 or 1480±15 or 1528~1564 or 1570~1605		nm
Insertion Loss	< 0.7	< 0.9	dB
Isolation (over wavelength range, 0~70°C, all SOP)	> 34	> 32	dB
Return Loss		> 50	dB
Polarization Dependent Loss	< 0.15	< 0.2	dB
Polarization Mode Dispersion (Low PMD)	< 0.05	< 0.05	ps
Maximum Power Handling		2000	mW
Channel Crosstalk		> 55	dB
Operating Temperature		0 to +70	°C
Storage Temperature		-40 to +85	°C
Package Dimensions		(φ) 5.5 x (L) 34	mm
Pigtail Coloring (both sides)	Ch.1 = Red	Ch.2 = Black	Ch.3 = Clear

Values are referenced without connector loss.

* The mechanical tolerance should be +/- 0.2 mm on all package dimensions unless otherwise custom specified.



POLARIZATION INSENSITIVE FIBER ISOLATOR ARRAY (DUAL STAGE)

Ordering Information

Oplink custom designs and manufactures high performance fiber optic networking components and integrated optical modules. Oplink can provide a remarkable range of customized optical solutions to meet your specific design needs. By combining our technical expertise with our extensive micro-optic manufacturing and packaging capability, your volume requirements for components and customized integrated products can be met. We are happy to discuss your requirements. Please contact Oplink's OEM Design Team or Sales Representative for ordering and price information (510) 933-7200.

