


Telecom Performance TCXO / VCTCXO



2111 Comprehensive Drive
Aurora, Illinois 60505
Phone: 630-851-4722
Fax: 630-851-5040
www.conwin.com
US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Description

The Connor-Winfield 5.0x7.0mm Temperature Compensated Crystal Controlled Oscillators and Voltage Controlled Temperature Compensated Crystal Controlled Oscillators are designed for use in S3 Telecom Applications. Through the use of Analog Temperature Compensation, this device is capable of holding sub 1-ppm stabilities over the commercial or the industrial temperature ranges. All models meet +/-4.6ppm accuracies for twenty years.




Features:

Miniature 5.0 x7.0mm Surface Mount Package
3.3V Operation
LVCMOS or Clipped Sinewave Output Logic
Frequency Stabilities Available:
TV50x / TV60x: +/-0.28ppm
TV51x / TV61x: +/-0.50ppm
TV52x / TV62x: +/-1.00ppm
Temperature Ranges Available:
TV5xx Series: 0 to 70°C
TV6xx Series: -40 to 85°C
Frequency Tolerance: +/-4.60ppm for 20 yrs.
Low Jitter <1pS RMS
Tape and Reel Packaging
RoHS Compliant / Lead Free 
Recommended for New Designs
Matches Vectron's VTC1-Series Footprint

Applications

STRATUM 3 Applications
Timing Reference

Package Layout

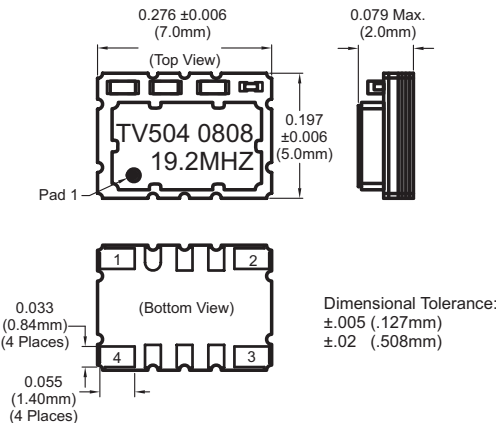

Pad Connections

1	Control Voltage or N/C
2	Ground
3	Output
4	Supply Voltage (Vcc)

Standard Frequencies Available *

6.4 MHz 9.72 MHz 10.0 MHz 10.24 MHz 12.5 MHz 12.8 MHz
13.5 MHz 19.44 MHz 20.0 MHz 20.48 MHz 25 MHz 27 MHz 38.88 MHz

* Available frequencies from the factory for small quantity orders or quick delivery. Additional frequencies are available.

Ordering Information

Table 1.0

TV	5	0	4	-	019.2M
Type: Precision TCXO VCTCXO 5x7mm 4 Pads	Temperature Range: 5 = 0 to 70° C 6 = -40 to 85° C	Frequency Stability: 0 = +/-0.28 ppm 1 = +/- 0.50 ppm 2 = +/- 1.00 ppm	Features: 2 = TCXO, LVCMOS, 3.3Vdc. 3 = TCXO, Clipped Sinewave, 3.3Vdc. 4 = VCTCXO, LVCMOS, 3.3Vdc. 5 = VCTCXO, Clipped Sinewave, 3.3Vdc.		Output Frequency: Frequency Format -xxx.xM Min.* -xxx.xxxxxM Max.* *Amount of numbers after the decimal point. M = MHz

Example:
TV504-019.2M = 5x7mm, TCXO, LVCMOS,
3.3Vdc, 0 to 70C, +/-0.28ppm, Output Frequency 19.2MHz

To order an TV504 with an output frequency of:
6.4 MHz = TV504-006.4M
20 MHz = TV504-020.0M
38.88 MHz = TV504-038.88M

Specifications subject to change without notice. All dimensions in inches. © Copyright 2008 The Connor-Winfield Corporation



Bulletin	Tx215
Page	1 of 4
Revision	01
Date	25 Aug 2008

Absolute Maximum Ratings

Table 2.0

Parameter	Minimum	Nominal	Maximum	Units	Notes
Storage Temperature	-55	-	125	°C	
Supply Voltage (Vcc)	-0.5	-	6.0	Vdc	
Input Voltage (Vcc)	-0.5	-	Vcc+0.6	Vdc	

Model Specifications

Table 3.0

Model Number	TV502	TV503	TV504	TV505	Notes
Output Type	LVC MOS	Clipped Sinewave	LVC MOS	Clipped Sinewave	
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Frequency Range	6.4 to 40 MHz				
Frequency Stability	±0.28ppm				1
Supply Voltage	3.3Vdc				
Temperature Range	0 to 70°C				
Holdover Stability	±0.32ppm				2

Table 4.0

Model Number	TV602	TV603	TV604	TV605	Notes
Output Type	LVC MOS	Clipped Sinewave	LVC MOS	Clipped Sinewave	
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Frequency Range	6.4 to 40 MHz				
Frequency Stability	±0.28ppm				1
Supply Voltage	3.3Vdc				
Temperature Range	-40 to 85°C				
Holdover Stability	±0.32ppm				2

Table 5.0

Model Number	TV512	TV513	TV514	TV515	Notes
Output Type	LVC MOS	Clipped Sinewave	LVC MOS	Clipped Sinewave	
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Frequency Range	6.4 to 40 MHz				
Frequency Stability	±0.50ppm				1
Supply Voltage	3.3Vdc				
Temperature Range	0 to 70°C				

Table 6.0

Model Number	TV612	TV613	TV614	TV615	Notes
Output Type	LVC MOS	Clipped Sinewave	LVC MOS	Clipped Sinewave	
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Frequency Range	6.4 to 40 MHz				
Frequency Stability	±0.50ppm				1
Supply Voltage	3.3Vdc				
Temperature Range	-40 to 85°C				

Table 7.0


Model Number	TV522	TV523	TV524	TV525	Notes
Output Type	LVC MOS	Clipped Sinewave	LVC MOS	Clipped Sinewave	
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Frequency Range	6.4 to 52 MHz				
Frequency Stability	±1.00ppm				1
Supply Voltage	3.3Vdc				
Temperature Range	0 to 70°C				

Table 8.0

Model Number	TV622	TV623	TV624	TV625	Notes
Output Type	LVC MOS	Clipped Sinewave	LVC MOS	Clipped Sinewave	
TCXO / VCTCXO	TCXO	TCXO	VCTCXO	VCTCXO	
Frequency Range	6.4 to 52 MHz				
Frequency Stability	±1.00ppm				1
Supply Voltage	3.3Vdc				
Temperature Range	-40 to 85°C				

Notes:


- 1) Frequency stability vs. change in temperature. $[\pm(F_{\max} - F_{\min})/2.F_0]$.
- 2) Inclusive of frequency stability, supply voltage change ($\pm 1\%$), aging, for 24 hours.




Features

TCXO
VCTCXO
3.3V Operation
LVC MOS Output
Clipped Sinewave Output
Frequency Stability:
TV50x/TV60xSeries ± 0.28 ppm
TV51x/TV61x-Series ± 0.50 ppm
TV52x/TV62x-Series ± 1.00 ppm
Temperature Range:
TV5xx-Series 0 to 70°C
TV6xx-Series -40 to 85°C
Low Jitter < 1pS RMS
Surface Mount Package
Tape and Reel Packing
RoHS Compliant / Lead Free
Recommended for New Designs
Matches Vectron's VTC1-Series
Footprint

LVC MOS Test Circuit

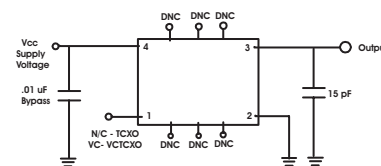

Clipped Sinewave Test Circuit

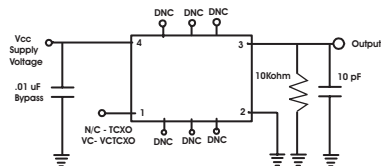

US Headquarters:
630-851-4722
European Headquarters:
+353-61-472221

Bulletin	Tx215
Page	2 of 4
Revision	01
Date	25 Aug 2008

Electrical Specifications for all Models

Operating Specifications

Table 9.0

Parameter		Minimum	Nominal	Maximum	Units	Notes
TCXO Frequency Calibration @ 25 C		-1.00	-	1.00	ppm	1
Supply Voltage Variation. (Vcc±5%)		-0.2	-	0.2	ppm	
Load Coefficient, ±5pF		-0.2	-	0.2	ppm	
Static Temperature Hysteresis		-0.4	-	0.4	ppm	2
Total Frequency Tolerance		-4.60	-	4.60	ppm	3
Supply Voltage	(Vcc)	3.135	3.3	3.465	Vdc	4
Supply Current	(Icc)	-	6	10	mA	
Period Jitter		-	3	5	ps rms	
Integrated Phase Jitter (BW= 12kHz to 20MHz)		-	0.3	1.0	ps rms	
SSB Phase Noise at 10Hz offset		-	-80	-70	dBc/Hz	
SSB Phase Noise at 100Hz offset		-	-110	-100	dBc/Hz	
SSB Phase Noise at 1KHz offset		-	-135	-130	dBc/Hz	
SSB Phase Noise at >10KHz offset		-	-150	-145	dBc/Hz	
SSB Phase Noise at >100KHz offset		-	-150	-150	dBc/Hz	
Start Up Time		-	-	10	ms	

Input Characteristics For Voltage Control (Pad 1)

Table 10.0

Parameter		Minimum	Nominal	Maximum	Units	Notes
Control Voltage Range (Vcc = 3.3V)	(Vc)	0.3	1.65	3.0	Vdc	
Frequency Tuning		±10	-	-	ppm	5
Linearity		±5	-	-	%	
Slope		Positive				

LVC MOS Output Characteristics

Table 11.0

Parameter		Minimum	Nominal	Maximum	Units	Notes
LOAD		-	-	15	pF	
Voltage (High)	(Voh)	90%Vcc	-	-	Vdc	
(Low)	(Vol)	-	-	10%Vcc	Vdc	
Current (High)	(Ioh)	-4	-	-	mA	
(Low)	(Iol)	-	-	4	mA	
Duty Cycle at 50% of Vcc		45	50	55	%	
Rise / Fall Time 10% to 90%		-	-	8	ns	


Clipped Sinewave Output Characteristics

Table 12.0

Parameter		Minimum	Nominal	Maximum	Units	Notes
Load		-	-	-		6
Output Load Resistance		-	10K	-	Ohms	
Output Load Capacitance		-	10	-	pF	
Output Voltage (< 40 MHz)		1.00	-	-	V pk-pk	
Output Voltage (> 40 MHz)		0.80	-	-	V pk-pk	

Notes:


- 1) TCXO: Initial calibration @ 25 C. Specifications at time of shipment after 48 hours of operation.
- 2) Frequency change after reciprocal temperature ramped over the operating range. Frequency measured before and after at 25°C.
- 3) Inclusive of calibration @ 25 C, frequency vs. change in temperature, change in supply voltage (±5%), load change (±5%), reflow soldering process and 20 years aging.
- 4) For best in application performance, careful selection of an external power source is critical. Select an external regulator that meets or exceeds to following specifications regarding voltage regulation tolerance, initial accuracy, temperature coefficient, voltage noise, and low voltage noise density.
Factory Test Conditions: Initial Accuracy ±2mv, Noise (0.1Hz to 10 KHz) 15uV p-p, Voltage Noise Density = 50nV/√Hz, Temperature Coefficient < 5ppm/°C.
- 5) Additional pull ranges are available; please contact the factory for additional information.
- 6) Output is AC coupled.




Features

TCXO
 VCTCXO
 3.3V Operation
 LVC MOS Output
 Clipped Sinewave Output
 Frequency Stability:
 TV50x/TV60xSeries +/-0.28ppm
 TV51x/TV61x-Series +/-0.50ppm
 TV52x/TV62x-Series +/-1.00ppm
 Temperature Range:
 TV5xx-Series 0 to 70°C
 TV6xx-Series -40 to 85°C
 Low Jitter < 1pS RMS
 Surface Mount Package
 Tape and Reel Packing
 RoHS Compliant / Lead Free
 Recommended for New Designs
 Matches Vectron's VTC1-Series
 Footprint

LVC MOS Test Circuit

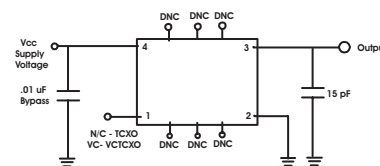


Clipped Sinewave Test Circuit

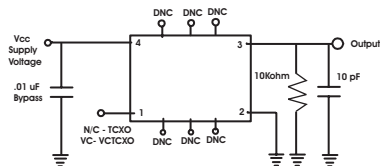


US Headquarters:
 630-851-4722
 European Headquarters:
 +353-61-472221

Bulletin	Tx215
Page	3 of 4
Revision	01
Date	25 Aug 2008

Design Recommendations

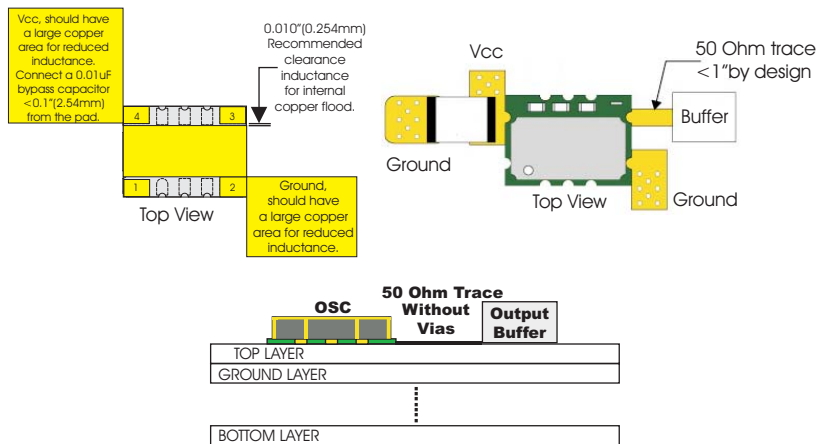


Typical Phase Noise

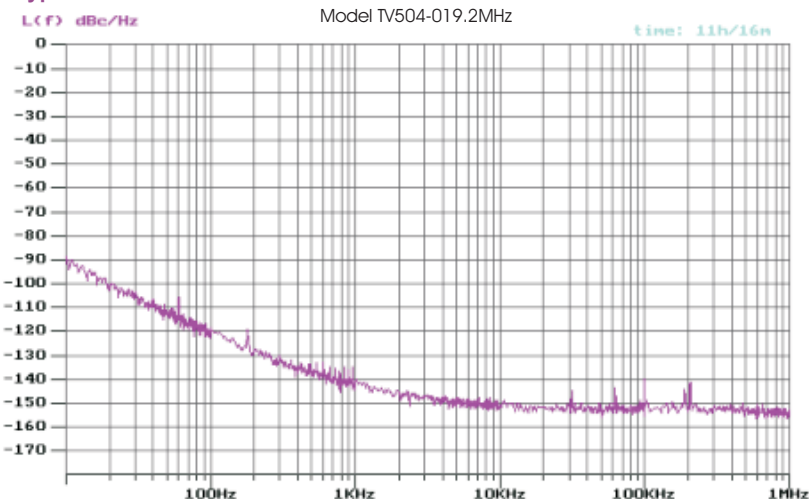

Tape and Reel Specifications

Meets EIA-481A and EIJ-1009B
2000 Pieces/Reel Maximum.

4-PAD Ceramic Package
0.197x0.295 (5.0x7.0mm)
Standard Orientation

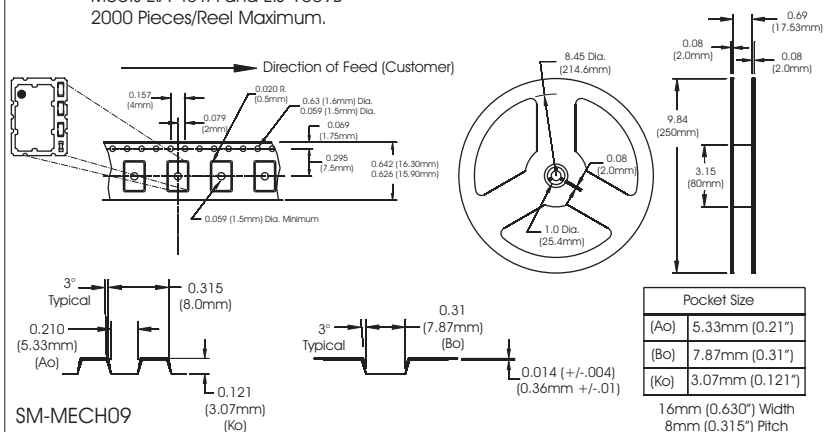

Package Characteristics

Table 13.0


Package	Ceramic Surface Mount Package.
---------	--------------------------------

Environmental Characteristics


Table 14.0

Vibration:	Vibration per Mil Std 883E Method 2007.3 Test Condition A
Shock:	Mechanical Shock per Mil Std 883E Method 2002.4 Test Condition B.
Soldering:	SMD product suitable for Convection Reflow soldering. Peak temperature 260 C. Maximum time above 220 C, 60 seconds.
Solderability:	Solderability per Mil Std 883E Method 2003


Suggested Pad Layout

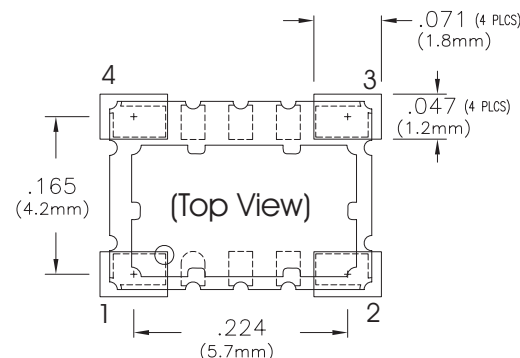


Solder Profile



LVC MOS Output Waveform

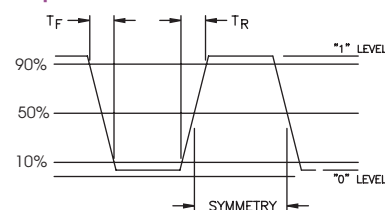

Clipped Sinewave Output Waveform



US Headquarters:
630-851-4722

European Headquarters:
+353-61-472221

Bulletin	Tx215
Page	4 of 4
Revision	01
Date	25 Aug 2008