

RoHS Compliant



E-Series 4-Way 0° Power Divider
2 – 1000 MHz

MAPD-007246-ES4700
V1P


Features

- Surface mount
- Wide frequency range
- 4-Way—0°
- Lead Free
- RoHS* Compliant and is 260°C reflow compatible.
- Available on Tape and Reel, reel quantity 2000

Description

M/A-COM's MAPD-007246-ES4700 is a RoHS compliant 4 Way 0° Power Divider in a low cost, surface mount package. Ideally suited for high volume cellular and wireless applications. Parts are packaged in tape & reel.

SM-46 package

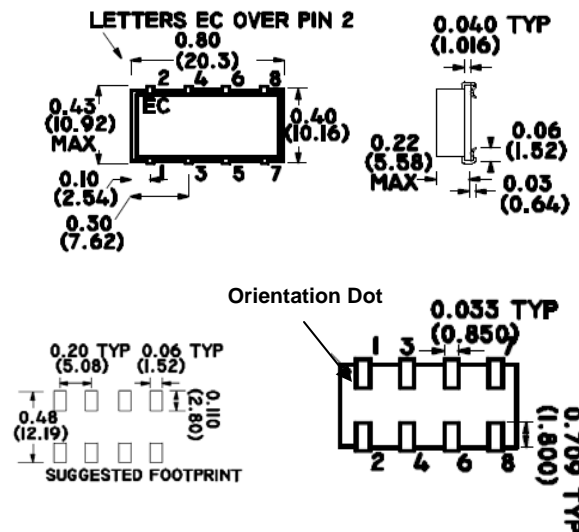

Pin Configuration

Pin No.	Function
1	Ground
2	Port 1
3	Input
4	Port 2
5	Ground
6	Port 3
7	Ground
8	Port 4

Absolute Maximum Ratings^{1,2}

Parameter	Absolute Maximum
Maximum Power Rating	1 Watt
Internal Load Dissipation	0.125 Watt
Pin Temperature (10 Sec)	260°C
Operating Temperature	-0°C to +70°C
Operating Temperature ²	-40°C to +85°C
Storage Temperature	-55°C to +125°C

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

Ordering Information

Part Number	Package
MAPD-007246-ES4700	300 piece reel

Note: Reference Application Note M513 for reel size information.

This PRELIMINARY Data Sheet contains information regarding a product M/A-COM has under development. Performance is based on measured results and target specifications. Commitment to produce in volume is not guaranteed.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
 • **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588
 Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

E-Series 4-Way 0° Power Divider
2 – 1000 MHz

MAPD-007246-ES4700
V1P

Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 50\Omega$ ¹

Parameter	Test Conditions	Frequency	Units	Min	Typ	Max
RF Frequency	—	2 - 1000	MHz	—	—	—
Insertion Loss	F_L — f_U	2 - 20	dB	—	0.5	0.8
		20 –500	dB	—	0.7	1.1
		500 - 1000	dB	—	0.8	1.5
Isolation	F_L — f_U	2 - 20	dB	20	35	—
		20 –500	dB	20	35	—
		500 - 1000	dB	15	23	—
Input & Output Return Loss	F_L — f_U	2 - 1000	dB	15.0	—	—
Amplitude Unbalance	F_L — f_U	2 - 20	dB	—	—	0.1
		20 –500	dB	—	—	0.2
		500 - 1000	dB	—	—	0.5
Phase Unbalance	F_L — f_U	2 - 20	Degrees	—	—	1°
		20 –500	Degrees	—	—	5°
		500 - 1000	Degrees	—	—	10°