

**Silicon PNP Power Transistors**

**2SA1291**

**DESCRIPTION**


- With TO-220 package
- Low collector saturation voltage.
- Short switching time.
- Complement to type 2SC3255

**APPLICATIONS**

- Various inductance lamp drivers for electrical equipment.
- Inverters, converters
- Power amplifier
- High-speed switching

**PINNING**

PIN	DESCRIPTION
1	Emitter
2	Collector;connected to mounting base
3	Base

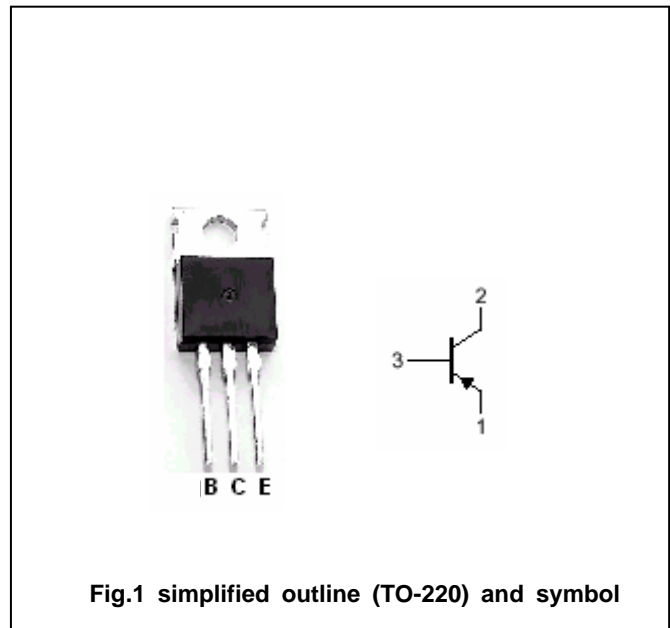

**ABSOLUTE MAXIMUM RATINGS (T<sub>C</sub>=25°C)**

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V <sub>CBO</sub>	Collector-base voltage	Open emitter	-80	V
V <sub>CEO</sub>	Collector-emitter voltage	Open base	-60	V
V <sub>EBO</sub>	Emitter-base voltage	Open collector	-5	V
I <sub>C</sub>	Collector current		-10	A
I <sub>CM</sub>	Collector current-peak		-12	A
P <sub>C</sub>	Collector power dissipation	T <sub>C</sub> =25°C	40	W
T <sub>j</sub>	Junction temperature		150	°C
T <sub>stg</sub>	Storage temperature		-55~150	°C

## Silicon PNP Power Transistors

## 2SA1291

## CHARACTERISTICS

T<sub>j</sub>=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V <sub>(BR)CBO</sub>	Collector-base breakdown voltage	I <sub>C</sub> =-1mA, I <sub>E</sub> =0	-80			V
V <sub>(BR)CEO</sub>	Collector-emitter breakdown voltage	I <sub>C</sub> =-1mA, I <sub>B</sub> =0	-60			V
V <sub>(BR)EBO</sub>	Emitter-base breakdown voltage	I <sub>E</sub> =-1mA, I <sub>C</sub> =0	-5			V
V <sub>CE(sat)</sub>	Collector-emitter saturation voltage	I <sub>C</sub> =-5A; I <sub>B</sub> =-0.25A			-0.4	V
I <sub>CBO</sub>	Collector cut-off current	V <sub>CB</sub> =-40V; I <sub>E</sub> =0			-100	μ A
I <sub>EBO</sub>	Emitter cut-off current	V <sub>EB</sub> =-4V; I <sub>C</sub> =0			-100	μ A
h <sub>FE</sub>	DC current gain	I <sub>C</sub> =-1A; V <sub>CE</sub> =-2V	70		280	
f <sub>T</sub>	Transition frequency	I <sub>C</sub> =-1A; V <sub>CE</sub> =-5V		100		MHz

## Switching times

t <sub>on</sub>	Turn-on time	I <sub>C</sub> =5A I <sub>B1</sub> =- I <sub>B2</sub> =0.25A V <sub>CC</sub> =20V; R <sub>L</sub> =6.67 Ω		0.1		μ s
t <sub>s</sub>	Storage time			0.5		μ s
t <sub>f</sub>	Fall time			0.1		μ s

h<sub>FE</sub> Classifications

Q	R	S
70-140	100-200	140-280

Silicon PNP Power Transistors

2SA1291

PACKAGE OUTLINE

