

# Tri-State Enable/Disable 3.3V Oscillator



Model: F5C-2E3LF Series

RoHS Compliant / Pb Free

Rev. 9/18/2006

[http://www.foxonline.com/need\\_a\\_sample.htm](http://www.foxonline.com/need_a_sample.htm)



## FEATURES

- 3.3V Operation
- HCMOS Output
- Tri-State Enable/Disable
- 14-Pin DIP

## OPTIONS

- 8-Pin DIP Available (H5C-2E3LF)

## • PART NUMBER SELECTION [Learn More](#) - Internet Required

Part Number	Model Number	Frequency Stability <sup>1</sup>	Operating Temperature(°C)	Frequency Range (MHz)
148LF-Freq-xxxxx	F5C-2E3LF	±100PPM	0 ~ +70	1.000~160.000
355LF-Freq-xxxxx	F5C-2E3RLF	±100PPM	-40 ~ +85	1.000~160.000
328LF-Freq-xxxxx	F6C-2E3LF	±50PPM	0 ~ +70	1.000~160.000
356LF-Freq-xxxxx	F6C-2E3RLF	±50PPM	-40 ~ +85	1.000~160.000
329LF-Freq-xxxxx	F7C-2E3LF	+25PPM	0 ~ +70	1.000~160.000
358LF-Freq-xxxxx	F7C-2E3RLF	+25PPM	-40 ~ +85	1.000~125.000
567LF-Freq-xxxxx	F8C-2E3LF	±20PPM	0 ~ +70	1.000~125.000

## • ELECTRICAL CHARACTERISTICS

PARAMETERS	MAX (unless otherwise noted)
Frequency Range (Fo)	1.000 ~ 160.000 MHz
Storage Temperature Range (Tstg)	-55°C ~ +125°C
Supply Voltage (VDD)	3.3V ± 10%
Input Current (IDD)	
1.000 ~ 23.999 MHz	15mA
24.000 ~ 49.999 MHz	20mA
50.000 ~ 69.999 MHz	40mA
70.000 ~ 125.000 MHz	45mA
125.000 ~ 160.000 MHz	60mA
Output Symmetry (50% VDD)	40% ~ 60%
Rise Time (10% ~ 90% VDD) (Tr)	10 nS
Fall Time (90% ~ 10% VDD) (Tf)	10 nS
Output Voltage (VOL)	10% VDD
(VOH)	90% VDD Min
Output Current (IOL)	8mA Min
(IOH)	-8mA Min
Output Load (HCMOS)	15pF
Start-up Time (Ts)	10mS
Output Enable/Disable Time <sup>2</sup>	100nS


<sup>1</sup> Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, aging, shock, and vibration.

<sup>2</sup> An internal pullup resistor from pin 1 to VDD allows active output if pin 1 is left open.

All specifications subject to change without notice.

## Learn more about: Part Marking Identification Mechanical Specification

Internet required

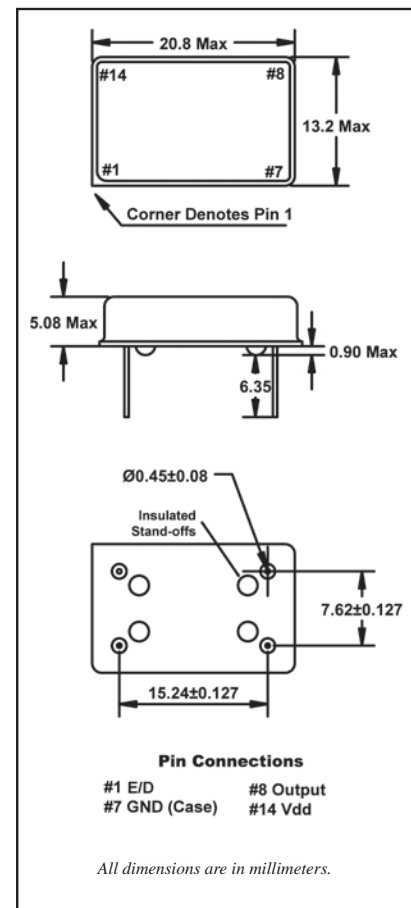

## • ENABLE / DISABLE FUNCTION

INH (Pin 1)	OUTPUT (Pin 8)
OPEN <sup>2</sup>	ACTIVE
'1' Level V <sub>IH</sub> ≥ 2.2 V	ACTIVE
'0' Level V <sub>IL</sub> ≤ 0.8 V	High Z