

100mA / 50V Digital transistors

(with built-in resistors)

DTC144GE / DTC144GUA / DTC144GKA

Applications

Inverter, Interface, Driver

• Features

- 1)The built-in bias resistors consist of thin-film resistors with complete isolation to allow negative biasing of the input, and parasitic effects are almost completely eliminated.
- Only the on / off conditions need to be set for operation, making the device design easy.
- 3)Higher mounting densities can be achieved.


• Structure

NPN epitaxial planar silicon transistor (Resistor built-in type)

• Packaging specifications

	Package	EMT3	UMT3	SMT3
	Packaging type	Taping	Taping	Taping
	Code	TL	T106	T146
Part No.	Basic ordering unit (pieces)	3000	3000	3000
DTC144GE		0	_	_
DTC144GU	A	-	0	_
DTC144GK	A	-	-	0

Inner circuit




R=47kΩ

• Absolute maximum ratings (Ta=25°C)

Pa	rameter	Symbol	Limits	Unit
Collector-base voltage		Vсво	50	V
Collector-emitter voltage		VCEO	50	V
Emitter-base voltage		Vebo	5	V
Collector current		lc	100	mA
Collector power dissipation	DTC144GE	Pc	150	mW
	DTC144GUA / DTC144GKA	FC	200	11144
Junction temperature		Tj	150	°C
Storage temperature		Tstg	-55 to +150	°C

• Dimensions (Unit : mm)

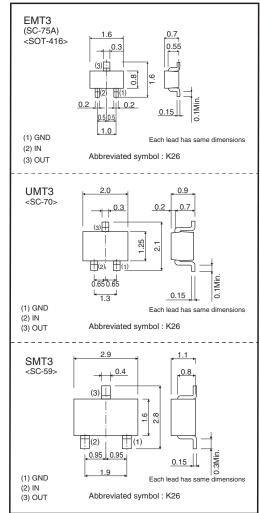

• Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Тур.	Max.	Unit	Conditions
Collector-base breakdown voltage	ВУсво	50	-	-	V	Ic=50μA
Collector-emitter breakdown voltage	BVCEO	50	-	-	V	Ic=1mA
Emitter-base breakdown voltage	BVEBO	5	-	-	V	Ιε=160μΑ
Collector cutoff current	Ісво	-	-	0.5	μA	Vcb=50V
Emitter cutoff current	Іево	65	-	130	μA	VEB=4V
Collector-emitter saturation voltage	VCE(sat)	-	-	0.3	V	Ic=10mA, Iв=0.5mA
DC current transfer ratio	hfe	68	-	-	-	Ic=5mA , Vce=5V
Emitter-base resistance	R	32.9	47	61.1	kΩ	_
Transition frequency	f⊤ *	-	250	-	MHz	Vce=10V , Ie= -5mA , f=100MHz

* Characteristics of built-in transistor

	Notes
	ng or reproduction of this document, in part or in whole, is permitted without the f ROHM Co.,Ltd.
The conte	nt specified herein is subject to change for improvement without notice.
"Products	nt specified herein is for the purpose of introducing ROHM's products (hereinafte "). If you wish to use any such Product, please be sure to refer to the specifications be obtained from ROHM upon request.
illustrate t	of application circuits, circuit constants and any other information contained herein he standard usage and operations of the Products. The peripheral conditions mus nto account when designing circuits for mass production.
However,	e was taken in ensuring the accuracy of the information specified in this document should you incur any damage arising from any inaccuracy or misprint of sucl n, ROHM shall bear no responsibility for such damage.
examples implicitly, other part	ical information specified herein is intended only to show the typical functions of and of application circuits for the Products. ROHM does not grant you, explicitly o any license to use or exercise intellectual property or other rights held by ROHM and ies. ROHM shall bear no responsibility whatsoever for any dispute arising from the h technical information.
equipmen	icts specified in this document are intended to be used with general-use electronic t or devices (such as audio visual equipment, office-automation equipment, commu evices, electronic appliances and amusement devices).
The Produ	cts specified in this document are not designed to be radiation tolerant.
	HM always makes efforts to enhance the quality and reliability of its Products, a ay fail or malfunction for a variety of reasons.
against th failure of a shall bear	sure to implement in your equipment using the Products safety measures to guard e possibility of physical injury, fire or any other damage caused in the event of the any Product, such as derating, redundancy, fire control and fail-safe designs. ROHM no responsibility whatsoever for your use of any Product outside of the prescribed not in accordance with the instruction manual.
system wi may result instrument fuel-contro any of the	acts are not designed or manufactured to be used with any equipment, device on hich requires an extremely high level of reliability the failure or malfunction of which t in a direct threat to human life or create a risk of human injury (such as a medica t, transportation equipment, aerospace machinery, nuclear-reactor controller oller or other safety device). ROHM shall bear no responsibility in any way for use o Products for the above special purposes. If a Product is intended to be used for an ial purpose, please contact a ROHM sales representative before purchasing.
be control	nd to export or ship overseas any Product or technology specified herein that may led under the Foreign Exchange and the Foreign Trade Law, you will be required to cense or permit under the Law.



Thank you for your accessing to ROHM product informations. More detail product informations and catalogs are available, please contact us.

ROHM Customer Support System

http://www.rohm.com/contact/