


MUR260S

GLASS PASSIVATED JUNCTION Ultra fast Plastic Rectifiers

VOLTAGE: 600V

CURRENT:2.0A




FEATURE

Plastic package has Underwriters Laboratories Flammability Classification 94V-0
Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
Ultra fast recovery time for high efficiency
Excellent high temperature switching
Glass passivated junction
High temperature soldering guaranteed:
250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

MECHANICAL DATA

Case: JEDEC DO-41 molded plastic body over passivated chip
Terminals: Plated axial leads, solderable per MIL-STD-202E, Method 208C
Polarity: Color band denotes cathode end
Mounting Position: Any

DO-41/DO-204AL

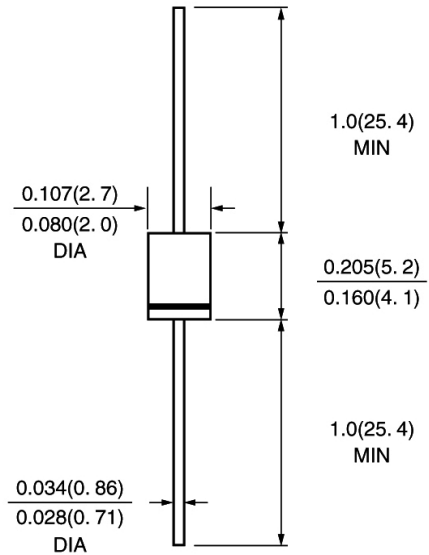

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

(single-phase, half-wave, 60HZ, resistive or inductive load rating at 25°C, unless otherwise stated)

| | SYMBOL | MUR260S | units |
|---|-----------------------------------|-------------|-------|
| Maximum Recurrent Peak Reverse Voltage | V _{rrm} | 600 | V |
| Maximum RMS Voltage | V _{rms} | 420 | |
| Maximum DC blocking Voltage | V _{dc} | 600 | V |
| Maximum Average Forward Rectified at=60°C | I _{f(av)} | 2.0 | A |
| Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load | I _{fsm} | 35 | A |
| Maximum Forward Voltage at rated Forward Current and 25°C | V _f | 1.35 | V |
| Maximum Reverse Recovery Time (Note 1) | T _{rr} | 50 | nS |
| Typical thermal resistance junction to ambient (Note 2) | R _{th(ia)} | 50 | °C/W |
| Maximum DC Reverse Current Ta =25°C at rated DC blocking voltage Ta =125°C | I _r | 10 100 | μA |
| Storage and Operating Temperature Range | T _{stg} , T _j | -55 to +175 | °C |

Note:

1. Reverse Recovery Condition I_f =0.5A, I_r =1.0A, I_{rr} =0.25A
2. Thermal Resistance from Junction to Ambient at 3/8" lead length, P.C. Board Mounted

RATINGS AND CHARACTERISTIC CURVES MUR260S

Fig. 1 – Forward Current Derating Curve

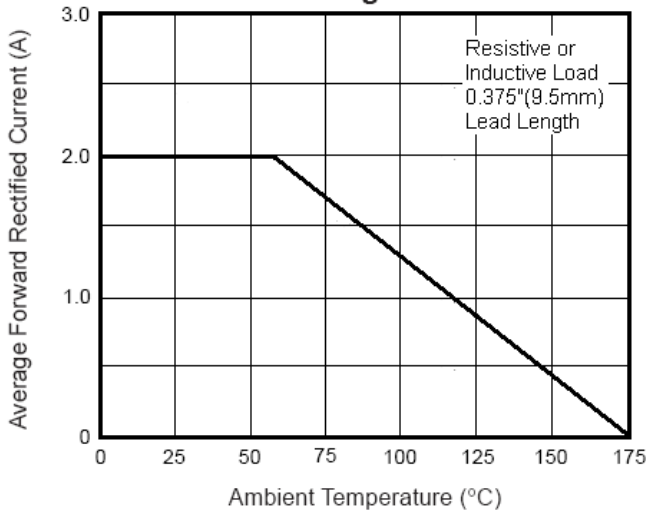


Fig. 2 – Maximum Non-Repetitive Peak Forward Surge Current

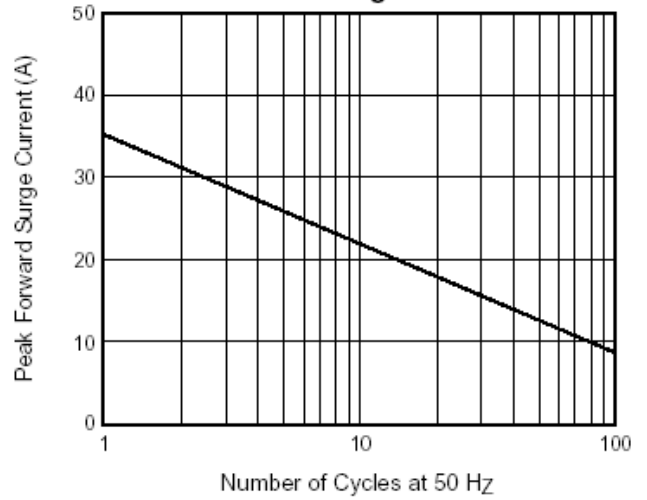


Fig. 3 – Typical Instantaneous Forward Characteristics

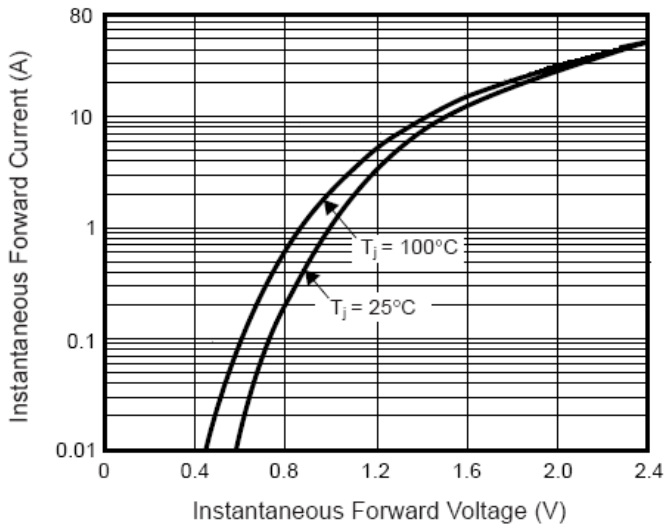


Fig. 4 – Typical Reverse Leakage Characteristics

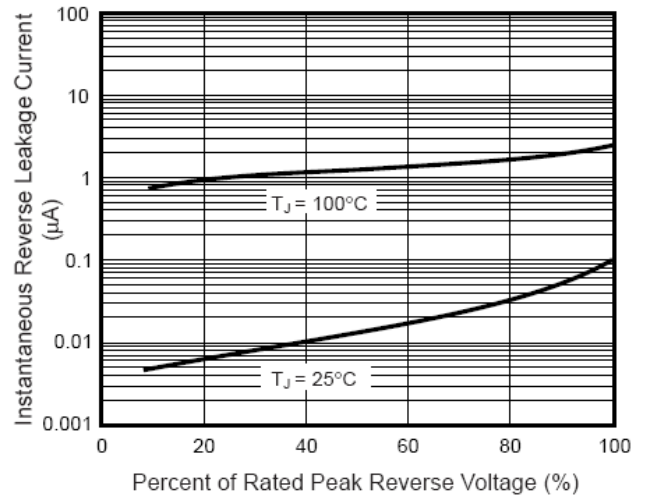


Fig. 5 – Typical Junction Capacitance

