


..... **OUTLINE DIMENSION & BLOCK DIAGRAM**

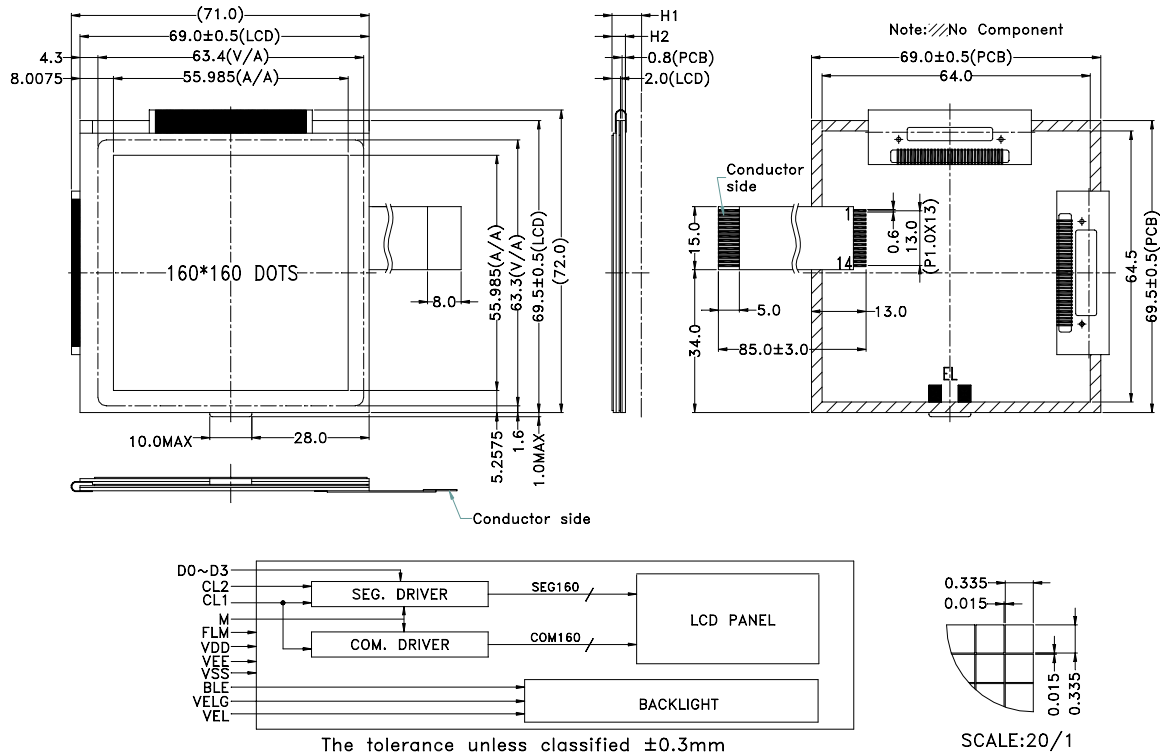

MECHANICAL SPECIFICATION			
Overall Size	69.0 x 69.5 mm	Module	H2 / H1
View Area	63.4 x 63.3 mm	W/O B/L	2.9 / 5.0
Dot Size	0.335 x 0.335 mm	EL B/L	3.2 / 7.0
Dot Pitch	0.35 x 0.35 mm	LED B/L	- / -

PIN ASSIGNMENT		
Pin No.	Symbol	Function
1	CL2(SCP)	Data shift pulse
2	CL1(LP)	Data latch pulse
3	FLM	Scan start-up signal
4	M	Frame reverse signal(Alternate signal)
5	D0	Data display
6	D1	Data display
7	D2	Data display
8	D3	Data display
9	V <sub>EE</sub>	Power supply voltage for LCD(+V)
10	V <sub>DD</sub>	Power supply voltage for logic
11	V <sub>SS</sub>	Ground
12	BLE	EL enable/disable
13	VELG	Power supply for EL(-)
14	VEL	Power supply for EL(+)

ABSOLUTE MAXIMUM RATING						
Item	Symbol	Condition	Min.	Max.	Units	
Supply for logic voltage	V <sub>DD</sub> -V <sub>SS</sub>	25°C	-0.3	7.0	V	
LCD driving supply voltage	V <sub>DD</sub> -V <sub>EE</sub>	25°C	-0.3	30.0	V	
Input Voltage	V <sub>IN</sub>	25°C	-0.3	V <sub>DD</sub> +0.3	V	

ELECTRICAL CHARACTERISTICS									
Item	Symbol	Condition	Min.	Typical	Max.	Units			
Power supply voltage	V <sub>DD</sub> -V <sub>SS</sub>	25°C	2.7	-	5.5	V			
LCD operation voltage	V <sub>OP</sub>	T <sub>OP</sub>	N	W	N	W	V		
		-20°C	-	-	20.6	-	-	V	
		0°C	-	19.4	-	19.6	-	20.2	V
		25°C	-	18.4	-	19.0	-	19.6	V
		50°C	-	17.6	-	18.1	-	18.6	V
		70°C	-	-	17.5	-	-	V	
LCM current consumption (No B/L)	I <sub>DD</sub>	V <sub>DD</sub> =5V	-	0.3	-	mA			
	I <sub>EE</sub>	V <sub>DD</sub> =5V	-	4.0	-	mA			
Backlight current consumption	EL	V <sub>OP</sub> =5V	-	40.0	-	mA			

**REMARK**

LCD option: STN, FSTN

Backlight Option: EL backlight feature, other specs not available on catalog is under request.