


**FEMALE HEADERS**

**FEMALE HEADER STRAIGHT - 5.2mm PROFILE**

- Industry compatible
- Competitively priced
- Single or dual Row
- No. of contacts 02-80
- Gold plated contacts
- 2.54mm pitch

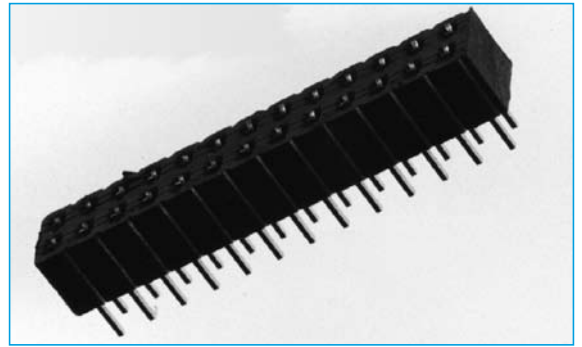


SECTION 8

**SPECIFICATION**



**Material & Finish**

- Contact Material:** Brass
- Insulator Material:** PBT & Glass-Fibre Reinforced UL-94V-0
- Current Rating:** 1 A DC
- Contact Resistance:** 30M  $\Omega$  Max
- Insulator Resistance:** 3000M  $\Omega$  Min
- Dielectric Withstanding Voltage:** 500V AC for One Minute
- Operating Temperature:** -40°C to + 105°C

**OUTLINE DRAWING**

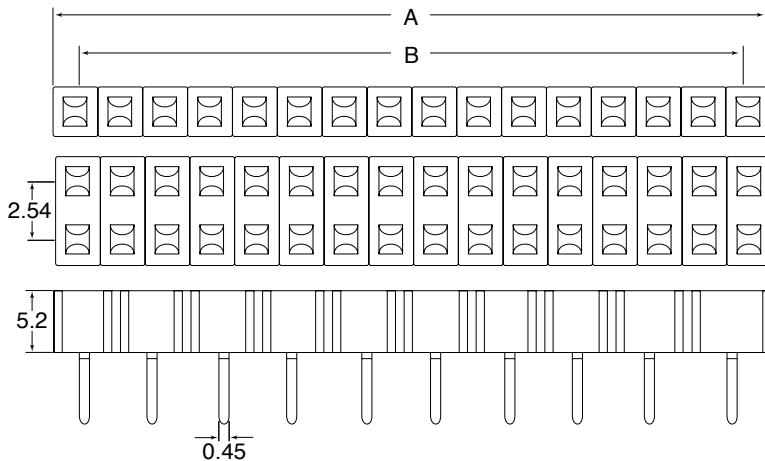

A = 2.54mm x N° of Contacts  
 B = (2.54mm x N° of Contacts) -1



**ORDERING INFORMATION**

DBC	IDC	B3	S	04	A	G	1
Dubilier Connectors	IDC Connector	Series	N° of Rows	N° of Contacts/per row	Contact Material	Contact Plating	Colour
			S = Single Row D = Dual Row	02=2way Thro to 50=50way	A=Brass	G= Gold Flash	1=Black