

This filter has been designed to operate with the Vicor "VI- HAMD / BAMD harmonic attenuator modules" to meet EN5022, class B.

The filter will also function very well with most other switching regulators

Order P/N: FF-1319-13

Unit Shipping weight: 2.4 lbs (1.09 Kg)

Operating Voltage = DC to 250 Vac

Operating Current (Max)= 13A

Frequency = 50/60 HZ

Temp. Range (Storage) = -40 to 100 C



Temp Range (Operating) @ 13.0 A = -20 to 40 C

Diel. Withstanding Voltage (Ph - Case) = 1500 Vac



Diel Withstanding Voltage (Ph - Ph) = 1500 Vdc

Leakage current @ 250 Vac, 60 HZ = 2.5 MA max.

Discharge Voltage after 60 sec = 34 V max.

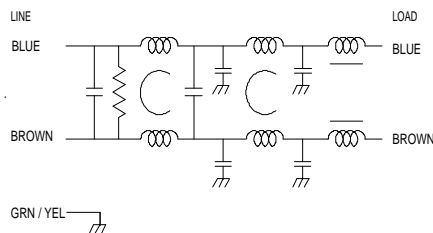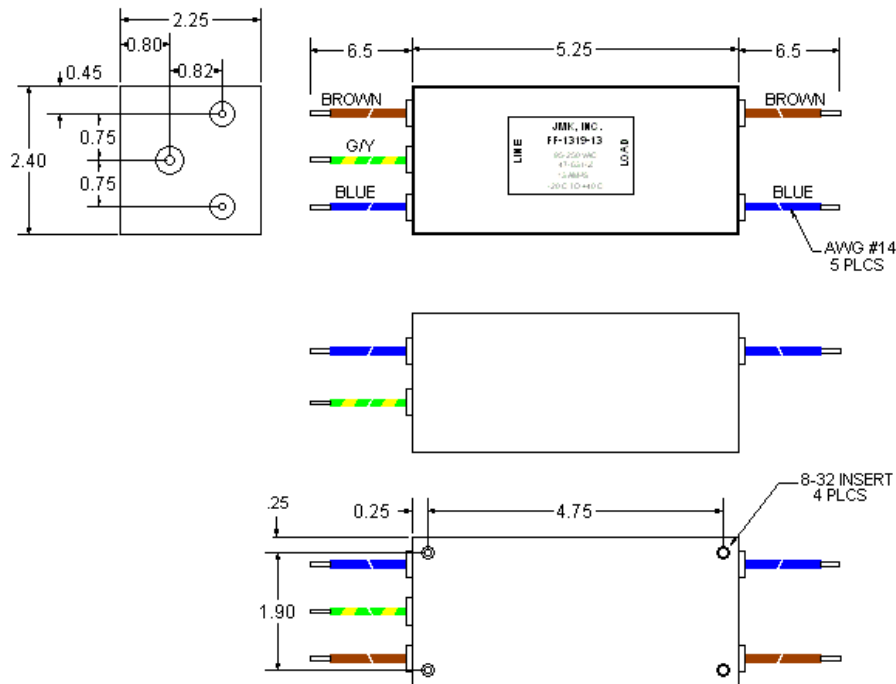

OPERATING CURRENT VS AMBIENT TEMPERATURE

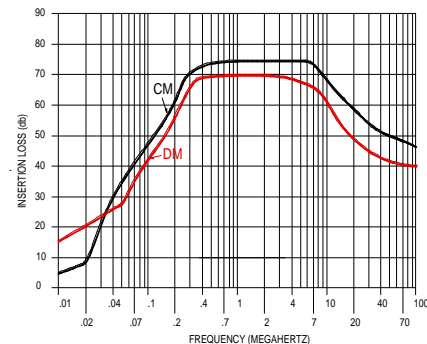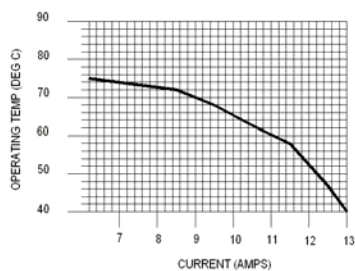

USA JMK Inc 15 Caldwell Dr. Amherst, NH 03031 PH: 603 886-4100 FX: 603 886-4115

email: info@jmkfilters.com

EUR JMK Inc Glasgow G13 1DN Scotland UK PH: 44-(0) 7785310729 FX: 44-(0) 141-589-1884