

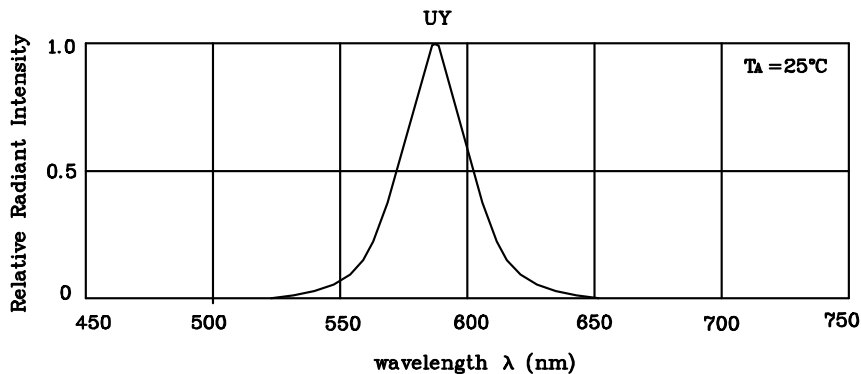
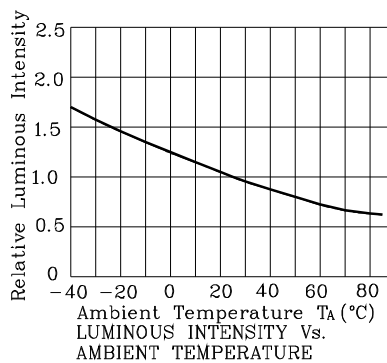
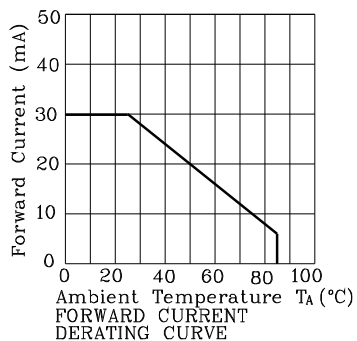



Part Number	Emitting Color	Emitting Material	Luminous Intensity (IF=10mA) ucd	Wavelength nm λ P	Description	
			min.	typ.		
DUY20C-A	Yellow	GaAsP/GaP	1200	4690	590	Common Cathode, Rt. & Lt. Hand Decimal
Published Date : MAR.01.2008		Drawing No : SDSA2125		V3	Checked : Shin Chi	P.1/4

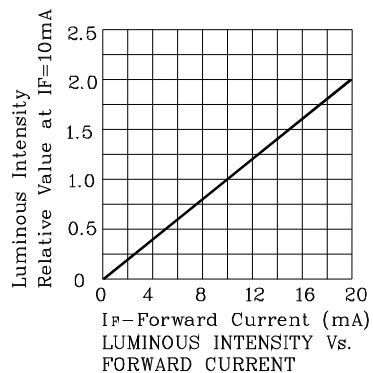

❖ **UY**

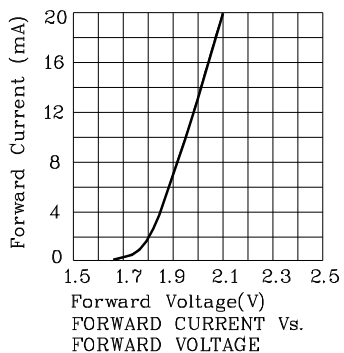

Wave Soldering Profile For Lead-free Through-hole LED.

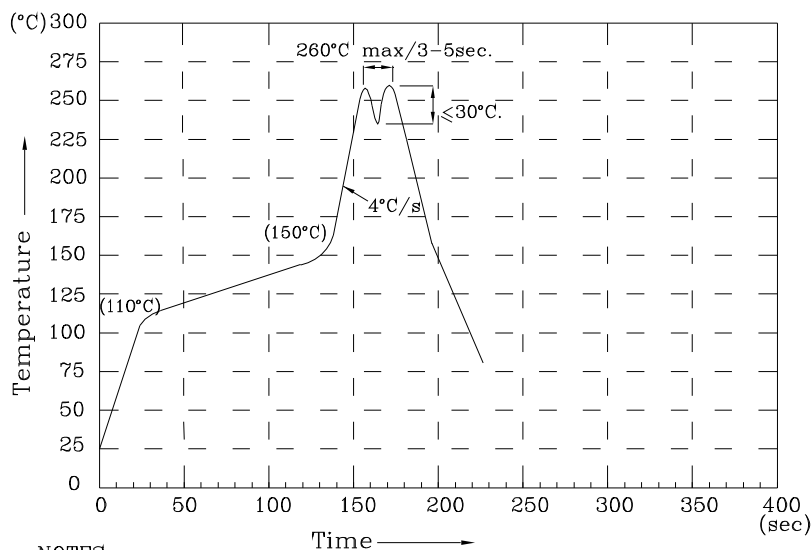

NOTES:

1. Recommend the wave temperature 245°C~260°C. The maximum soldering temperature should be less than 260°C.
2. Do not apply stress on epoxy resins when temperature is over 85 degree°C.
3. The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
4. No more than once.

Remarks:


If special sorting is required (e.g. binning based on forward voltage, Luminous intensity / luminous flux, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%
3. Forward Voltage: +/-0.1V


Note: Accuracy may depend on the sorting parameters.

PACKING & LABEL SPECIFICATIONS


DUY20C-A

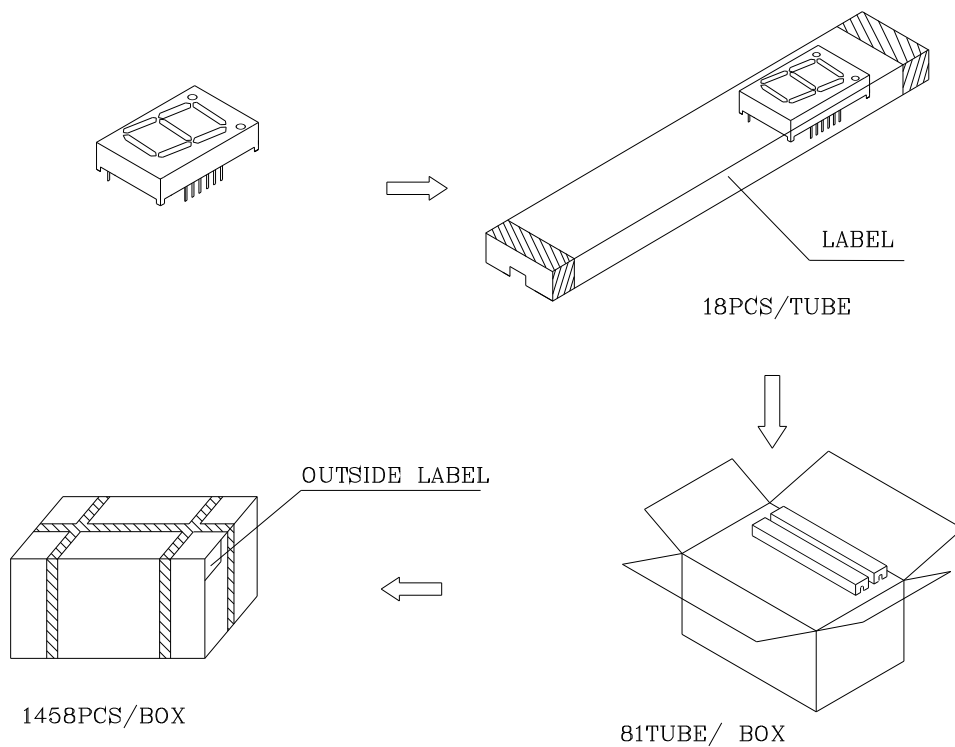

Inside LABEL Paste On The IC-tube

	PART NO: Dxx20x-A	Q.C.
	QTY: 18 PCS	CODE: xx
		
LOT NO. xxxxxxxxxxx-xxxx		Date Number OF FQC
RoHS Compliant		

Outside LABEL Paste On The Box

BOX Number	xxxx	xxxx	BIN CODE
			
Dxx20x-A	1458	XX	Number OF QA Date
			