


# Multi Control Devices sidejog Encoder and Push Operation Type Switch

SRBE Series



A compact multifunctional operating device that can utilize the side of the set.

Multi Control Devices

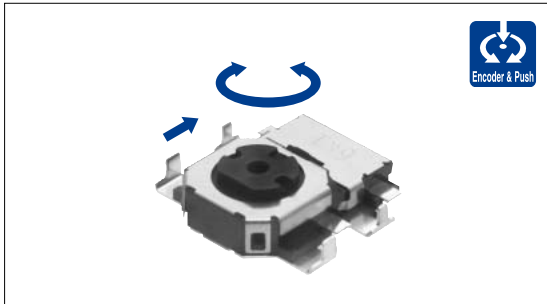

## Typical Specifications

Items		Specifications
Ratings( max. )( min. ) ( Resistive load )		1mA 5V DC / 50 $\mu$ A 3V DC
Output voltage	Jog portion	1V max. at 1mA 5V DC ( Resistive load )
	Push portion	
Operating force( Push portion )		3.5 $\pm$ 1.5N
Travel( Push operation )		0.2mm
Operating life	Jog portion	100,000cycles
	Push portion	

## Product Line


Number of detent	Number of pulse	Operating direction	Mounting method	Rotational torque ( Jog portion )	Minimum order unit( pcs. )	製品番号	Product No.
12	6	Horizontal	Standard	3 $\pm$ 2mN $\cdot$ m	6,000	SRBE110300	1
			Low-profile		5,200	SRBE210200	2

Variable Resistor Type

Switch Type

## Taping Specification (Taping Packaging)

Reel Size Unit:mm

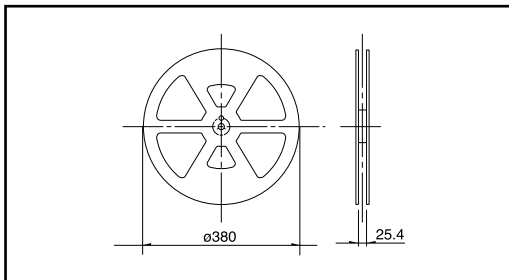

Product No.	Number of packages( pcs. )			Tape width ( mm )
	1 reel	1 case / Japan	1 case / export packing	
SRBE110300	1,500	3,000	6,000	24
SRBE210200	1,300	2,600	5,200	

## Note


Please place purchase orders per minimum order unit (integer).

**Dimensions**


Unit:mm

No	Style	PC board mounting hole dimensions (Viewed from direction A)
1		
2		

**Output Signal (Encoder)**

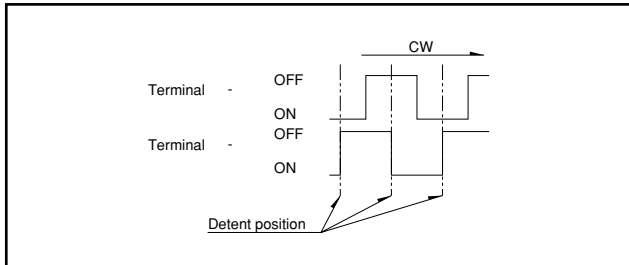

**Circuit Diagram**

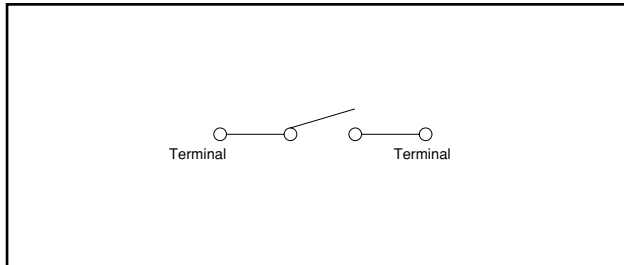










# List of Varieties

Multi Control Devices

Variable Resistor Type

Switch Type


Series		Switch type						
		SKQU			SSAF	SRBE	SLLB	SLLB5 Small type
Items	SKQUAA/SKQUBA	SKQUCA	SKQUDB					
	Photo							
Function								
Dimensions (typical value) (mm)	W	10			10.85	12	11.8	9.5
	D					11	11.4	8.8
	H	7.1	10	8.6	3	3.8	3	2.2
Outlined specifications	Number of operating shafts	Single-shaft						
	Shaft material	Resin						
	Directional resolution	4-direction			8-direction	-	2-direction	
	Directional operating feeling	With			Without	With	Without	
	Lever return mechanism	With				Without	With	
	Center-push switch	With/Without			With		With/Without	With
Encoder	Without				With		Without	
Operating temperature range		-30 to +85			-10 to +60			
Rating (max. ) Resistive load		50mA 12V DC			20mA 5V DC	1mA 5V DC	10mA 5V DC	
Electrical performance	Output voltage	—————			1V max. at 1mA 5V DC (Resistive load)			
	Directional resolution	4-direction			8-direction	-	2-direction	
	Insulation resistance	100M min. 100V DC			10M min. 100V DC	50M min. 50V DC	100M min. 100V DC	
	Voltage proof	250V AC for 1min.			100V AC for 1min.	50V AC for 1min.	100V AC for 1min.	
	Directional operating force	1.57 <sup>+0.49</sup> / <sub>-0.59</sub> N	1.57 <sup>+0.39</sup> / <sub>-0.69</sub> N		0.5N <sup>+0.5</sup> / <sub>-0.35</sub> N	—————	0.65 ± 0.3N	
Mechanical performance	Push operating force	—————	3.14 ± 0.59N		2.5 <sup>+0.7</sup> / <sub>-0.5</sub> N	3.5 ± 1.5N	2 ± 1N	2.5 ± 1N
	Encoder detent torque	—————				3 ± 2mN·m		—————
	Terminal strength	—————						3N for 1min.
	Actuator strength	—————			50N			
Endurance	Vibration	10 to 55 to 10Hz/min., the amplitude is 1.5mm for all the frequencies, in the 3 direction of X, Y and Z for 2 hours respectively						
	Operating life without load	—————						100,000cycles
	Operating life with load (at rated load)	—————						
Environmental performance	Cold	-30 ± 2 for 96h			-40 ± 2 for 96h		-20 ± 2 for 96h	
	Dry heat	80 ± 2 for 96h			85 ± 2 for 96h			
	Damp heat	60 ± 2, 90 to 95%RH for 96h			40 ± 2, 90 to 95%RH for 96h			
Soldering	Manual soldering	350 max. 3s max.			350 ± 10 4 <sup>+</sup> 0s	350 ± 5 3s max.		
	Dip soldering	260 max. 5s max. ( SKQUAA,CA )						
	Reflow soldering	Please see P.492 ( SKQUBA,DB )						
Page		482			484	486	488	490

Switch Type Multi Control Devices Soldering Conditions .....492  
 Switch Type Multi Control Devices Cautions .....493

## Soldering Conditions

### Example of Reflow Soldering Condition

1. Heating method: Double heating method with infrared heater.
2. Temperature measurement: Thermocouple 0.1 to 0.2 CA(K) or CC(T) at solder joints copper foil surface ) A heat resistive tape should be used to fix thermocouple.
3. Temperature profile

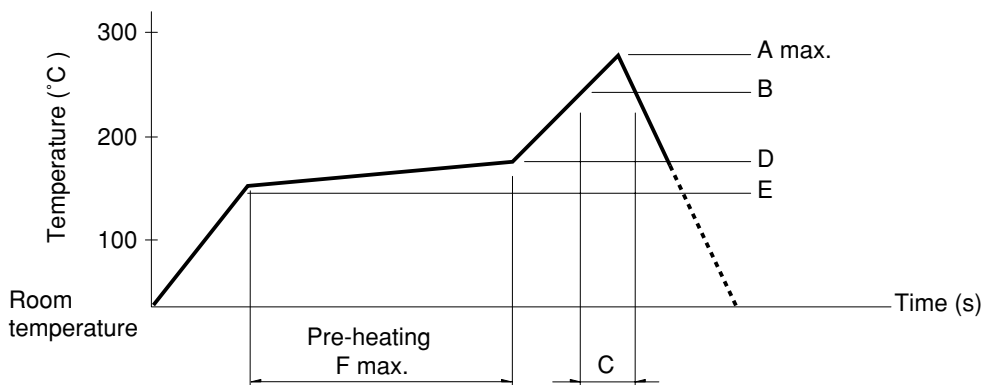

Series( Reflow type )	A( ) 3s max.	B( )	C(s)	D( )	E( )	F(s)
RKJXS	260	230	40	150	150	120
SLLB, SLLB5	240		20			
SKRV/SKRH/SKQUBA,DB/SSAF/SRBE	260		40	180		

### Notes

1. The above temperature shall be measured on the mounting surface of a PC board. There are cases where the PC board's temperature greatly differs from that of the switch, depending on the material, size thickness of PC boards and others. The above-stated conditions shall also apply to switch surface temperatures.
2. Soldering conditions differ depending on reflow soldering machines. Prior verification of soldering condition is highly recommended.