



Shanghai Lunsure Electronic
Technology Co.,Ltd
Tel:0086-21-37185008
Fax:0086-21-57152769

**GP15A
THRU
GP15M**

Features

- High temperature metallurgically bonded construction
- Glass passivated cavity-free junction, Plastic Case
- 1.5 amperes operation at $T_A=55^\circ\text{C}$ and with no thermal runaway.
- Typical k less than 0.1uA

Maximum Ratings

- Operating Temperature: -55°C to $+150^\circ\text{C}$
- Storage Temperature: -55°C to $+150^\circ\text{C}$
- Typical Thermal Resistance: $20^\circ\text{C}/\text{W}$ Junction to Lead


Part Number	Maximum Recurrent Peak Reverse Voltage	Maximum RMS Voltage	Maximum DC Blocking Voltage
GP15A	50V	35V	50V
GP15B	100V	70V	100V
GP15D	200V	140V	200V
GP15G	400V	280V	400V
GP15J	600V	420V	600V
GP15K	800V	560V	800V
GP15M	1000V	700V	1000V

Electrical Characteristics @ 25°C Unless Otherwise Specified

Maximum Average Forward Current	$I_{F(AV)}$	1.5 A	$T_A = 55^\circ\text{C}$
Peak Forward Surge Current	I_{FSM}	50A	8.3ms, half sine
Maximum Instantaneous Forward Voltage	V_F	1.1V	$I_{FM} = 1.5\text{A};$
Maximum DC Reverse Current At Rated DC Blocking Voltage	I_R	5.0uA 200uA	$T_A = 25^\circ\text{C}$ $T_A = 150^\circ\text{C}$
Typical Reverse Recovery Time	T_{rr}	2.0uS	$I_F=0.5\text{A}, I_R=1.0\text{A},$ $I_{rr}=0.25\text{A}$
Typical Junction Capacitance	C_J	15pF	Measured at 1.0MHz, $V_R=4.0\text{V}$

**1.5 Amp Glass Passivated Junction Rectifiers
50 to 1000 Volts**


DO-15

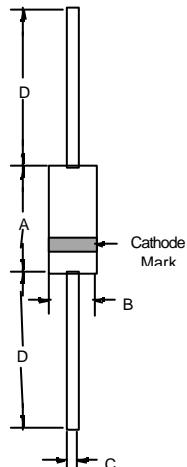

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.230	.300	5.80	7.60	
B	.104	.140	2.60	3.60	
C	.026	.034	.70	.90	
D	1.000	---	25.40	---	


GP15A thru GP15M

Figure 1
Typical Forward Characteristics

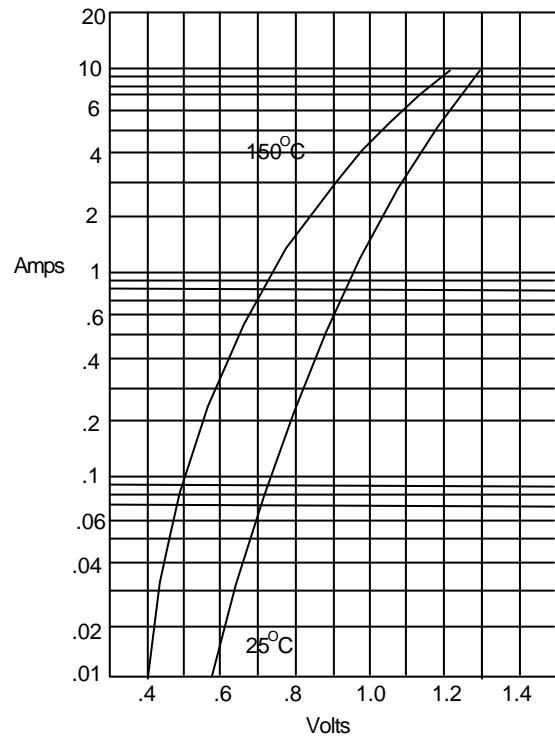


Instantaneous Forward Current - Amperes versus
Instantaneous Forward Voltage - Volts

Figure 2
Forward Derating Curve

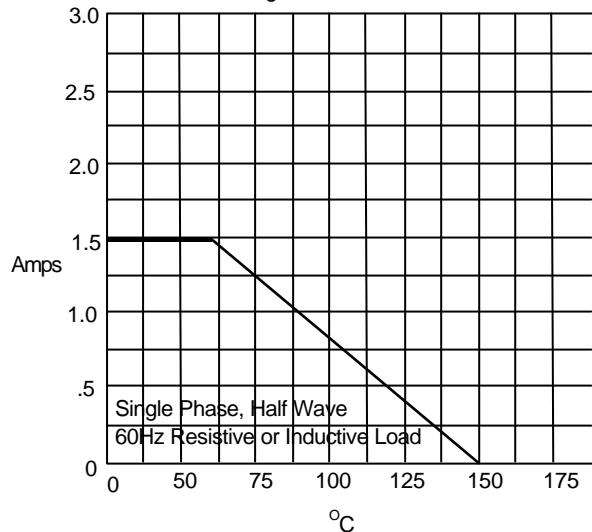

Average Forward Rectified Current - Amperes versus
Ambient Temperature - °C

Figure 3
Junction Capacitance

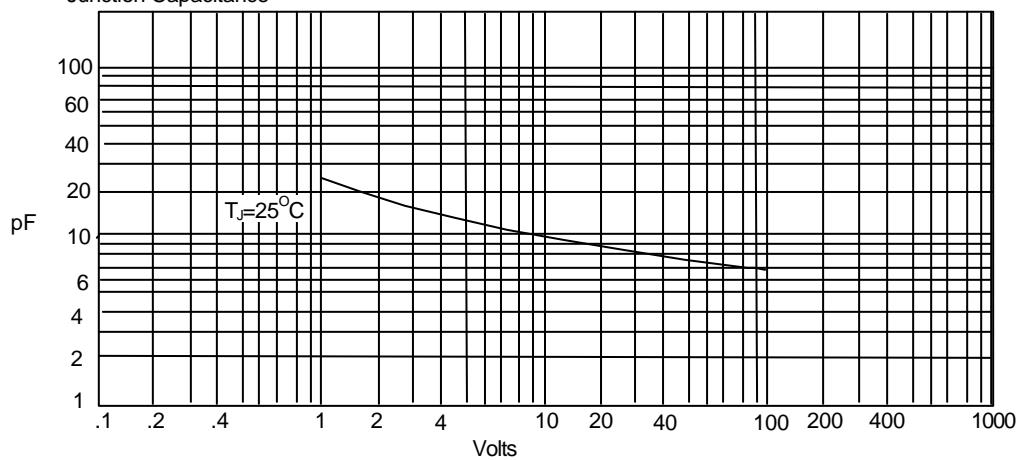


Junction Capacitance - pF versus
Reverse Voltage - Volts

GP15A thru GP15M



Figure 4
Maximum Non-Repetitive Forward Surge

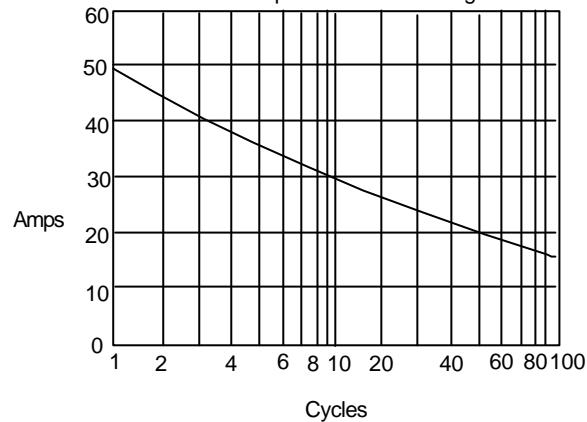

Peak Forward Surge Current - Amperes *versus*
Number Of Cycles At 60Hz - Cycles