

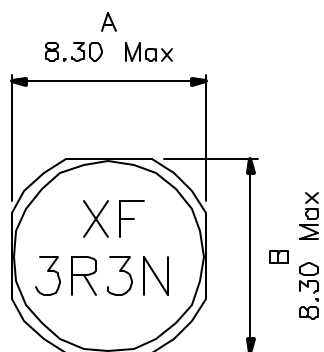



1. Mechanical Dimensions:



TOP VIEW




BOTTOM VIEW



PCB LAYOUT

2. Schematic:



3. Electrical Specification:

OCL: 3.3uH±30% @100KHz 0.1V
 DCR: 0.0182 Ohms Max
 Isat: 4.8Adc (OCL Drop 35% Typ)

Note:

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: -40°C to +85°C

DOC. REV. A/1

XFMRs Inc.	Title: INDUCTORS		
	UNLESS OTHERWISE SPECIFIED	P/N: XFTPRH8D28-3R3N	REV. A
	TOLERANCES: .xxx ±0.25	DWN. 廖玉坤	Nov-20-03
	Dimensions in mm	CHK. 李清儿	Nov-20-03
SHEET 1 OF 1	APP. MS	Nov-20-03	