

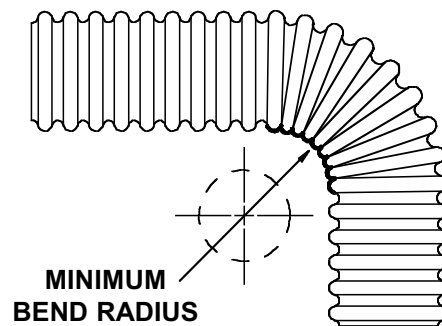


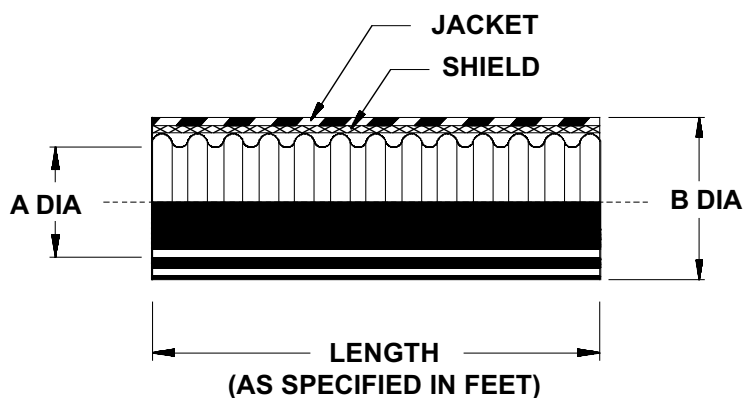

121-007
Type D Series 72 Annular Convulsed Tubing
Thermally Stabilized Kynar®

**TYPE
D
INTERNAL
TIN/COPPER
BRAID
EXTERNAL
JACKET**

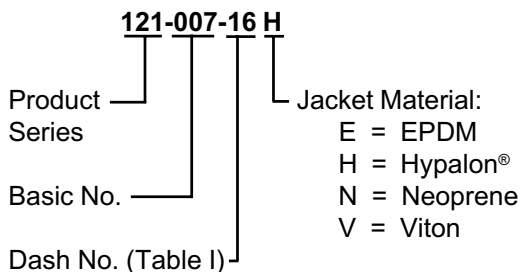

DASH NO.	A DIA		B DIA		MINIMUM BEND RADIUS
	MIN	MAX	MIN	MAX	
09	.24 (6.1)	.28 (7.1)	.54 (13.7)	.58 (14.7)	.75 (19.1)
12	.33 (8.4)	.37 (9.4)	.64 (16.3)	.68 (17.3)	1.00 (25.4)
16	.45 (11.4)	.50 (12.7)	.76 (19.3)	.82 (20.8)	1.38 (35.1)
20	.57 (14.5)	.62 (15.7)	.87 (22.1)	.93 (23.6)	1.69 (42.9)
24	.69 (17.5)	.75 (19.1)	1.04 (26.4)	1.10 (27.9)	1.88 (47.8)
28	.81 (20.6)	.87 (22.1)	1.16 (29.5)	1.24 (31.5)	2.00 (50.8)
32	.93 (23.6)	1.00 (25.4)	1.28 (32.5)	1.36 (34.5)	2.38 (60.5)
40	1.18 (30.0)	1.25 (31.8)	1.52 (38.6)	1.60 (40.6)	2.88 (73.2)

Metric dimensions (mm) are in parentheses.

Note: Tubing supplied in random lengths.
For specific size lengths, consult factory.