

**AUDIO**

- Competitively priced
- Industry Compatible
- Surface Mount


**SMT 3.5mm EARPHONE JACK**



**SPECIFICATION**

|                               |                         |
|-------------------------------|-------------------------|
| <b>Contact resistance:</b>    | 30mΩ max. (INITIAL)     |
| <b>Insulation resistance:</b> | 100mΩ min. AT 500V DC.  |
| <b>Withstanding voltage:</b>  | 500V AC for one minute  |
| <b>Soldering Heat:</b>        | 260±5°C for 5±1 seconds |
| <b>Insertion force:</b>       | 0.3-2.0 KG              |
| <b>Extraction force:</b>      | 0.3-2.0 KG              |
| <b>Lifetime:</b>              | 5,000 cycles min        |

**OUTLINE DRAWING**

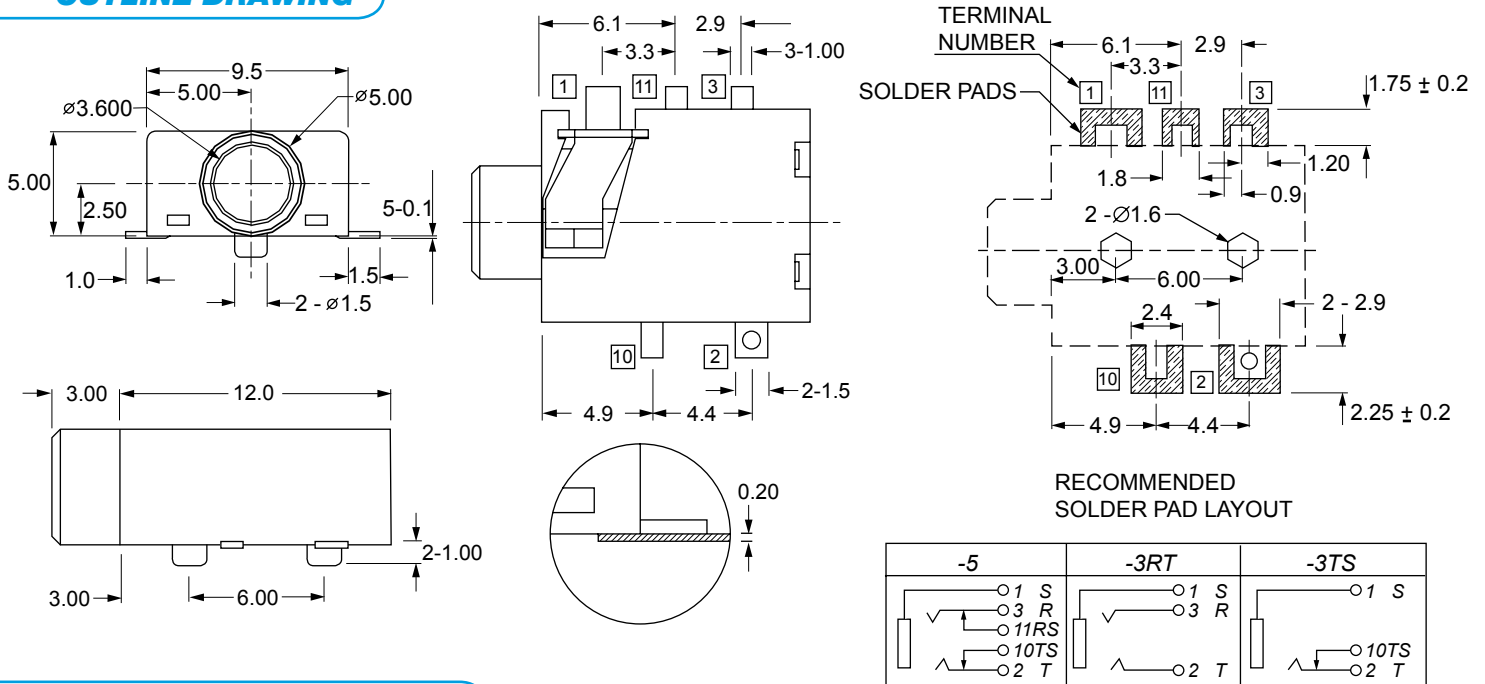

**ORDERING INFORMATION**

| DBC                 | EJ                    | 0381   | -3RT     |
|---------------------|-----------------------|--------|----------|
| Dubilier Connectors | 3.5mm Earphone Socket | Series | Contacts |
|                     |                       |        | -3RT     |
|                     |                       |        | -3TS     |
|                     |                       |        | -5       |