



# UNCONTROLLED DOCUMENT

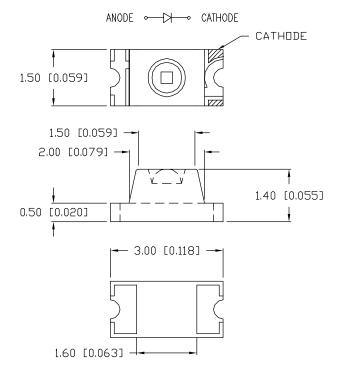

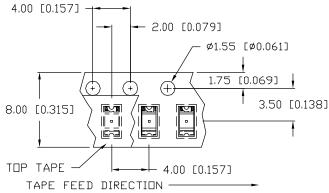





# RECOMMENDED SOLDER PAD LAYDUT 1.60 [0.063] 1.60 [0.055] (2 PLS.)

# PART NUMBER

SML-LXL1106GC-TR A

E.C.N. NUMBER AND REVISION COMMENTS DATE

E.C.N. #10967. 3.14.03

REV.

| ELECTRO-OPTICAL CHARACTERISTICS TA=25°C   I f= 20mA |       |       |     |          |              |
|---|-------|-------|-----|----------|--------------|
| PARAMETER   | MIN   | TYP   | MAX | UNITS    | TEST COND    |
| PEAK WAVELENGTH                                     |       | 565   |     | nm       | _            |
| FORWARD VOLTAGE                                     |       | 2.2   | 2.5 | ۷f       |              |
| REVERSE VOLTAGE                                     | 5.0   |       |     | ٧r       | Ir=100µA     |
| AXIAL INTENSITY                                     |       | 16    |     | mcd      | $I_f = 20mA$ |
| VIEWING ANGLE                                       |       | 90    |     | 2x theta |              |
| EMITTED COLOR:                                      | GREEN |       |     |          |              |
| EPOXY LENS FINISH:                                  | WATER | CLEAR |     |          |              |

### LIMITS OF SAFE OPERATION AT 25°C

| PARAMETER             | MAX          | UNITS      |
|-----------------------|--------------|------------|
| PEAK FORWARD CURRENT* | 150          | mA         |
| STEADY CURRENT        | 25           | mA         |
| POWER DISSIPATION     | 105          | mW         |
| DERATE FROM 25°C      | -1.2         | mW/′C      |
| OPERATING TEMP.       | -30  TO  +85 | °C         |
| STORAGE TEMP.         | -40  TO  +85 | <b>°</b> C |
| * t<10µS              |              |            |

## NOTES:

1. THE POLARITY MARK IS ORIENTED TOWARDS THE TAPE SPROCKET HOLE.

CAUTION: STATIC SENSITIVE DEVICE
FOLLOW PROPER E.S.D. HANDLING PROCEDURES
WHEN WORKING WITH THIS PART.

CAUTION: MOISTURE SENSITIVE DEVICE
PER JEDEC LEVEL 4 STANDARDS

\*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.01D), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +DECIMAL PRECISION MAX.= +0.00 -0.00 MAX.= +0.00 -0.00 MAX.= +0.00 -0.00 MAX.= +0.00 -0.00 MAX.= +0.00 M

A SML-LXL1106GC-TR

3mm x 1.5mm SURFACE MOUNT LED WITH LENS, 565nm GREEN LED, WATER CLEAR LENS, TAPE AND REEL. CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OF IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

RELIABILITY NOTE

OUR MANY YEARS OF EXPERIENCE DATA ACCUMULATION INDICATE THAT

SOLDER HEAT IS A MAJOR CAUSE OF EARLY AND FUTURE FAILURE.

PLEASE PAY ATTENTION TO YOUR SOLDERING PROCESS.



290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 US WEB: www.lumex.com TW WEB: www.lumex.com.tw

DRAWN BY:

CHECKED BY: APP

APPROVED BY: DATE:

DATE: 8.21.01 PAGE: 1 OF 1

SCALE: N/A

CT