



CHENMKO ENTERPRISE CO.,LTD

Lead free devices

**SURFACE MOUNT
PNP Digital Silicon Transistor**

VOLTAGE 50 Volts CURRENT 100 mAmpere

CHDTA124TKPT

APPLICATION

- * Switching circuit, Inverter, Interface circuit, Driver circuit.

FEATURE

- * Small surface mounting type. (SC-59/SOT-346)
- * High current gain.
- * Suitable for high packing density.
- * Low collector-emitter saturation.
- * High saturation current capability.
- * Internal isolated PNP transistors in one package.
- * Built in bias resistor($R_1=22\text{k}\Omega$, Typ.)


CONSTRUCTION

- * One PNP transistors and bias of thin-film resistors in one package.


MARKING

TK4

CIRCUIT



SC-59/SOT-346



Dimensions in millimeters

SC-59/SOT-346

LIMITING VALUES

In accordance with the Absolute Maximum Rating System .

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-Base voltage		-50	V
V_{CEO}	Collector-Emitter voltage		-50	V
V_{EBO}	Emitter-Base voltage		-5	V
I_c	Collector current		-100	mA
P_c	Collector Power dissipation	$T_{amb} \leq 25^\circ\text{C}$, Note 1	200	mW
T_{STG}	Storage temperature		-55 +150	°C
T_J	Junction temperature		-55 +150	°C
$R_{\theta J-S}$	Thermal resistance , Note 1	junction - soldering point	140	°C/W

Note

1. Transistor mounted on an FR4 printed-circuit board.

RATING CHARACTERISTIC (CHDTA124TKPT)

CHARACTERISTICS

$T_{amb} = 25^{\circ}\text{C}$ unless otherwise specified.

SYMBOL	PARAMETER	CONDITIONS	MIN.	TYP.	MAX.	UNIT
BVCBO	Collector-Base breakdown voltage	$I_C = -50\mu\text{A}$	-50.0	-	-	V
BVCEO	Collector-Emitter breakdown voltage	$I_C = -1\text{mA}$	-50.0	-	-	V
BVEBO	Emitter-Base breakdown voltage	$I_E = -50\mu\text{A}$	-5.0	-	-	V
VCE(sat)	Collector-Emitter Saturation voltage	$I_C = -10\text{mA}; I_B = -1\text{mA}$	-	-	-0.3	V
I_{CBO}	Collector-Base current	$V_{CB} = -50\text{V}$	-	-	-0.5	μA
I_{EBO}	Emitter-Base current	$V_{EB} = -4\text{V}$	-	-	-0.5	μA
h_{FE}	DC current gain	$I_C = -1\text{mA}; V_{CE} = -5.0\text{V}$	100	250	600	
R_1	Input resistor		15.4	22	26.6	$\text{k}\Omega$
f_T	Transition frequency	$I_E = 5\text{mA}, V_{CE} = -10.0\text{V}$ $f = 100\text{MHz}$	-	250	-	MHz

Note

1. Pulse test: $t_p \leq 300\mu\text{s}$; $\delta \leq 0.02$.

RATING CHARACTERISTIC CURVES (CHDTA124TKPT)

Typical Electrical Characteristics

Fig.1 DC current gain vs. collector current

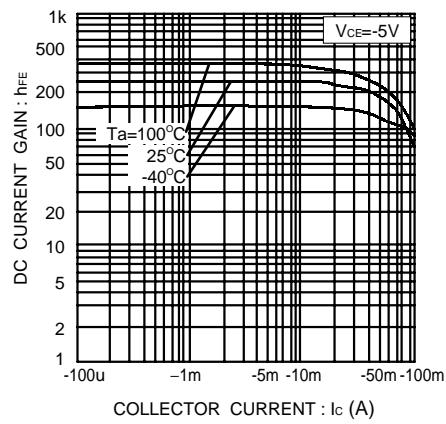


Fig.2 Collector-emitter saturation voltage vs. collector current

