

SPECIFICATION FOR COTCO LED LAMP

MODEL No : LC503TYL1-15Q-MT
DOC. No : A 01Aug03

Description:

15 Degree 5mm LED Lamp in Amber
Color with Water Transparent Lens
and No Stopper

*This specification is only for Marktech
Dice Material: AlGaInP

Confirmed
by Customer: _____

Date: _____

COTCO LUMINANT DEVICE (HUIZHOU) LTD.

Applications:

- Advertising Signs
- Indicators
- Traffic
- Automotive Lighting

Absolute Maximum Ratings at Ta = 25°C

Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I_F	50	mA
Peak Forward Current*	I_{FP}	200	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	150	mW
Operation Temperature	T_{opr}	-40 ~ + 95	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T_{sol}	Max.260°C for 5 sec Max. (3mm from the base of the epoxy bulb)	

*pulse width ≤ 0.1 msec duty $\leq 1/10$

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 20$ mA	---	2.1	2.6	V
Reverse Current	I_R	$V_R = 5$ V	---	---	100	μ A
Dominant Wavelength	λ_D	$I_F = 20$ mA	584	591	596	nm
Luminous Intensity	I_V	$I_F = 20$ mA	4180	6000	---	mcd
50% Power Angle	$2\theta_{1/2}$	$I_F = 20$ mA	---	15	---	deg

Ranks Combination ($I_F = 20$ mA)

Rank	X	Y	Z
Luminous Intensity	4180-5860 mcd	5860-8200 mcd	8200-12000 mcd


Rank	X2	X3	X4	X5
Dominant Wavelength	584-587 nm	587-590 nm	590-593 nm	593-596 nm

Rank	V1	V2	V3	V4	V5
Voltage	1.6-1.8V	1.8-2.0V	2.0-2.2V	2.2-2.4V	2.4-2.6V

Important Notes:

- 1) All ranks will be included per delivery, rank ratio will be determined by Cotco.
- 2) Tolerance of measurement of luminous intensity is $\pm 15\%$.
- 3) Tolerance of measurement of dominant wavelength is ± 1 nm.
- 4) Tolerance of measurement of Vf is ± 0.05 V.
- 5) Packaging methods are available for selection, please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.

Dimension Drawing

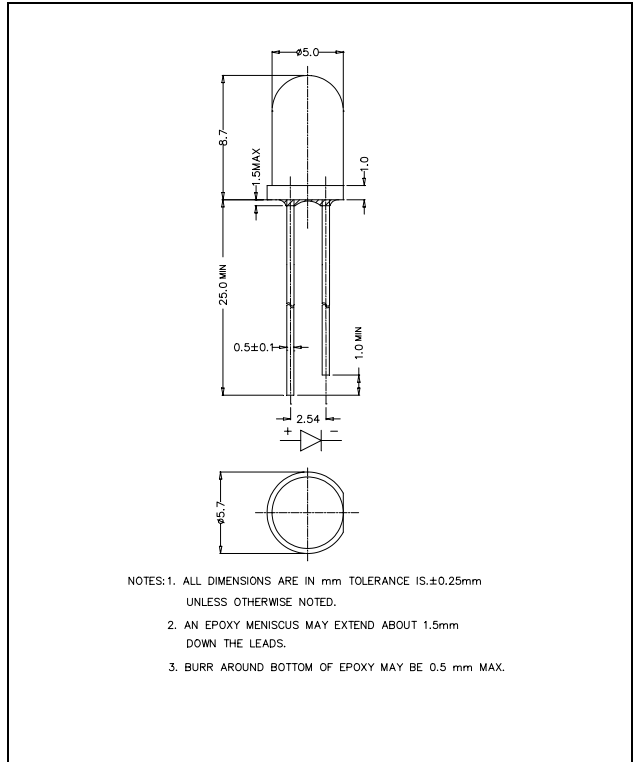

Graphs

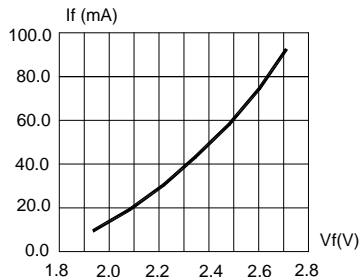


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

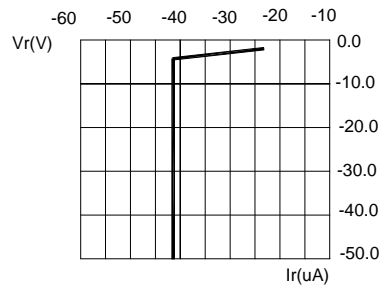


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.

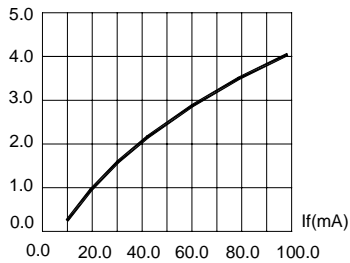


FIG.3 RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT.

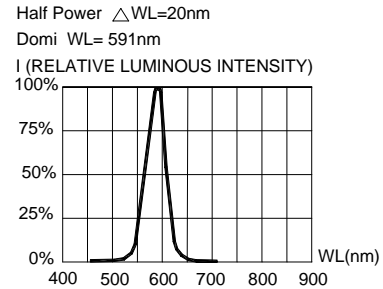


FIG.4 RELATIVE LUMINOUS INTENSITY VS. WAVELENGTH.

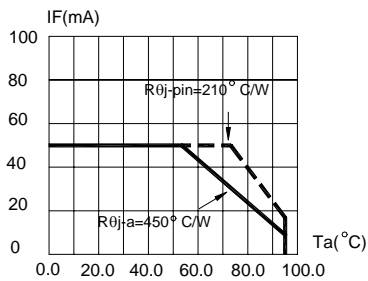


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE. ($T_{jmax}=105^{\circ}C$)

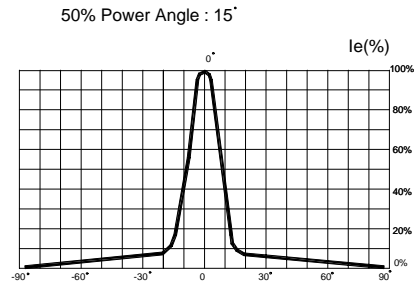


FIG.6 FAR FIELD PATTERN

1. Cathode PAD Area (0.18 X 0.18inch²)
2. Height above nominal seating plane in inches(0.3inch)

Items	Signatures	Date	Revision History	
Prepared by	LiuZM	2003/08/01	DOC. No.	CHANGE DESCRIPTION
Checked by	ZouGR	2003/08/01		
Approved by	David	2003/08/01		
ECN#	ECN-H20030258			

Data is subject to change without prior notice.

Copyright©2002 Cotco International Ltd.

Obsoletes Doc: ---