



### 1. Mechanical Dimensions:

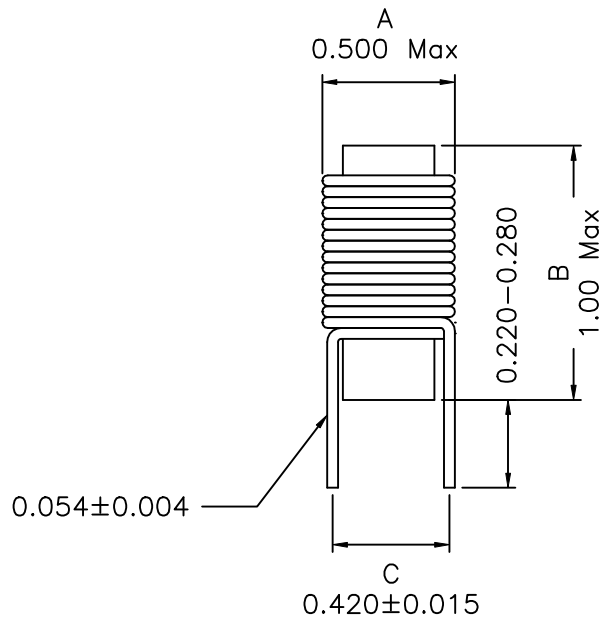

**Note:**

1. Solderability: Leads shall meet MIL-STD-202, Method 208D for solderability.
2. Flammability: UL94V-0,
3. ASTM oxygen index: > 28% ,
4. Temperature rating: 155°C. UL file E151556,
5. Operating Temperature Range: All listed parameters are to be within tolerance from -40°C to +85°C

### 2. Schematic:



### 3. Electrical Specifications: @25°C

OCL: 3.3uH ±15% @15.75KHz, 0.1V  
 DCR: 0.005 Ohms Max  
 ISAT: 10.0A  
 Irms: 10.0A  
 ΔT: 40°C rise typ. at Irms (85°C ambient)  
 Inductance drop =10% typ. at Isat.

DOC. REV: A/1

<b>XFMRs Inc</b>		Title: POWER CHOKES		
UNLESS OTHERWISE SPECIFIED TOLERANCES: N/A Dimensions in INCH	P/N: XFRLVO-332		REV. A	
	DWN.	廖玉坤	Oct-13-03	
	CHK.	李清儿	Oct-13-03	
	APP.	BW	Oct-13-03	