

EPA3892GE




- UL 94V-0 Recognized Components •
- UL 1446 Class B Insulation System •
- Designed for High Current, Low Voltage DC/DC Converter Applications •
- Low cost Robust construction to withstand most SMT processes •
- Operating Temperature : -40°C to +85°C •
- Also suitable for High Frequency Filtering Applications •

Primary Specification


Inductance ($\mu\text{H} \pm 20\%$) @ 100 KHz, 0.1 Vrms	DCR (m Ω Max.)
10	26

SRF (MHz)	Isat (Amps)	Irms (Amps) @ $\Delta T = 40^\circ\text{C}$ Typ.
28	10	6

Typical L vs Current

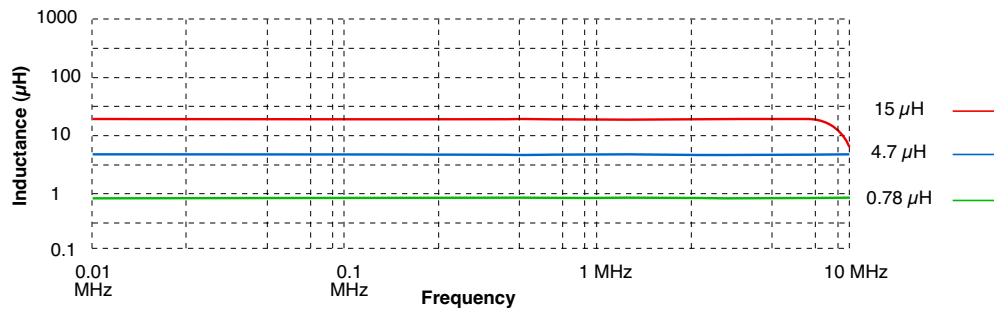

Package

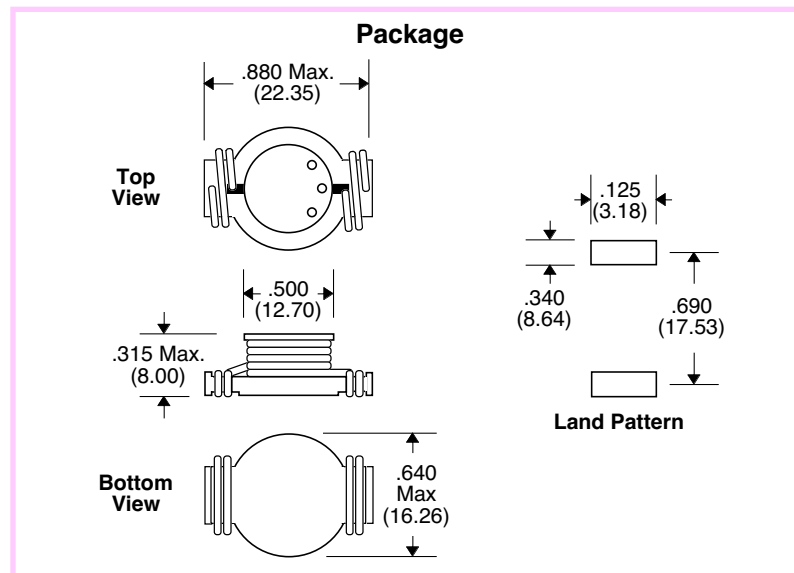

Unless Otherwise Specified Dimensions are in Inches /mm $\pm .010 / .25$