


2-Way Power Divider

P/N: JXWBGF-T-2-4000-6000

Frequency Range(GHz)	4-6
Insertion Loss(dB)	0.8 max
Isolation(dB)	20 min
VSWR	1.3:1 max
Phase Balance(°)	3
Amplitude Balance(dB)	0.3 max
Impedance(Ohm)	50
Power Handling(W)	5 CW (output VSWR<1.5)
Input Connector	N-Female
Output Connector	N-Female
Operating Temperature(°C)	-55 ~ +85
Storage Temperature(°C)	-60 ~ +90

Outline Drawing (Size: mm)

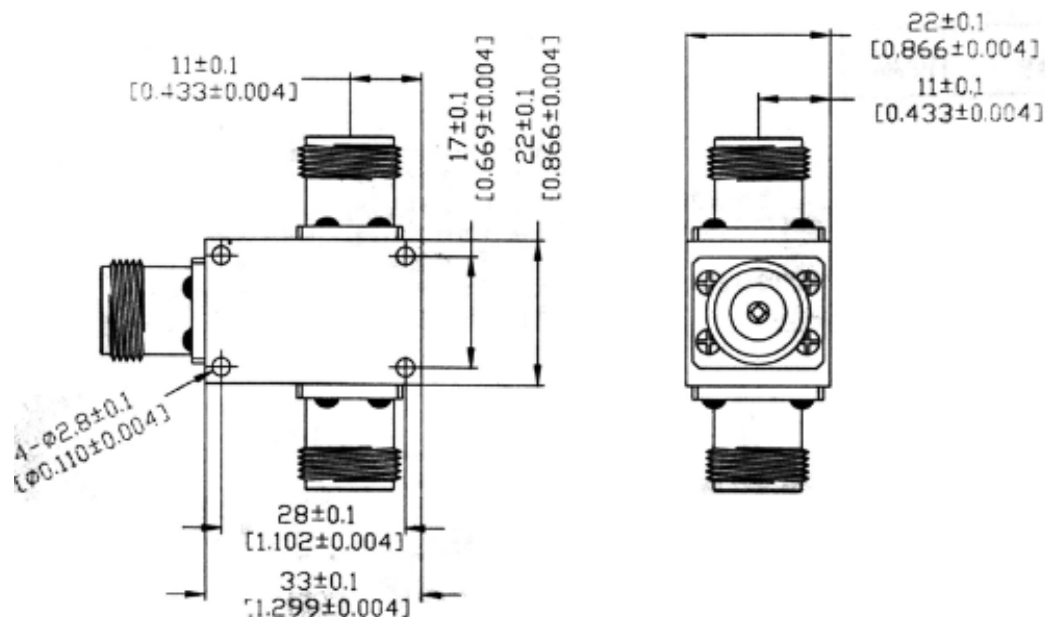

For current data sheets, please contact: sales@aacix.com