



Micro Commercial Components

Micro Commercial Components  
 20736 Marilla Street Chatsworth  
 CA 91311  
 Phone: (818) 701-4933  
 Fax: (818) 701-4939

# MMST3906

## Features

- Epitaxial Planar Die Construction
- Complementary NPN Type available (MMST3904)
- Ultra-small surface mount package
- Marking : K5N
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0 and MSL Rating 1

## PNP Small Signal Transistors

## Maximum Ratings

Symbol	Rating	Rating	Unit
$V_{CEO}$	Collector-Emitter Voltage	40	V
$V_{CBO}$	Collector-Base Voltage	40	V
$V_{EBO}$	Emitter-Base Voltage	5.0	V
$I_C$	Collector Current-Continuous <sup>(1)</sup>	200	mA
$P_C$	Power dissipation <sup>(1)</sup>	200	mW
$T_J$	Junction Temperature	-55 to +150	°C
$T_{STG}$	Storage Temperature	-55 to +150	°C

## Electrical Characteristics @ 25°C Unless Otherwise Specified

Symbol	Parameter	Min	Max	Units
--------	-----------	-----	-----	-------

### OFF CHARACTERISTICS <sup>(2)</sup>


$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage ( $I_C=1.0mA$ , $I_B=0$ )	40	---	Vdc
$V_{(BR)CBO}$	Collector-Base Breakdown Voltage ( $I_C=10\mu A$ , $I_E=0$ )	40	---	Vdc
$V_{(BR)EBO}$	Collector-Emitter Breakdown Voltage ( $I_C=10\mu A$ , $I_C=0$ )	5.0	---	Vdc
$I_{CEX}$	Collector-Base Cutoff Current ( $V_{CE}=30Vdc$ , $V_{EB(OFF)}=3.0Vdc$ )	---	50	nAdc
$I_{BL}$	Emitter-Base Cutoff Current ( $V_{CE}=30Vdc$ , $V_{EB(OFF)}=3.0Vdc$ )	---	50	nAdc

### ON CHARACTERISTICS <sup>(2)</sup>

$h_{FE}$	DC Current Gain ( $I_C=100\mu A$ , $V_{CE}=1.0Vdc$ ) ( $I_C=1.0mA$ , $V_{CE}=1.0Vdc$ ) ( $I_C=10mA$ , $V_{CE}=1.0Vdc$ ) ( $I_C=50mA$ , $V_{CE}=1.0Vdc$ ) ( $I_C=500mA$ , $V_{CE}=1.0Vdc$ )	60 80 100 60 30	---	---	---
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage ( $I_C=10mA$ , $I_B=1.0mA$ ) ( $I_C=50mA$ , $I_B=5.0mA$ )	---	0.20 0.30	Vdc	
$V_{BE(sat)}$	Base-Emitter Saturation Voltage ( $I_C=10mA$ , $I_B=1.0mA$ ) ( $I_C=50mA$ , $I_B=5.0mA$ )	0.65 ---	0.85 0.95	Vdc	

Note: 1. Valid provided that terminals are kept at ambient temperature.  
 2. Pulse test: Pulse width<300us, duty cycle<2%


## SOT-323

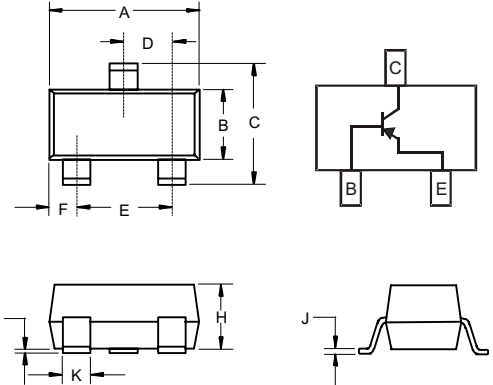

### DIMENSIONS

DIM	INCHES		MM		NOTE
	MIN	MAX	MIN	MAX	
A	.071	.087	1.80	2.20	
B	.045	.053	1.15	1.35	
C	.079	.087	2.00	2.20	
D	.026 Nominal		0.65Nominal		
E	.047	.055	1.20	1.40	
F	.012	.016	.30	.40	
G	.000	.004	.000	.100	
H	.035	.039	.90	1.00	
J	.004	.010	.100	.250	
K	.012	.016	.30	.40	

### Suggested Solder Pad Layout



**SMALL SIGNAL CHARACTERISTICS**

$C_{obo}$	Output Capacitance ( $V_{CB}=5.0Vdc$ , $f=1.0MHz$ , $I_E=0$ )	---	4.5	pF	
$C_{ibo}$	Input Capacitance ( $V_{EB}=0.5Vdc$ , $f=1.0MHz$ , $I_C=0$ )	---	10	pF	
$h_{ie}$	Input Impedance	$V_{CE}=10Vdc$ , $I_C=1.0mA$ , $f=1.0KHz$	2.0	12	kohms
$h_{re}$	Voltage Feedback Ratio		0.1	10	$\times 10^{-4}$
$h_{fe}$	Small Signal Current Gain		100	400	---
$h_{oe}$	Output Admittance		3.0	60	$\mu S$
$f_T$	Current Gain-Bandwidth Product ( $V_{CE}=20Vdc$ , $I_C=10mA$ , $f=100MHz$ )	300	---	MHz	
NF	Noise Figure ( $V_{CE}=5.0Vdc$ , $I_C=100\mu A$ , $R_S=1.0KOHMS$ , $f=1.0KHz$ )	---	4.0	dB	

**SWITCHING CHARACTERISTICS**

$t_d$	Delay Time	$V_{CC}=3.0Vdc$ , $I_C=10mA$ ,	---	35	ns
$t_r$	Rise Time	$V_{BE(off)}=0.5Vdc$ , $I_{B1}=1.0mA$	---	35	ns
$t_s$	Storage Time	$V_{CC}=3.0Vdc$ , $I_C=10mA$ ,	---	225	ns
$t_f$	Fall Time	$I_{B1}=I_{B2}=1.0mA$	---	75	ns



Micro Commercial Components

## Ordering Information

Device	Packing
(Part Number)-TP	Tape&Reel;3Kpcs/Reel

**\*\*\*IMPORTANT NOTICE\*\*\***

*Micro Commercial Components Corp* . reserves the right to make changes without further notice to any product herein to make corrections, modifications , enhancements , improvements , or other changes .  
*Micro Commercial Components Corp* . does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights ,nor the rights of others . The user of products in such applications shall assume all risks of such use and will agree to hold *Micro Commercial Components Corp* . and all the companies whose products are represented on our website, harmless against all damages.

**\*\*\*APPLICATIONS DISCLAIMER\*\*\***

Products offer by *Micro Commercial Components Corp* . are not intended for use in Medical, Aerospace or Military Applications.