



1. CONFIGURATION & DIMENSIONS :

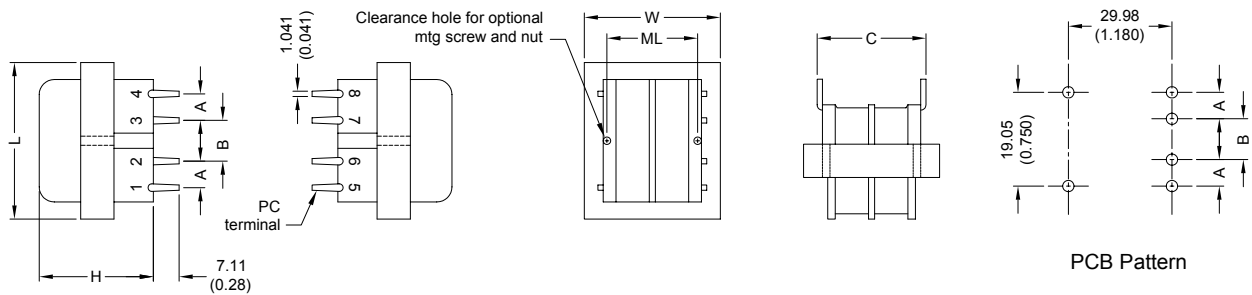

UNIT : mm (inch)

SIZE	VA	L	W	H	ML	A	B	C	Optional mtg. screw & nut*	gram
2	1.1	35.50 (1.40)	30.00 (1.180)	24.00 (0.95)	----	6.35 (.250)	6.35 (.250)	30.48 (1.200)	None	70

2. SCHEMATIC :



" . " indicates polarity

3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|---|
| a. Primary Voltage | AC 115 V 60 Hz . |
| b. No Load Primary Current | Less Than 10mA . |
| c. Secondary Voltage (±5%) | Series AC 19.60V .
Parallel AC 9.80V . |
| d. Secondary Load Current | Series 0.09A .
Parallel 0.18A . |
| e. Full Load Primary Current | Less Than 20mA . |
| f. Full Load Secondary Voltage (±5%) | Series 12.60V .
Parallel 6.30V . |
| g. DC Resistance | |
| Pin 1-4 | Primary = 1338 Ohm . |
| Pin 5-6 | Secondary = 15.90 Ohm . |
| Pin 7-8 | = 20.90 Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 2500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | EI-35 x 7.00 m/m . |



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

15.01.2008



SUPERWORLD ELECTRONICS (S) PTE LTD