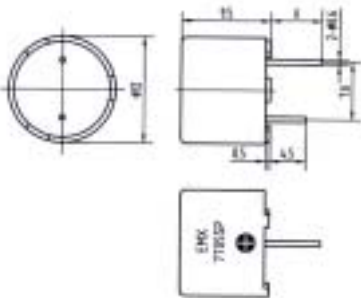
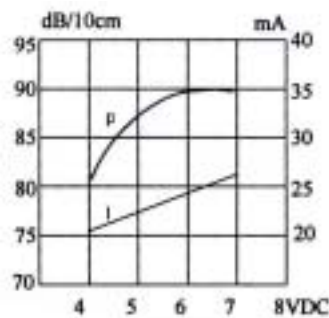


**Magnetic Buzzer****EMX- 7T05SP****FEATURES:**

- Low Frequency
- Low Voltage
- Small and Slim Size

**APPLICATIONS:**

- Automatic Control Equipment
- Communication Equipment
- Electronic Instruments

**DIMENSIONS: (Unit: mm)****CHARACTERISTICS:****ELECTRICAL SPECIFICATIONS:**

Min. Sound Pressure Level at 5V <sub>DC</sub> /10cm.....	85dB(A)
Rated Voltage.....	5V <sub>DC</sub>
Operating Voltage.....	4~6.5V <sub>DC</sub>
Max. Consumption .....	30mA/5V <sub>DC</sub>
Resonant Frequency .....	2300±300Hz
Max. Response Time .....	50ms
Operating Temperature.....	-40~+85°C
Storage Temperature.....	-40~+85°C
Weight.....	2g

**PACKING INFORMATION:**

Packing: 3000 pcs per export carton  
 Carton Size: 47 × 30.5 × 25cm  
 G. Weight: 7.5kgs N. Weight: 6kgs  
 Address: No. 12. Lane 722. Sangtian Road Jiangdong Science Garden  
 Ningbo, 315040 P. R. China  
 Fax No: (0574)87803761 Tel: (0574)87802511

