


# PCI-1710/L PCI-1710HG/HGL

100 kS/s, 12-bit, 16-ch PCI  
Multifunction Card

100 kS/s, 12-bit, 16-ch PCI  
Multifunction Card with High Gain

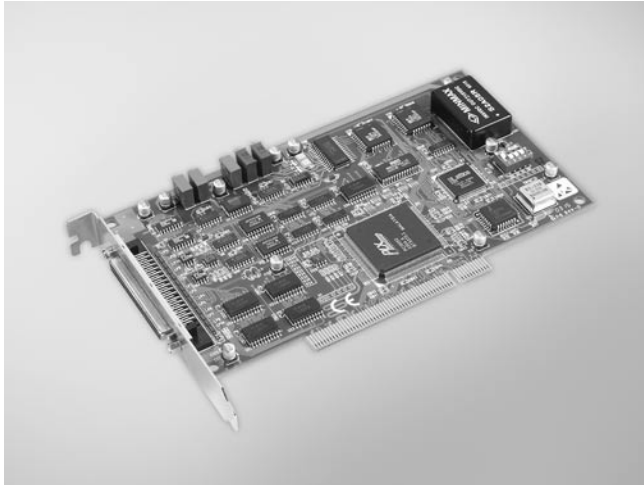

## Features

- 16-ch single-ended or 8-ch differential or a combination of analog input
- 12-bit A/D converter, with up to 100 kHz sampling rate
- Programmable gain
- Automatic channel/gain scanning
- Onboard FIFO memory (4,096 samples)
- Two 12-bit analog output channels (PCI-1710/1710HG only)
- 16-ch digital input and 16-ch digital output
- Onboard programmable counter
- BoardID™ switch

## Introduction

The PCI-1710 Series are multifunction cards for the PCI bus. Their advanced circuit design provides higher quality and more functions, including the five most desired measurement and control functions: 12-bit A/D conversion, D/A conversion, digital input, digital output, and counter/timer.

## Specifications

### Analog Input

- **Channels** 16 single-ended/ 8 differential (software programmable)
- **Resolution** 12 bits
- **FIFO Size** 4,096 samples
- **Overvoltage Protection** 30Vp-p
- **Input Impedance** 1 GΩ
- **Sampling Modes** Software, onboard programmable pacer and external
- **Input Range** (V, software programmable)

PCI-1710/1710L					
Gain	0.5	1	2	4	8
<b>Bipolar</b>	±10	±5	±2.5	±1.25	±0.625
<b>Unipolar</b>	N/A	0 ~ 10	0 ~ 5	0 ~ 2.5	0 ~ 1.25
<b>Accuracy</b> (% of FSR ±1LSB)	0.1	0.1	0.2	0.2	0.4

PCI-1710HG/1710HGL								
Gain	0.5	1	5	10	50	100	500	1000
<b>Bipolar</b>	±10	±5	±1	±0.5	±0.1	±0.05	±0.01	±0.005
<b>Unipolar</b>	N/A	0 ~ 10	N/A	0 ~ 1	N/A	0 ~ 0.1	N/A	0 ~ 0.01
<b>Accuracy</b> (% of FSR ±1LSB)	0.1	0.1	0.2	0.2	0.4	0.4	0.8	0.8

- **Maximum Sampling Rate** (S/s, depending on PGIA setting time)

Model	Gain	Max. Sampling Rate
PCI-1710/1710L	0.5, 1, 2, 4, 8	100 kS/s
PCI-1710HG/1710HGL	0.5, 1	100 kS/s
	5, 10	35 kS/s
	20, 100	7 kS/s
	500, 1000	770 S/s

### Analog Output (PCI-1710/1710HG only)

- **Channels** 2
- **Resolution** 12 bits
- **Output Rate** Static update
- **Output Range** (V, software programmable)

Internal Reference	Unipolar	0 ~ +5 0 ~ +10 V
<b>External Reference</b>		0 ~ +x V @ -x V (-10 ≤ x ≤ 10)

- **Slew Rate** 10 V/μs
- **Driving Capability** 3 mA
- **Operation Mode** Software polling
- **Accuracy** INLE: ±1 LSB, DNLE: ±1 LSB

### Digital Input

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Input Voltage** Logic 0: 0.8 V max.  
Logic 1: 2.0 V min.

### Digital Output

- **Channels** 16
- **Compatibility** 5 V/TTL
- **Output Voltage** Logic 0: 0.4 V max.  
Logic 1: 2.4 V min.
- **Output Capability** Sink: 8.0 mA @ 0.8 V  
Source: -0.4 mA @ 2.0 V

### Pacer/Counter

- **Channels** 1
- **Resolution** 16 bits
- **Compatibility** 5 V/TTL
- **Max. Input Frequency** 1 MHz

## Specifications Continued

### General

- **Bus Type** PCI V2.2
- **I/O Connector** 1 x 68-pin SCSI female connector
- **Dimensions (L x H)** 175 x 100 mm (6.9" x 3.9")
- **Power Consumption** Typical: 5 V @ 850 mA  
Max: 5 V @ 1.0 A
- **Operating Temperature** 0 ~ 60° C (32 ~ 140° F) (refer to IEC 68-2-1, 2)
- **Storage Temperature** -20 ~ 70° C (-4 ~ 158° F)
- **Storage Humidity** 5 ~ 95% RH non-condensing (refer to IEC 68-2-3)

## Ordering Information

- **PCI-1710** 100 kS/s, 12-bit Multifunction Card
- **PCI-1710L** 100 kS/s, 12-bit Multifunction Card w/o AO
- **PCI-1710HG** 100 kS/s, 12-bit High-gain Multifunction Card
- **PCI-1710HGL** 100 kS/s, 12-bit High-gain Multi. Card w/o AO
- **PCLD-8710** DIN-rail Wiring Board w/ CJC
- **PCL-10168-1** 68-pin SCSI Shielded Cable, 1 m
- **PCL-10168-2** 68-pin SCSI Shielded Cable, 2 m
- **ADAM-3968** 68-pin DIN-rail SCSI Wiring Board

## Pin Assignments

A10	68	34	AI1
A12	67	33	AI3
A14	66	32	AI5
A16	65	31	AI7
A18	64	30	AI9
A10	63	29	AI11
A12	62	28	AI13
A14	61	27	AI15
AIGND	60	26	AIGND
*AO0_REF	59	25	AO1_REF*
*AO0_OUT	58	24	AO1_OUT*
AOGND	57	23	AOGND
DI0	56	22	DI1
DI2	55	21	DI3
DI4	54	20	DI5
DI6	53	19	DI7
DI8	52	18	DI9
DI10	51	17	DI11
DI12	50	16	DI13
DI14	49	15	DI15
DGND	48	14	DGND
DO0	47	13	DO1
DO2	46	12	DO3
DO4	45	11	DO5
DO6	44	10	DO7
DO8	43	9	DO9
DO10	42	8	DO11
DO12	41	7	DO13
DO14	40	6	DO15
DGND	39	5	DGND
CNT0_CLK	38	4	PACER_OUT
CNT0_OUT	37	3	TRG_GATE
CNT0_GATE	36	2	EXT_TRG
+12V	35	1	+5V

\*: Pins 23~25 and pins 57~59 are not defined for PCI-1710L/1710HGL