



TSD1664

Low Frequency NPN Transistor



Pin assignment:
 1. Base
 2. Collector
 3. Emitter

BV_{CEO} = 20V
I_c = 800mA
V_{CE (SAT)}, = 0.15V(typ.) @I_c / I_b = 400mA / 20mA

Features

- ✧ Low V_{CE (SAT)}.
- ✧ Excellent DC current gain characteristics

Structure

- ✧ Epitaxial planar type.
- ✧ NPN silicon transistor

Ordering Information

Part No.	Packing	Package
TSB1664CY	Tape & Reel	SOT-89

Absolute Maximum Rating (Ta = 25 °C unless otherwise noted)

Parameter	Symbol	Limit	Unit
Collector-Base Voltage	V _{CBO}	40V	V
Collector-Emitter Voltage	V _{CEO}	20V	V
Emitter-Base Voltage	V _{EBO}	5	V
Collector Current	DC	I _c	A
	Pulse	0.8	
Collector Power Dissipation	SOT-89	1.5 (note 1)	W
		0.5	
		2 (note 2)	
Operating Junction Temperature	T _J	+150	°C
Operating Junction and Storage Temperature Range	T _{STG}	- 55 to +150	°C

Note: 1. Single pulse, Pw = 20mS, Duty <= 50%
 2. When mounted on a 40 x 40 x 0.7mm ceramic board

Electrical Characteristics

Ta = 25 °C unless otherwise noted

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Static						
Collector-Base Voltage	I _C = 10uA, I _E = 0	BV _{CBO}	40			V
Collector-Emitter Breakdown Voltage	I _C = 1mA, I _B = 0	BV _{CEO}	20			V
Emitter-Base Breakdown Voltage	I _E = 10uA, I _C = 0	BV _{EBO}	5			V
Collector Cutoff Current	V _{CB} = 20V, I _E = 0	I _{CBO}			0.5	uA
Emitter Cutoff Current	V _{EB} = 4V, I _C = 0	I _{EBO}			0.5	uA
Collector-Emitter Saturation Voltage	I _C / I _B = 400mA / 20mA	V _{CE(SAT)1}		0.15	0.3	V
Collector-Emitter Saturation Voltage	I _C / I _B = 800mA / 80mA	V _{CE(SAT)2}		0.25	0.5	V
DC Current Transfer Ratio	V _{CE} = 2V, I _C = 0.1A	h _{FE}	82		560	
Transition Frequency	V _{CE} = 5V, I _C = 50mA, f = 100MHz	f _T		150		MHz
Output Capacitance	V _{CB} = 10V, f = 1MHz	C _{ob}		20	30	pF

Note : pulse test: pulse width <=380uS, duty cycle <=2%

Classification Of h_{FE}

Rank	P	Q	R	S
Range	82 - 180	120 - 270	180 - 390	270 - 560

Electrical Characteristics Curve

Figure 1. Current Gain vs Collector Current

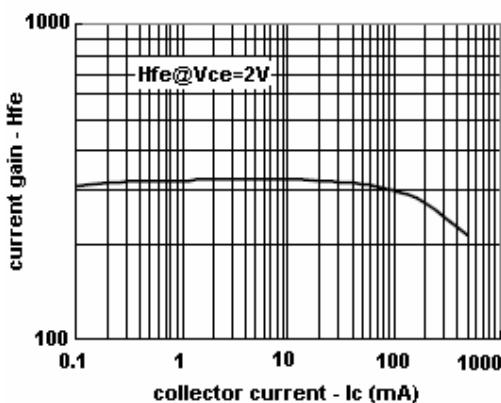


Figure 2. Saturation Voltage vs Collector Current

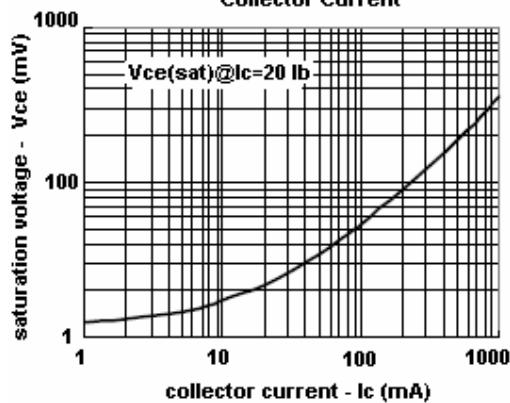


Figure 3. Saturation Voltage vs Collector Current

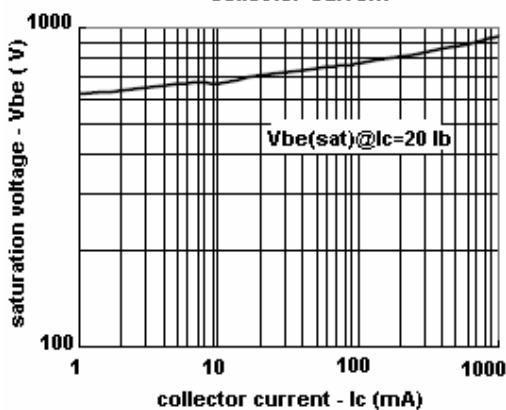


Figure 4. Power Derating Curves



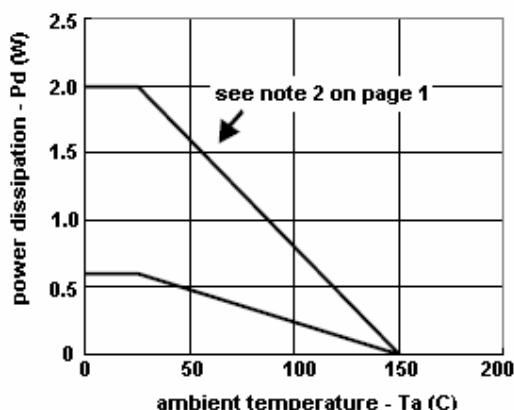


Figure 5. Cutoff Frequency vs Collector Current

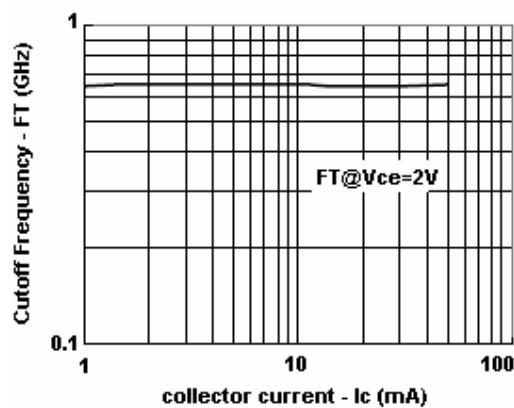

SOT-89 Mechanical Drawing

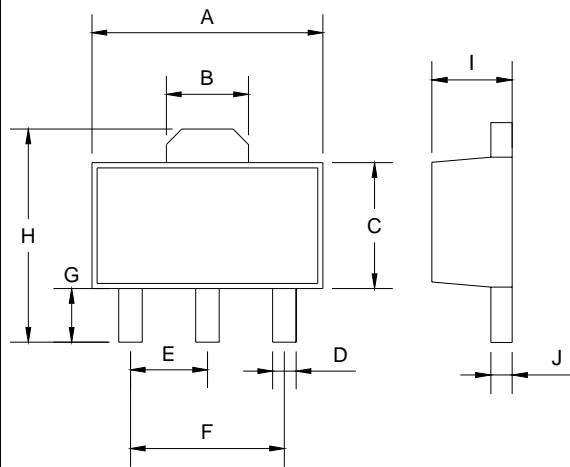

DIM	SOT-89 DIMENSION			
	MILLIMETERS	INCHES	MIN	MAX
A	4.40	0.173	4.60	0.181
B	1.50	0.059	1.7	0.070
C	2.30	0.090	2.60	0.102
D	0.40	0.016	0.52	0.020
E	1.50	0.059	1.50	0.059
F	3.00	0.118	3.00	0.118
G	0.89	0.035	1.20	0.047
H	4.05	0.159	4.25	0.167
I	1.4	0.055	1.6	0.068
J	0.35	0.014	0.44	0.017