




Surface Mount TRANSZORB® Transient Voltage Suppressors




DO-213AB (GL41)

Breakdown Voltage 6.8 to 200V
Peak Pulse Power 400W

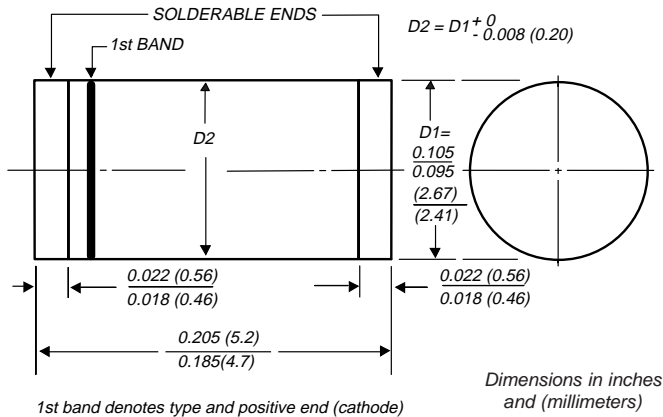

Mounting Pad Layout

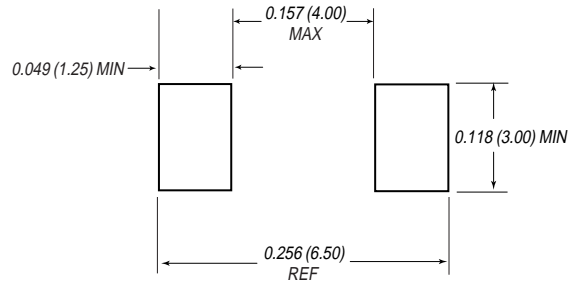

Mechanical Data

Case: JEDEC DO-213AB molded plastic body over passivated junction

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

High temperature soldering guaranteed:
250°C/10 seconds at terminals

Polarity: Blue bands denotes the cathode which is positive with respect to the anode under normal TVS operation

Mounting Position: Any

Weight: 0.0046 oz., 0.166 g

Packaging codes/options:

26/5K per 13" Reel (12mm tape), 60K/box
46/1.5K per 7" Reel (12mm tape), 30K/box

Features

- Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- For surface mounted applications
- Glass passivated junction
- Excellent clamping capability
- Low incremental surge resistance
- Very fast response time
- 400W peak pulse capability with a 10/1000µs waveform, repetition rate (duty cycle): 0.01% (200W above 91V)
- For devices with $V_{(BR)} \geq 10V$, I_D are typically less than 1.0µA
- High temperature soldering guaranteed: 250°C/10 seconds at terminals
- Available in unidirectional only

Maximum Ratings & Thermal Characteristics Ratings at 25°C ambient temperature unless otherwise specified.

| Parameter | Symbol | Value | Unit |
|---|-----------------------------------|----------------|------|
| Peak pulse power dissipation with a 10/1000µs waveform ⁽¹⁾ (Fig. 1) | PPPM | Minimum 400 | W |
| Steady state power dissipation at $T_L = 75^\circ C$ ⁽²⁾ | PM(AV) | 1.0 | W |
| Peak pulse current with a 10/1000µs waveform ⁽¹⁾ (Fig. 3) | I _{PPM} | See Next Table | A |
| Peak forward surge current, 8.3 ms single half sine-wave unidirectional only ⁽³⁾ | I _{FSM} | 40 | A |
| Maximum instantaneous forward voltage at 25A for unidirectional only | V _F | 3.5 | V |
| Operating junction and storage temperature range | T _J , T _{STG} | -55 to +150 | °C |

Notes: (1) Non-repetitive current pulse, per Fig.3 and derated above $T_A = 25^\circ C$ per Fig. 2. Rating is 200W above 91V.

(2) Mounted on copper pads to each terminal of 0.31 in² (8.0 mm²) per Fig. 5

(3) Measured at 8.3ms single half sine-wave or equivalent square wave duty cycle = 4 pulses per minute maximum

TGL41-6.8 thru TGL41-200A



Vishay Semiconductors
formerly General Semiconductor

Electrical Characteristics (T_A = 25°C unless otherwise noted)

| Device Type | Breakdown Voltage V _{BR} (V) ⁽¹⁾ | | Test Current at I _T (mA) | Stand-off Voltage V _{WM} (V) | Maximum Reverse Leakage at V _{WM} I _D (μA) | Maximum Peak Pulse Current I _{PPM} (A) ⁽²⁾ | Maximum Clamping Voltage at I _{PPM} V _C (V) | Maximum Temperature Coefficient of V _{BR} (% / °C) |
|-------------|---|------|---|---|--|---|--|--|
| | Min | Max | | | | | | |
| TGL41-6.8 | 6.12 | 7.48 | 10 | 5.50 | 1000 | 37.0 | 10.8 | 0.060 |
| TGL41-6.8A | 6.45 | 7.14 | 10 | 5.80 | 1000 | 38.1 | 10.5 | 0.060 |
| TGL41-7.5 | 6.75 | 8.25 | 10 | 6.05 | 500 | 34.2 | 11.7 | 0.064 |
| TGL41-7.5A | 7.13 | 7.88 | 10 | 6.40 | 500 | 35.4 | 11.3 | 0.064 |
| TGL41-8.2 | 7.38 | 9.02 | 10 | 6.63 | 200 | 32.0 | 12.5 | 0.068 |
| TGL41-8.2A | 7.79 | 8.61 | 10 | 7.02 | 200 | 33.1 | 12.1 | 0.068 |
| TGL41-9.1 | 8.19 | 10.0 | 1.0 | 7.37 | 50.0 | 29.0 | 13.8 | 0.071 |
| TGL41-9.1A | 8.65 | 9.55 | 1.0 | 7.78 | 50.0 | 29.9 | 13.4 | 0.071 |
| TGL41 -10 | 9.00 | 11.0 | 1.0 | 8.10 | 10.0 | 26.7 | 15.0 | 0.076 |
| TGL41 -10A | 9.50 | 10.5 | 1.0 | 8.55 | 10.0 | 27.6 | 14.5 | 0.076 |
| TGL41 -11 | 9.90 | 12.1 | 1.0 | 8.92 | 5.0 | 24.7 | 16.2 | 0.078 |
| TGL41 -11A | 10.5 | 11.6 | 1.0 | 9.40 | 5.0 | 25.6 | 15.6 | 0.078 |
| TGL41-12 | 10.8 | 13.2 | 1.0 | 9.72 | 5.0 | 23.1 | 17.3 | 0.081 |
| TGL41-12A | 11.4 | 12.6 | 1.0 | 10.2 | 5.0 | 24.0 | 16.7 | 0.081 |
| TGL41-13 | 11.7 | 14.3 | 1.0 | 10.5 | 5.0 | 21.1 | 19.0 | 0.084 |
| TGL41-13A | 12.4 | 13.7 | 1.0 | 11.1 | 5.0 | 22.0 | 18.2 | 0.084 |
| TGL41-15 | 13.5 | 16.5 | 1.0 | 12.1 | 5.0 | 18.2 | 22.0 | 0.087 |
| TGL41-15A | 14.3 | 15.8 | 1.0 | 12.8 | 5.0 | 18.9 | 21.2 | 0.087 |
| TGL41-16 | 14.4 | 17.6 | 1.0 | 12.9 | 5.0 | 17.0 | 23.5 | 0.089 |
| TGL41-16A | 15.2 | 16.8 | 1.0 | 13.6 | 5.0 | 17.8 | 22.5 | 0.089 |
| TGL41-18 | 16.2 | 19.8 | 1.0 | 14.5 | 5.0 | 15.1 | 26.5 | 0.091 |
| TGL41-18A | 17.1 | 18.9 | 1.0 | 15.3 | 5.0 | 15.9 | 25.2 | 0.091 |
| TGL41-20 | 18.0 | 22.0 | 1.0 | 16.2 | 5.0 | 13.7 | 29.1 | 0.093 |
| TGL41-20A | 19.0 | 21.0 | 1.0 | 17.1 | 5.0 | 14.4 | 27.7 | 0.093 |
| TGL41-22 | 19.8 | 24.2 | 1.0 | 17.8 | 5.0 | 12.5 | 31.9 | 0.095 |
| TGL41-22A | 20.9 | 23.1 | 1.0 | 18.8 | 5.0 | 13.1 | 30.6 | 0.095 |
| TGL41-24 | 21.6 | 26.4 | 1.0 | 19.4 | 5.0 | 11.5 | 34.7 | 0.097 |
| TGL41-24A | 22.8 | 25.2 | 1.0 | 20.5 | 5.0 | 12.0 | 33.2 | 0.097 |
| TGL41-27 | 24.3 | 29.7 | 1.0 | 21.8 | 5.0 | 10.2 | 39.1 | 0.099 |
| TGL41-27A | 25.7 | 28.4 | 1.0 | 23.1 | 5.0 | 10.7 | 37.5 | 0.099 |
| TGL41-30 | 27.0 | 33.0 | 1.0 | 24.3 | 5.0 | 9.2 | 43.5 | 0.100 |
| TGL41-30A | 28.5 | 31.5 | 1.0 | 25.6 | 5.0 | 9.7 | 41.4 | 0.100 |
| TGL41-33 | 29.7 | 36.3 | 1.0 | 26.8 | 5.0 | 8.4 | 47.7 | 0.101 |
| TGL41-33A | 31.4 | 34.7 | 1.0 | 28.2 | 5.0 | 8.8 | 45.7 | 0.101 |
| TGL41-36 | 32.4 | 39.6 | 1.0 | 29.1 | 5.0 | 7.7 | 52.0 | 0.102 |
| TGL41-36A | 34.2 | 37.8 | 1.0 | 30.8 | 5.0 | 8.0 | 49.9 | 0.102 |
| TGL41-39 | 35.1 | 42.9 | 1.0 | 31.6 | 5.0 | 7.1 | 56.4 | 0.103 |
| TGL41-39A | 37.1 | 41.0 | 1.0 | 33.3 | 5.0 | 7.4 | 53.9 | 0.103 |
| TGL41-43 | 38.7 | 47.3 | 1.0 | 34.8 | 5.0 | 6.5 | 61.9 | 0.104 |
| TGL41-43A | 40.9 | 45.2 | 1.0 | 36.8 | 5.0 | 6.7 | 59.3 | 0.104 |



Electrical Characteristics (T_A = 25°C unless otherwise noted)

| Device Type | Breakdown Voltage V _{BR} (V) ⁽¹⁾ | | Test Current at I _T (mA) | Stand-off Voltage V _{WM} (V) | Maximum Reverse Leakage at V _{WM} I _D (μA) | Maximum Peak Pulse Current I _{PPM} (A) ⁽²⁾ | Maximum Clamping Voltage at I _{PPM} V _C (V) | Maximum Temperature Coefficient of V _{BR} (% / °C) |
|-------------|--|-------|-------------------------------------|---------------------------------------|--|--|---|---|
| | Min | Max | | | | | | |
| TGL41-47 | 42.3 | 51.7 | 1.0 | 38.1 | 5.0 | 5.9 | 67.8 | 0.104 |
| TGL41-47A | 44.7 | 49.4 | 1.0 | 40.2 | 5.0 | 6.2 | 64.8 | 0.104 |
| TGL41-51 | 45.9 | 56.1 | 1.0 | 41.3 | 5.0 | 5.4 | 73.5 | 0.105 |
| TGL41-51A | 48.5 | 53.6 | 1.0 | 43.6 | 5.0 | 5.7 | 70.1 | 0.105 |
| TGL41-56 | 50.4 | 61.6 | 1.0 | 45.4 | 5.0 | 5.0 | 80.5 | 0.106 |
| TGL41-56A | 53.2 | 58.8 | 1.0 | 47.8 | 5.0 | 5.2 | 77.0 | 0.106 |
| TGL41-62 | 55.8 | 68.2 | 1.0 | 50.2 | 5.0 | 4.5 | 89.0 | 0.107 |
| TGL41-62A | 58.9 | 65.1 | 1.0 | 53.0 | 5.0 | 4.7 | 85.0 | 0.107 |
| TGL41-68 | 61.2 | 74.8 | 1.0 | 55.1 | 5.0 | 4.1 | 98.0 | 0.107 |
| TGL41-68A | 64.6 | 71.4 | 1.0 | 58.1 | 5.0 | 4.3 | 92.0 | 0.107 |
| TGL41-75 | 67.5 | 82.5 | 1.0 | 60.7 | 5.0 | 3.7 | 108 | 0.108 |
| TGL41-75A | 71.3 | 78.8 | 1.0 | 64.1 | 5.0 | 3.9 | 103 | 0.108 |
| TGL41-82 | 73.8 | 90.2 | 1.0 | 66.4 | 5.0 | 3.4 | 118 | 0.108 |
| TGL41-82A | 77.9 | 86.1 | 1.0 | 70.1 | 5.0 | 3.5 | 113 | 0.108 |
| TGL41-91 | 81.9 | 100.0 | 1.0 | 73.7 | 5.0 | 3.1 | 131 | 0.109 |
| TGL41-91A | 86.5 | 95.50 | 1.0 | 77.8 | 5.0 | 3.2 | 125 | 0.109 |
| TGL41-100 | 90.0 | 110.0 | 1.0 | 81.0 | 5.0 | 1.39 | 144 | 0.109 |
| TGL41-100A | 95.0 | 105.0 | 1.0 | 85.5 | 5.0 | 1.46 | 137 | 0.109 |
| TGL41-110 | 99.0 | 121.0 | 1.0 | 89.2 | 5.0 | 1.27 | 158 | 0.110 |
| TGL41-110A | 105.0 | 116.0 | 1.0 | 94.0 | 5.0 | 1.32 | 152 | 0.110 |
| TGL41-120 | 108.0 | 132.0 | 1.0 | 97.2 | 5.0 | 1.16 | 173 | 0.110 |
| TGL41-120A | 114.0 | 126.0 | 1.0 | 102.0 | 5.0 | 1.21 | 165 | 0.110 |
| TGL41-130 | 117.0 | 143.0 | 1.0 | 105.0 | 5.0 | 1.07 | 187 | 0.110 |
| TGL41-130A | 124.0 | 137.0 | 1.0 | 111.0 | 5.0 | 1.12 | 179 | 0.110 |
| TGL41-150 | 135.0 | 165.0 | 1.0 | 121.0 | 5.0 | 0.93 | 215 | 0.111 |
| TGL41-150A | 143.0 | 158.0 | 1.0 | 128.0 | 5.0 | 0.97 | 207 | 0.111 |
| TGL41-160 | 144.0 | 176.0 | 1.0 | 130.0 | 5.0 | 0.87 | 230 | 0.111 |
| TGL41-160A | 152.0 | 168.0 | 1.0 | 136.0 | 5.0 | 0.91 | 219 | 0.111 |
| TGL41-170 | 153.0 | 187.0 | 1.0 | 138.0 | 5.0 | 0.82 | 244 | 0.111 |
| TGL41-170A | 162.0 | 179.0 | 1.0 | 145.0 | 5.0 | 0.85 | 234 | 0.111 |
| TGL41-180 | 162.0 | 198.0 | 1.0 | 146.0 | 5.0 | 0.78 | 258 | 0.111 |
| TGL41-180A | 171.0 | 189.0 | 1.0 | 154.0 | 5.0 | 0.81 | 246 | 0.111 |
| TGL41-200 | 180.0 | 220.0 | 1.0 | 162.0 | 5.0 | 0.70 | 287 | 0.111 |
| TGL41-200A | 190.0 | 210.0 | 1.0 | 171.0 | 5.0 | 0.73 | 274 | 0.111 |







- Notes:** (1) V_{BR} measured after I_T applied for 300μs square wave pulse or equivalent
(2) Surge current waveform per Figure 3 and derate per Fig.2
(3) All terms and symbols are consistent with ANSI/IEEE C62.35

TGL41-6.8 thru TGL41-200A



Vishay Semiconductors
formerly General Semiconductor

Ratings and Characteristic Curves ($T_A = 25^\circ\text{C}$ unless otherwise noted)

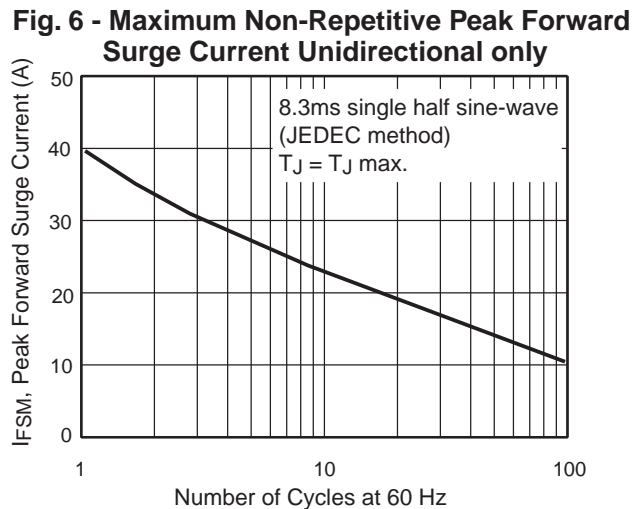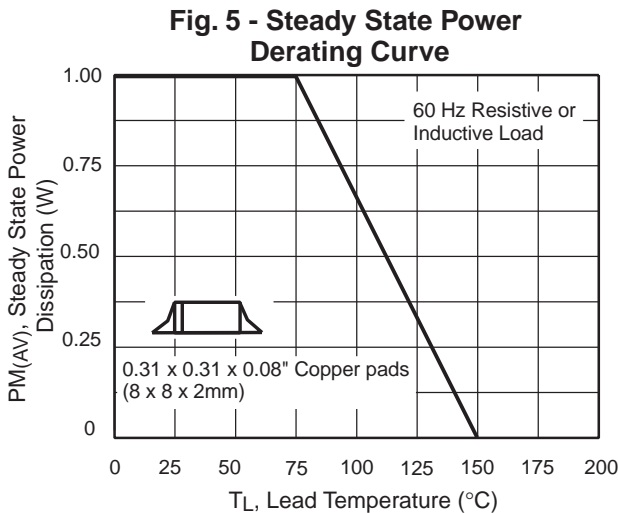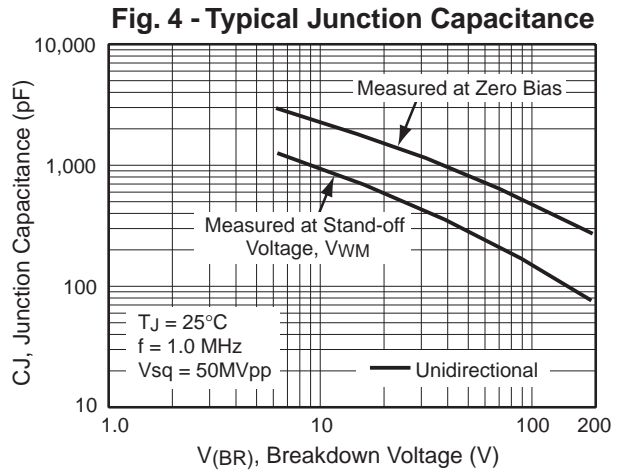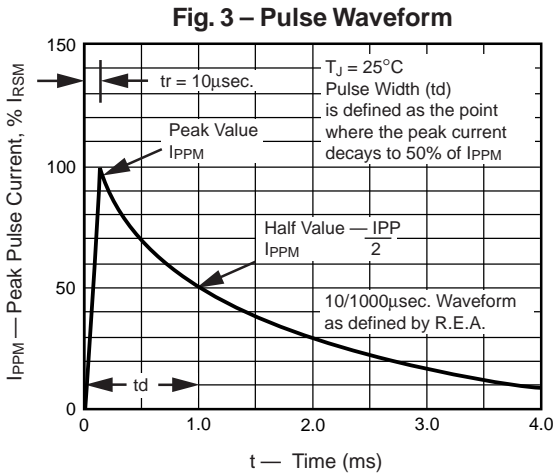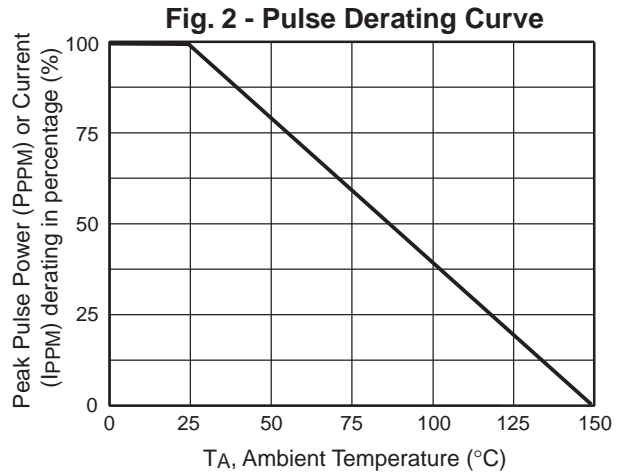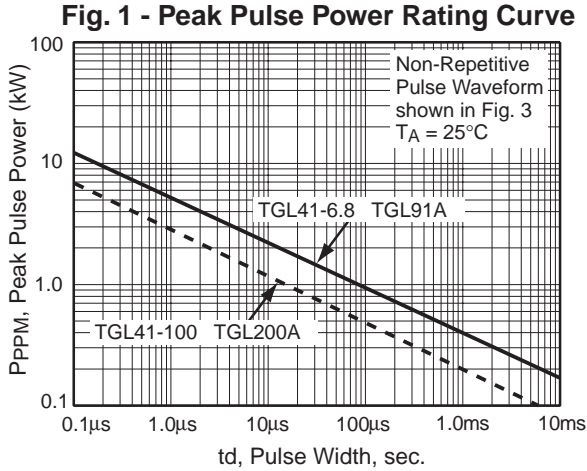



Notice

Specifications of the products displayed herein are subject to change without notice. Vishay Intertechnology, Inc., or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document. Except as provided in Vishay's terms and conditions of sale for such products, Vishay assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of Vishay products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Vishay for any damages resulting from such improper use or sale.