




**BVZ-915EA4**



**PACKAGE CONFIGURATION**

**DESCRIPTION**

Dice Material : AlGaInP Orange Red  
Light Color : Orange Red Color  
Lens Color : Water Transparent

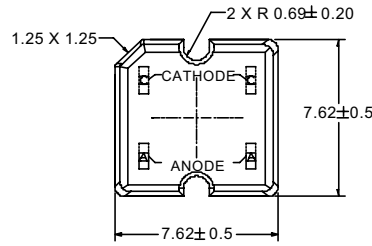

**RADIATION PATTERN**

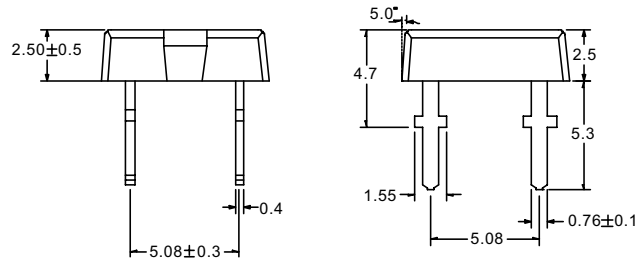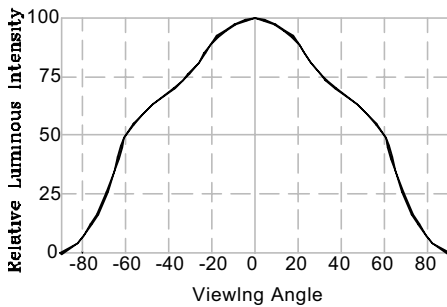

Tolerance ± 0.25 mm

**ABSOLUTE MAXIMUM RATINGS AT Ta = 25 °C**

PARAMETER	MAX.	UNIT
Power Dissipation	140	mW
Continuous Forward Current	50	mA
Peak Forward Current ( 1/10 Duty Cycle , 0.1ms Pulse Width )	100	mA
Reverse Voltage	5	V
Derating Linear From 50 °C	0.9	mA/°C
Operating Temperature Range	-40 to + 100	°C
Storage Temperature Range	-55 to + 100	°C
LED Junction Temperature	125	°C
Soldering Preheat Temperature	100 °C for 30 seconds	
Lead Solder Temperature ( 1.5mm Below Seating Plane )	250 °C for 5 seconds	

**ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta = 25 °C**

SYMBOL	PARAMETER	TEST COND.	MIN.	TYP.	MAX.	UNIT
V <sub>F</sub>	Forward Voltage	I <sub>F</sub> = 50mA		2.3	2.8	V
I <sub>R</sub>	Reverse Current	V <sub>R</sub> = 5V			100	μA
λ <sub>p</sub>	Peak Emission Wavelength	I <sub>F</sub> = 50mA		623		nm
λ <sub>d</sub>	Dominant Wavelength	I <sub>F</sub> = 50mA		617		nm
2θ <sub>1/2</sub>	Viewing Angle	I <sub>F</sub> = 50mA		120		Deg
I <sub>V</sub> / Φ <sub>V</sub>	Luminous Intensity / Total Flux			0.3		cd/lm
R <sub>θj-pin</sub>	Thermal Resistance			125		°C/W

**BIN GRADE LIMITS ( I F = 50 mA ) Total Flux / lm**

Bin	D	E	F	G	H	I
Min.	1.7	2.2	2.8	3.6	4.7	6.0
Max.	2.2	2.8	3.6	4.7	6.0	7.8

Tolerance ± 15%lm

\*Bright View reserves the rights to alter specifications and remove availability of products at any time without notice.

\*Dominant Wavelength, λ<sub>d</sub> is according to CIE Chromaticity Diagram base on color of the device.

\*θ<sub>1/2</sub> is the off-axis angle where the luminous intensity is one half the on-axis intensity.



**BVZ-915EA4**

**TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES**

FIG. 1 Forward Current vs. Forward Voltage  
( Ta = 25 °C )

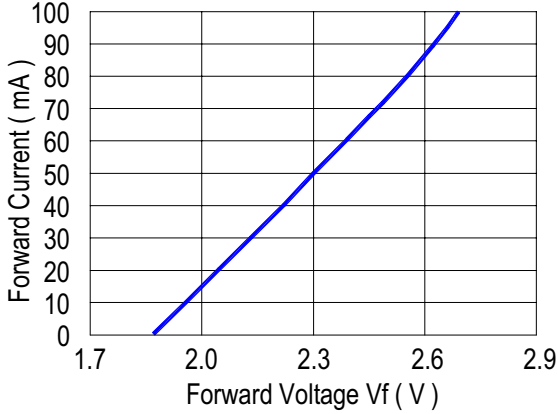


FIG. 2 Relative Total Flux vs. Forward Current  
( Ta = 25 °C )

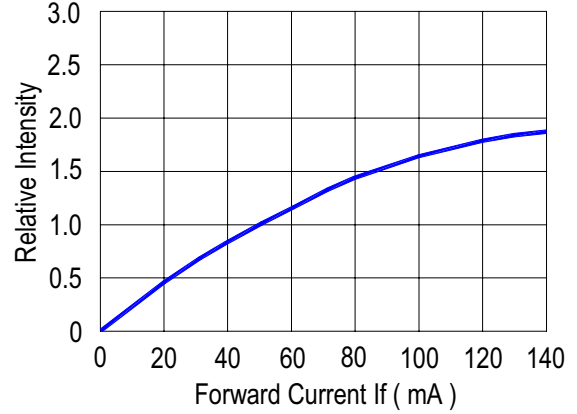


FIG. 3 Forward Voltage vs. Temperature

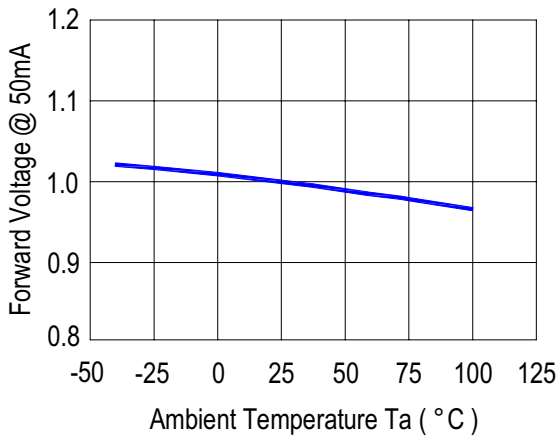


FIG. 4 Relative Intensity vs. Temperature

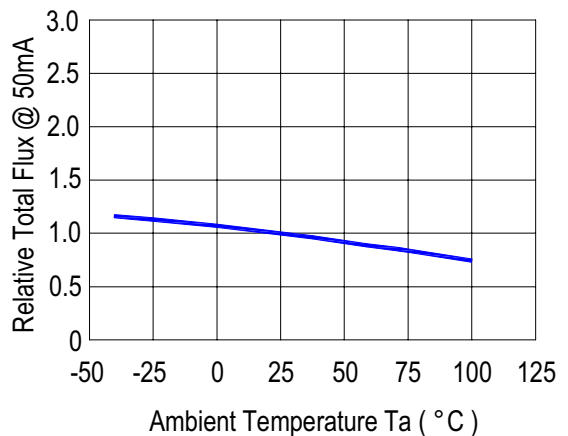


FIG. 5 Relative Intensity vs. Wavelength ( λp )  
( Ta = 25 °C )



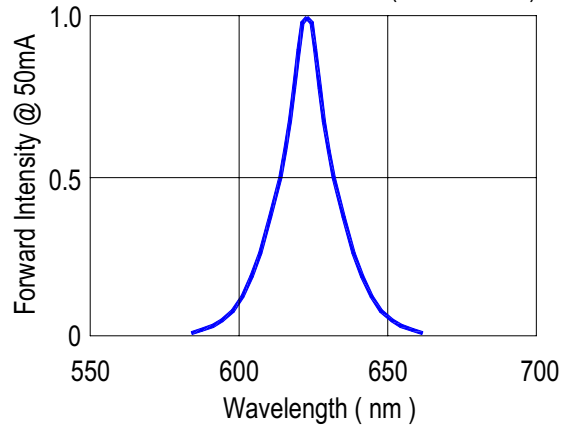


FIG. 6 Maximum Forward Current  
vs. Temperature



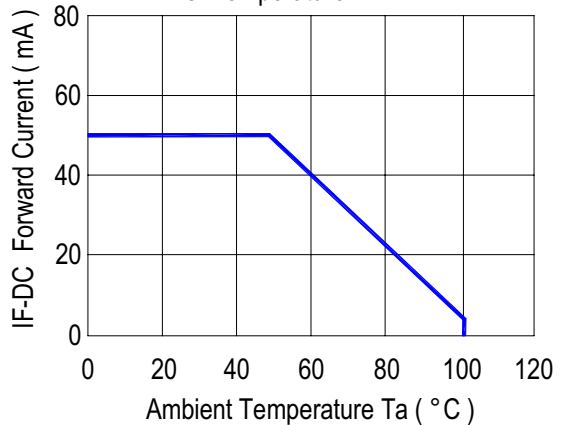

Tube  
Dimension(cm): 1.27\* 0.97\* 48.5  
60PCS / Tube

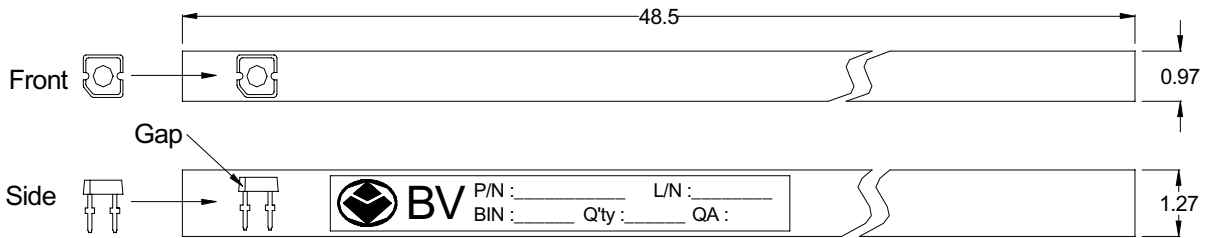

BOX  
Dimension(cm): 10.5 \* 13.5 \* 50.5  
100 Tubes / Box  
Box : 6,000PCS

**Bright View** Electronics Co.,Ltd.


PART NO.:   BVZ-91XXXX  

LOT NO.:                   


GRADE:   X- Δ - ■  

Q'ty            pcs   QA  

X: Bin grade  
Δ: Wavelength  
■: Vf

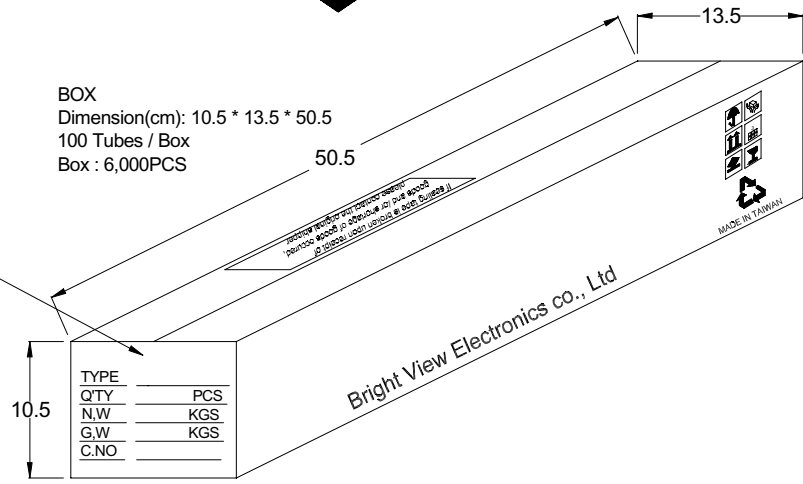

CARTON  
Dimension(cm): 23\*30\*52

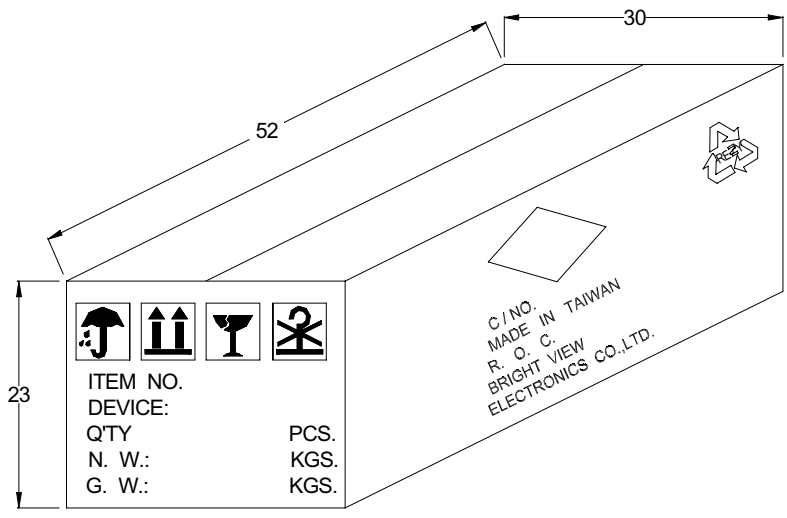

4 Boxes / Carton  
Total : 24,000PCS