
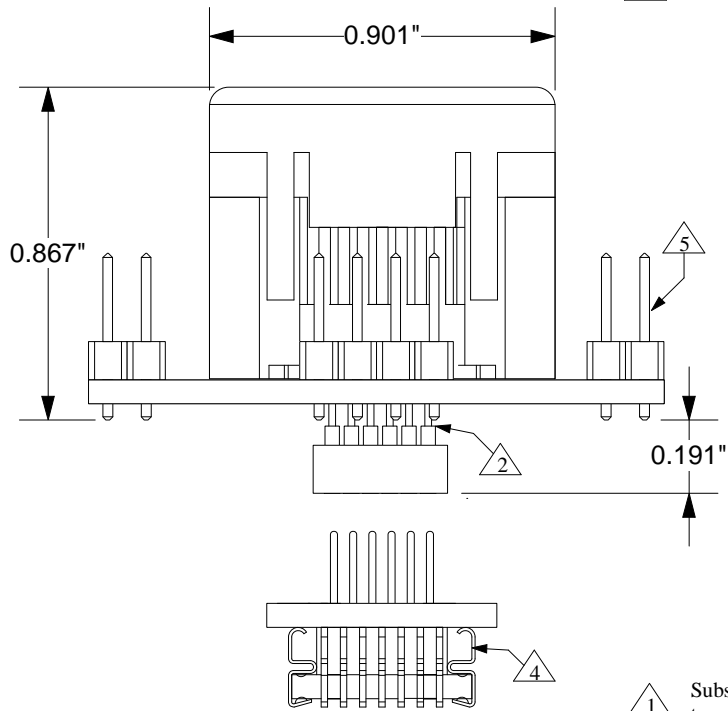


Top View

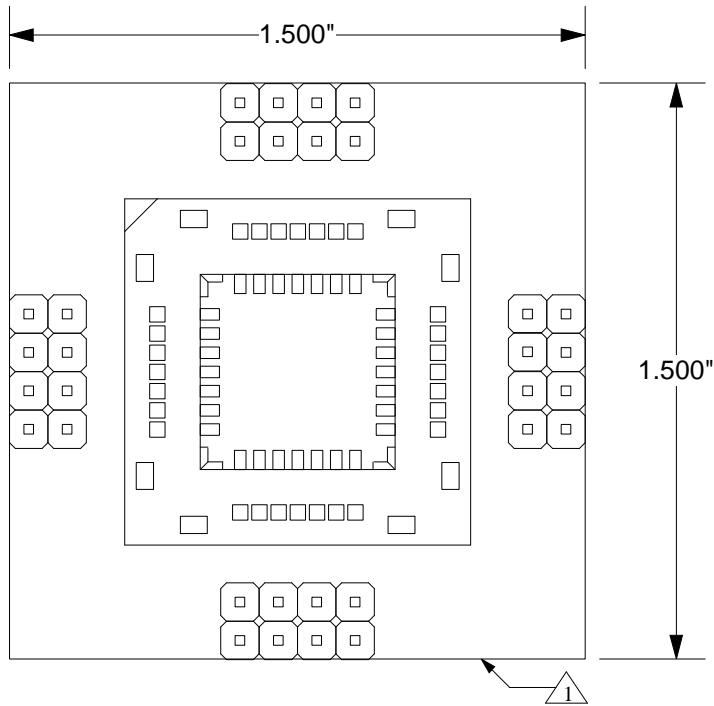

Side View

- ① Substrate: 0.0625"±0.007" FR4/G10 or equivalent high temp material. 1/2 oz. Cu clad. SnPb plating
- ② Pins: Material- Brass Alloy 360 1/2 hard; finish- 10µ" Au over 50µ" Ni (min.).
- ④ Leads: material- BeCu Alloy 194; plating- 80/20 SnPb.
- ⑤ Test points: material- Phosphor Bronze; plating- Sn over 50µ" Ni. Gold flash on contact end.

Description: CARRIER ADAPTOR
 28 position PLCC ZIF socket with test points to 28 position PLCC plug.

All tolerances: ±0.005" (unless stated otherwise). Materials and specifications are subject to change without notice.

	CA-PLCC28-Z-P-T-01 Drawing	Status: released	Scale: 2:1	Rev: B
	© 1998 IRONWOOD ELECTRONICS, INC. PO BOX 21151 ST. PAUL, MN 55121 Tele: (651) 452-8100 www.ironwoodelectronics.com	Drawing by: P. LeBeau	Date: 4/21/98	
		File:CA-PLCC28-Z-P-T-01 Dwg	Modified:	