


## FEMALE HEADER

- Industry compatible
- Competitively priced
- Dual Row
- No of contacts 10-100
- Gold plating contacts
- 1.27mm pitch

## FEMALE HEADER SMT/THROUGH HOLE 1.27 PITCH

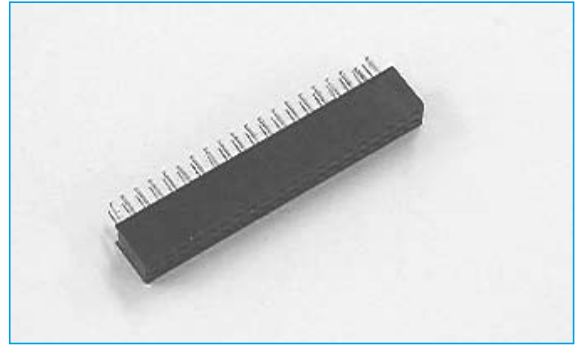

SECTION 8

### SPECIFICATION

#### Material & Finish



**Insulator:** LCP, glass reinforced, rated UL 94V-0  
**Contact:** Phosphor Bronze

#### Electrical Characteristics





**Rating Current:** 0.5 Amp DC  
**Contact Resistance:** 30 mΩ  
**Insulation Resistance:** 1000 MΩ min.  
**Dielectric Voltage:** 250v AC for 1 minute  
**Operating Temperature:** -40°C to +105°C

\* Mating suggestion: C11, C12 series.

### OUTLINE DRAWING

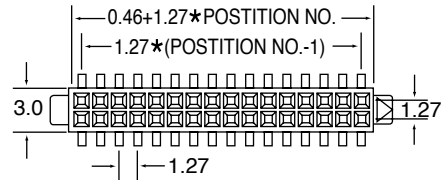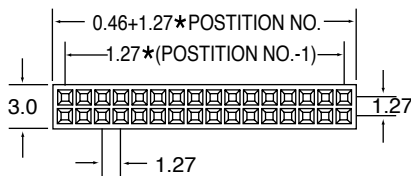

Type	X	Y
A	3.4	3.6
B	4.3	4.5

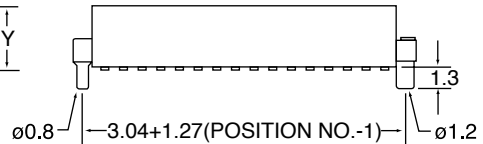

### ORDERING INFORMATION

DBC	B28	D	10	B	G	A	B	B	1
Dubilier Connectors	Series	No. of Rows	No. of Contacts	Contact Material	Contact Plating	Mounting Type	Height	Peg	Colour
		D = Dual Row	05-50	B = Phosphor Bronze	G = Gold	A = Through hole B = SMT	B = 4.3mm	B = Without	1 = Black